# CATALOGUE 2025 INNOVATIVE SURGE PROTECTION





# INDEX



|--|

The company.

#### SURGE PROTECTIVE DEVICES (SPDs) - WHY?

Limiting surge voltages and diverting surge currents.

# 5 LIGHTNING GROUND FLASH DENSITY

Statistics

#### REFERENCE STANDARDS

International standards on surge protection.

#### **TERMINOLOGY**

Technical terms and definitions.

#### **PARAMETERS FOR SPD SELECTION** 10

Features and specific values.

# 14 LIGHTNING: SOURCE OF DAMAGE

Selection of SPDs according to the expected impact points.

# 16 LOCATION AND ARRANGEMENT

Selection of SPDs according to the lightning protection zone concept.

# 17 LIGHTNING THREAT PARAMETERS

Lightning protection levels (LPLs) and SPDs discharge capability.

#### **POWER DISTRIBUTION SYSTEMS** 18

Installation of SPDs in TN-TT- and IT-Systems.

#### **SELECTION OF ZOTUP SPDs** 20

Product range overview.

#### **THE WEBAPP**

Easy way to select the right SPD in accordance with HD 60364-5-53.

#### THE INNOVATIVE FEATURES OF OUR NEW PRODUCTS

Main features.

#### SPDs FOR LOW VOLTAGE ALTERNATING CURRENT (AC) APPLICATIONS 30

SPDs for low voltage applications in AC.

#### SPDs FOR ALTERNATING CURRENT (AC) WITH ADDITIONAL FILTER 89

SPDs extensive protection against transients and all kinds of conducted inteferences.

#### SPDs FOR DIRECT CURRENT (DC) AND PHOTOVOLTAIC SYSTEMS 100

SPDs for DC and specific SPDs for PV application.

#### SPDs FOR LED LIGHTING 106

SPDs ready to be fitted in lighting poles in highly lightning exposed areas.

#### **SPDs FOR SIGNALLING AND TELECOMMUNICATION NETWORKS** 111

SPDs for signalling and telecommunication circuits.

#### **SPDs FOR DATA TRANSMISSION** 125

SPDs for data transmission circuits.

#### **SURGE ARRESTERS FOR HIGH VOLTAGE SYSTEMS (HV)** 132

High voltage surge arresters.

#### **INDEX** 142

Cross reference table with Code, model and GITIN (EAN).

## WHO WE ARE

#### THE COMPANY

**ZOTUP** is our company. Since 1986 we focus our efforts on the development of solutions for surge protection and on the production of Surge Protective Devices. We strive to serve our customers with highest quality products and services.

**ZOTUP**'s values are pure and simple.

**SAFETY** Our ambition and goal is to provide

products that **protect people**, their property and their working

environment.

**QUALITY** Only through the **quality of our** 

**products** we can meet our promise.

**INNOVATION** Continuous further development

is the heartbeat of **ZOTUP**. Cutting -edge products are the answer to our

customers needs.

By means of these values, we at **ZOTUP** want to keep track with the market, today and tomorrow.






## SURGE PROTECTIVE DEVICES - WHY?


# REQUIRED BY HD 60364-4-443 AND BY THE EN IEC 62305 SERIES OF STANDARDS FOR PROTECTION AGAINST TRANSIENT OVERVOLTAGES OF ATMOSPHERIC ORIGIN.

In the Internet era and with the exponentially increasing use of electrical and electronic equipment containing sensitive integrated circuits and semi-conductors with high cost implication in case of damage, increasing attention to transient phenomena of atmospheric origin and to the resulting surges within the electric distribution systems and installations is required. The statistical analysis of damages published by insurance companies irrefutably demonstrates the dimension of the problem. The costs of damage and downtime due to these transient effects has the same order of magnitude as the costs of civil crime.

To prevent damages to people and equipment, to ensure continuity of the electrical supply and of communication services and to avoid the corresponding economic loss due to presence of such interferences, the realisation of highly effective protection measures for structures and buildings in the public, industrial and tertiary care infrastructure as well as for private premises is essential.

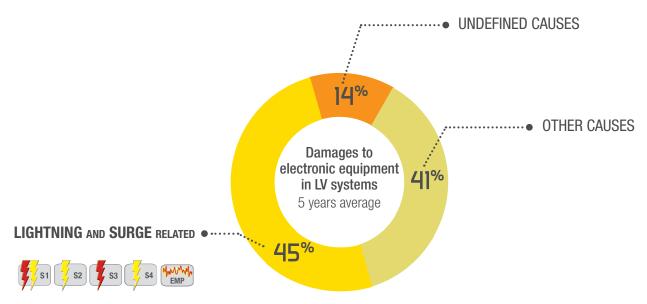


source: German Insurance Association (GDV); Berlin - 2009.

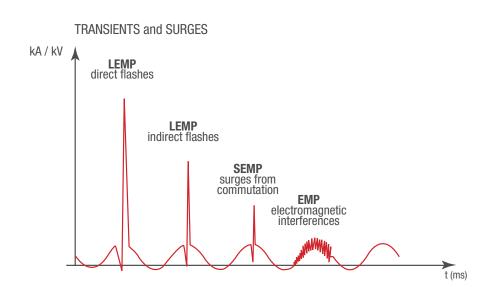



## LIGHTNING GROUND FLASH DENSITY

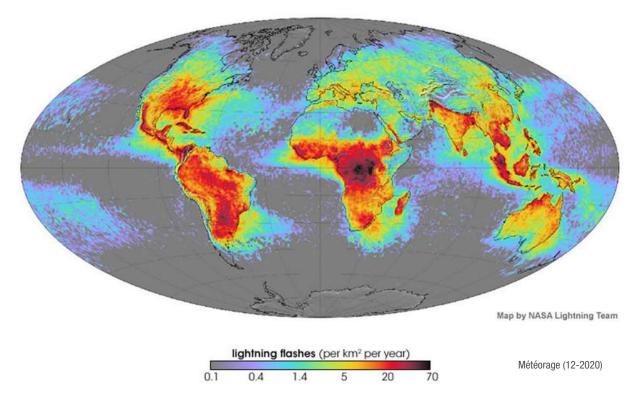

Source: Article by Hobart M. King.

NASA has satellites orbiting the Earth with sensors designed to detect lightning and collect data, which is transmitted to Earth, plotted geographically and used to construct a geographic record of lightning activity over time. The map above shows the average yearly counts of lightning per square kilometer based on data collected by NASA's Lightning Imaging Sensor on the Tropical Rainfall Measuring Mission satellite between 1995 and 2002. Places where less than one lightning occurred (on average) each year are gray or light purple; places with the largest number of lightning flash are deep red, grading to black.

Globally, there are about 40 to 50 lightning every second, or nearly 1.4 billion of lightning per year. These electrical discharges are powerful and deadly. Each year, lightning not only kill people and wildlife but are also responsible for billions of dollars in damage to buildings, communication systems, power lines, electrical equipment and billions of dollars per year in flight rerouting and delays. Thus, maps showing the distribution of lightning across the Earth — which is far from uniform - are important for economic, environmental and safety reasons. The ideal conditions for the appearance of lightning and associated thunderstorms occur where warm, moist air rises and mixes with cold air above: the heated land surface warms the air above it, and that warm air rises to encounter cold air aloft. The interaction between air masses of different temperature stimulates thunderstorms and lightning. These conditions occur almost daily in many regions on Earth, but only rarely in other regions. Moreover, much more lightning occurs over land than over the ocean because daily sunshine heats the land surface faster than the ocean. More lightning occurs near the equator than at the poles because not only the latter's frozen surfaces are not effectively warmed by the sun to produce convection but also there is very little moisture in polar air.

## DENSITY OF LIGHTNING FLASHES TO THE GROUND NG

The ground flash density  $N_G$  is the number of lightning flashes per  $km^2$  per year. These values are provided by recording of all the flashes detected by the corrresponding lightning location system (LLS) that covers the territory. The detection data registered by the LLS must be collected and processed, in order to calculate the annual number of dangerous events  $N_x$  according to EN IEC 62305-2. It is sufficient to provide the geographical coordinates (latitude/longitude) to retrieve the corresponding value of  $N_G$ . The ground flash density values are drawn from National databases where available. Where no such database is available, the standard EN IEC 62858 :2019 recommends to obtain the  $N_G$  by multiplying the  $N_t$  (total density of optical recorded flashes per  $km^2$  per year from NASA website) by 0,25.



## REFERENCE STANDARDS

Awareness, that transient surges are the main influencing factor of the MTBF (Mean Time Between Failures) of systems and equipment, is driving all manufacturers in the area of surge protection to continuously develop new overvoltage protective devices with increasing features and in compliance with the actual national and International standards.

The following is a list of the key standards involved:

#### IEC 61643-01 Ed. 1 (2024-12) EN IEC 61643-01 +A11 (2025-04)

Low-voltage surge protective devices:

Part 01: General Requirements and test methods

#### IEC 61643-11 Ed. 2 (2025-06) EN IEC 61643-11 +A11 (2025-10)

Low-voltage surge protective devices:

Part 11: Surge protective devices connected to AC low-voltage power systems

Requirements and test methods.

#### IEC 61643-12 Ed. 3 (2020-05) CLC/TS 61643-12 (2009-12)

Surge protective devices connected to low-voltage power systems. Selection and application principles.

#### IEC 61643-21 Ed. 2 (2025-xx) EN IEC 61643-21 +A11 (2025-xx)

Low-voltage surge protective devices.

Part 21: Surge protective devices connected to telecommunications and signalling networks

Requirements and test methods

#### IEC 61643-22 Ed. 2 (2015-06) CLC/TS 61643-22 (2016-03)

Surge protective devices connected to telecommunications and signalling networks. Selection and application principles.

#### IEC 61643-31 Ed. 1 (2018-01) EN 61643-31 (2019-10)

Surge protective devices.

Part 31: SPDs connected to the c.c. side of photovoltaic applications. Requirements and tests methods.

#### IEC 61643-32 (2017-09) CLC/TS 51643-32 (2020-07)

Low-voltage surge protective devices connected to the c.c. side of photovoltaic installations. Selection and application principles.

#### IEC 61643-41 Ed. 1 (2025-05) EN IEC 61643-41 +A11 (2025-08)

Low-voltage surge protective devices:

Part 41: Surge protective devices connected to DC low-voltage power systems

Requirements and test methods.

#### IEC 62305 series Ed. 3 (2024-09) EN IEC 62305 series (2024-10)

Protection against lightning.

Part 1: General principles; Part 2: Risk management;

Part 3: Physical damage to structures and life hazard;

Part 4: Electrical and electronic systems within structures.

on dotal oo.

#### IEC 60364-5-53 Ed. 4.2 (2024-12) HD 60364-5-53 (2022-05)

Low-voltage electrical installations.

Part 5-53: Selection and erection of electrical equipment. Isolation, switching and control. Clause 534: Devices for protection against transient overvoltages.

#### IEC 61000-4-5 Ed. 3.1 (2017-08) EN 61000-4-5 (2014-08) +A1 (2017-11)

Electromagnetic compatibility (EMC).

Part 4-5: Testing and measurement techniques. Surge immunity test.

#### IEC 61439 series EN (IEC) 61439 series

Low-voltage switchgear and controlgear assemblies

IEC 61439-1(2020) / EN IEC 61439-1 (2021)

Part 1: General rules

IEC 61439-2 (2020) / EN IEC 61439-2 (2021)
Part 2: Power switchgear and controlgear assemblies

IEC 61439-3 (2024) / EN IEC 61439-3 (2024) Part 3: Distribution boards intended to be operated by ordinary persons (DBO)

IEC 61439-4 (2023) / EN 61439-4 (2013) Part 4: Particular requirements for assemblies for construction sites (ACS)

IEC 61439-7 (2022) / EN IEC 61439-7 (2023) Part 7: Assemblies for specific applications such as marinas, camping sites, market squares, electric vehicle charging stations.



IEC 61643-31

Edition 1.0 2018-01

# INTERNATIONAL STANDARD

## NORME INTERNATIONALE



Low-voltage surge protective devices – Part 31: Requirements and test methods for SPDs for photovoltaic installations

Parafoudres basse renet-

pécifique y compris en courant continu – parafoudres pour installations

HARMONIZATION DOCUMENT
DOCUMENT D'HARMONISATION
HARMONISIERUNGSDOKUMENT

HD 60364-5-53

November 2015

ICS 91 140 50 29 120 50

Supersedes HD 50573-5-57:2014, HD 60364-5-53:2015

**English Version** 

Low-voltage electrical installations - Part 5-53: Selection and erection of electrical equipment - Switchgear and controlgear

Installations électriques basse tension - Partie 5-5 et mise en ceuvre des matériels électriques - A

This Harmonization Document was approved CEN/CENELEC Internal Regulations which

Up-to-date lists and bibliographical refere CENELEC Management Centre or to an

This Harmonization Document exists in

CENELEC members are the national Denmark, Estonia, Finland, Former Lithuania, Luxembourg, Malta, the Turkey and the United Kingdom. Errichten von Niederspannungsanlagen - Teil 5-53: Errichtung elektrischer Betriebsmittel - Schalt-



# INTERNATIONAL STANDARD

NORME INTERNATIONALE



Edition 1.0 2011-03



Low-voltage surge protective devices –
Part 11: Surge protective devices connected to low-voltage power systems –
Parafoudres because the surge of t

Parafoudres basse tension –
Partie 11: Parafoudres connectés aux systèmes basse tension – Exigences et

## **TERMINOLOGY**

Knowledge of some basic technical terms and definitions associated with SPDs will facilitate an understanding of the contents of this catalogue.

Please find below a selection of the most important.

#### **TT System**

Technique for the protection of persons: the exposed conductive parts are earthed and residual current devices (RCDs) are used.

#### **TN System**

Technique for the protection of persons: interconnection and earthing of exposed conductive parts and the neutral are mandatory.

#### **IT System**

Technique for the protection of persons:

- Interconnection and earthing of exposed conductive parts;
- Indication of the first fault by an insulation monitoring device (IMD);
- Interruption for the second fault using overcurrent protection (circuit-breakers or fuses).

#### T1 SPD or Type 1 (EN) / test class I (IEC)

SPD tested with nominal discharge current  $l_{\text{\tiny In}}$  and with impulse current  $l_{\text{\tiny Imp}}$ 

#### T2 SPD or Type 2 (EN) / test class II (IEC)

SPD tested with nominal discharge current  $I_n$  and with max. discharge current  $I_{\text{max}}$  (optional).

#### T3 SPD or Type 3 (EN) / test class III (IEC)

SPD tested with combination wave.

#### **Voltage switching SPD (GAP)**

SPD that has a high impedance when no surge is present, but can have a sudden change in impedance to a low value in response to a voltage surge. Common examples of components used in such SPDs are spark gaps, gas tubes and thyristors.

#### **Voltage limiting SPD**

SPD that has a high impedance when no surge is present, but will reduce it continuously with increased surge current and voltage.

Common examples of components used in such SPDs are varistors and avalanche diodes.

#### **Combination SPD**

SPD that incorporates both, voltage switching components and voltage limiting components. The SPD may exhibit voltage switching, limiting or both.

#### **N-PE SPD**

SPD intended exclusively for application between N and PE conductors in an installation.

#### **Mode of protection (of a SPD)**

An intended circuitry between two connections, that contains one or more protective components, e.g. line-to line, line-to-earth, line-to-neutral, neutral-to-earth.

#### **Multipole SPD**

SPD with more than one mode of protection, or a combination of electrically interconnected SPDs offered as a unit.

#### Maximum Continuous Operating Voltage (Uc)

Maximum r.m.s. voltage, which may be continuously applied to the SPD's mode of protection. This is comparable to the nominal voltage of other installation devices.

#### **Impulse discharge current (Iimp)**

Crest value of a discharge current through the SPD with specified charge transfer Q and specified energy W/R in the specified time. This characterises a T1 SPD. The characteristic waveform is  $10/350~\mu s$ .



#### Nominal discharge current (In)

Crest value of the current through the SPD with a current waveshape of  $8/20~\mu s$ . This characterises a T2 SPD.

#### Maximum discharge current (I<sub>max</sub>)

Crest value of a current through the SPD having an 8/20 µs waveshape and magnitude according to the manufacturers specification.

Imax is an optional parameter.

This parameter should not be considered for the selection of SPDs.

#### Discharge current (I<sub>d</sub>)

Presumed maximum crest value of the current through the SPD when subjected to a combination wave with an open circuit voltage equal to  $U_{\rm oc}$ . The real current through the SPD will always be lower than  $I_{\rm SC}$ .

#### Total discharge current (ITotal)

Current which flows through the PE or PEN terminal of a multipole SPD during the total discharge current test.

#### **Short-circuit current rating (Iscer)**

Maximum prospective short-circuit current from the power system for which the SPD, in conjunction with the disconnector specified, is rated.

#### Follow current (I<sub>f</sub>)

Peak current supplied by the electrical power system and flowing through the SPD after a discharge current impulse.

#### Follow current interrupt rating (In)

Prospective short-circuit current that an SPD is able to interrupt without operation of a disconnector.

#### No Follow Current® (NFC)

An SPD design not causing any follow current. SPDs with NFC-technology avoid any undesired current stress to disconnectors and protective devices upstream the SPD.

#### Open circuit voltage (Uoc)

Open circuit voltage of the combination wave generator at the point of connection of the device under test.

#### (Voltage) protection Level (Up)

Maximum voltage to be expected at the SPD terminals due to an impulse stress with defined voltage steepness and an impulse stress with a discharge current with given amplitude and waveshape.

#### **Noise level attenuation (dB)**

Reduction of the noise caused by electromagnetic interferences, both in common and differential mode.

#### Temporary Overvoltage (TOV)

Power frequency overvoltage of relatively long duration. A temporary overvoltage is undamped or weakly damped.

# SPD behaviour in case of Temporary Overvoltages TOV ( $U_T$ )

- Withstand without damage: withstand (W);
- or reach end of life in a safe way, maintaining its IP degree: safe (S).

#### **Status Indicator**

Device that indicates the operational status of an SPD or a part of an SPD. Such indicator may be local visual and may have remote signalling and output contact capability. Intermediate stages of the status indicator may also be provided before it has reached its end of life, e.g. for preventive maintenance.

#### **Pollution Degree (PD)**

Numeral characterizing the expected pollution of the relevant environment.

P.D. 1: No pollution or only dry, non-conductive pollution.

P.D. 2: Only non-conductive pollution, except an occasionally temporary conductivity caused by condensation.

P.D. 3: Conductive pollution or dry non-conductive pollution which becomes conductive due to expected condensation.



## PARAMETERS FOR SPD SELECTION

#### The parameters to be considered for SPD selection are many. The main ones are:

- Suitability for the power distribution system (TN, TT, IT);
- Maximum Continuous Operating Voltage (Uc);
- Behaviour in case of TOV (U<sub>T</sub>);
- SPD Type (and impulse current / voltage) **T1 T2 T3**;
- Short circuit current rating (Isccr);
- Back-up protection OCPD (fuse);
- Follow current interrupt rating (Ifi);
- Voltage protection level (Up);
- Pollution Degree;
- Response time (t<sub>a</sub>).

#### Maximum Continuous Operating Voltage Uc:

This is the maximum r.m.s. voltage, which may be continuously applied to the SPD's mode of protection. It is selected depending on:

- the nominal voltage of the circuit to be protected;
- the low voltage distribution system (TN, TT, IT);
- the required modes of protection (phase to earth; phase to neutral; neutral to earth).

#### Recommended $U_{\text{\tiny C}}$ values for 230/400 V plants in the different power distribution systems.

By respecting these values, the withstand behaviour in case of TOV improves.

SPD	TN-system	TT-system	IT-systems
phase to neutral	Uc ≥ 335 V	Uc ≥ 335 V	Uc ≥ 335 V (1)
phase to earth	Uc ≥ 335 V	$Uc \ge 400 \text{ V}$	Uc ≥ 400 V
neutral to earth	-	Uc 255 V (2)	Uc 255 V (2)

(1) only for systems with distribuited neutral - (2) tested for a TOV of 1200 V for 200 ms

#### Behaviour in case of Temporary Overvoltage TOV (U<sub>T</sub>), in accordance with EN IEC 61643-11:

Application	To	est parameters of the TOV	
SPDs connected to:	For tr = 5 s (LV-system faults in the consumer installation) (requirements in 8.3.9 and test 9.3.9.100)	For tr = 120 min (LV-system - loss of neutral) (requirements in 8.3.9 and test 9.3.9.100)	For tr = 200 ms (HV system faults) (requirements in 8.3.9 and test in 9.3.9.101)
	Withstand* mode required	Withstand* or safe end of life** acceptable	Withstand* or safe end of life** acceptable
	Te	est values of the TOV $U_T$ (V	)
TN Systems			
Connected L-(PE)N o L-N	1,32 x Utest	$\sqrt{3}$ X Utest	-
Connected N-PE	-	-	-
Connected L-L	-	-	-
TT Systems			
Connected L-PE	√3 x Utest	1,32 x Utest	1200 + Utest
Connected L-N	1,32 x Utest	√ 3 x Utest	-
Connected N-PE	-	-	1200
Connected L-L	-	-	-
IT Systems			
Connected L-PE	-	-	1200 + Utest
Connected L-N	1,32 x Utest	√ 3 x Utest	-
Connected N-PE	-	-	1200 + Utest
Connected L-L	-	-	-



- \* Withstand mode (W): the SPD withstands without being damaged! This is the optimal condition.
- \*\* **Safe end of life mode (S):** the SPD is damaged and behaves in a safe way, without burning and maintaining its IP degree. This is the minimum acceptable condition, which involves the loss of the protection.


#### SPD classification and test classes

Surge protective devices are tested in accordance with the classification and parameters provided by the manufacturer. Depending on the intended application, according to HD 60364-5-53 or the EN IEC 62305 series, there are three different types of SPDs:

Type of SPD	IEC 61643-11 (2011)	EN IEC 61643-11 (2025)	SPD icon
SPD for lightning equipotential bonding	test class I	Type 1 / T1 SPD / T1	<b>5</b>
SPDs for protection against transient overvoltages	test class II	Type 2 / T2 SPD / T2	<b>3</b>
SPDs for protection against transient overvoltages and for equipment protection	test class III	Type 3 / T3 SPD / T3	<b>(</b>
SPDs with filter for enhanced equipment protection	IEC 61000-4-5	EN 61000-4-5	4414

- T1 SPD: tested with the impulse discharge current l<sub>imp</sub> (typically 10/350 μs) and with 8/20 μs current impulses;
- T2 SPD: tested with the nominal discharge current I<sub>n</sub> (8/20 µs) and optional with the maximum discharge current I<sub>max</sub> (8/20 µs). *Imax should not be considered for choosing an SPD.* When containing any voltage switching components T1 SPDs and T2 SPDs are additionally tested with 1,2/50 µs voltage impulses;
- T3 SPD: tested with a combination wave (CW) generator providing an open circuit voltage  $U_{oc}$  (1,2/50  $\mu$ s) and a defined short circuit current  $I_{cw}$  (8/20  $\mu$ s) with a fictive nominal output impedance of 2  $\Omega$ .

# Maximum preferred discharge current values for T1, T2 and T3 SPDs in accordance with EN IEC 61643-11

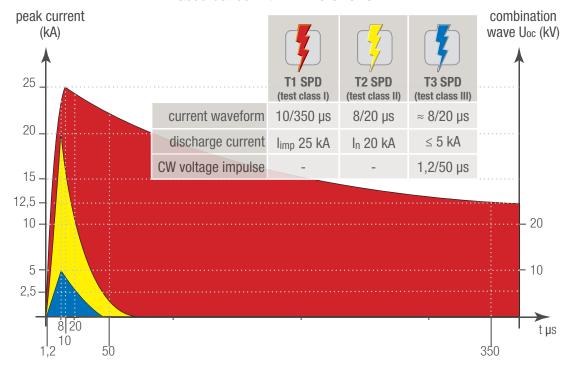



#### Short circuit withstand capability (short circuit current rating Iscer):

During the normal operation of overvoltage protective devices, the SPD provides a high impedance at nominal system voltage and rated frequency. In case an SPD reaches its end-of-life in a low impedance state, the resulting short-circuit current must be interrupted. This interruption may be provided by an SPD internal disconnector or in conjunction with an external disconnector, e.g. a fuse.

When the SPD manufacturer provides information about a maximum allowed backup fuse rating, any alternative overcurrent protective device, like e.g. MCBs or circuit breakers, must be considered very carefully, because such devices may not provide the required impulse withstand, specifically in applications where T1 SPDs are required and partial lightning currents are to be expected.

If overcurrent protective devices other than those recommended by the SPD manufacturer are used, their selection is under the sole responsability of the installer. Furthermore, the higher internal impedance of such altrernative devices compared to a fuse may increase the voltage drop under surge conditions, thereby worsening the effective voltage protection level for the installation and equipment.

#### Follow current interrupt rating Ifi:

This rating only exists in the IEC 61643-11 (2011) and relates to SPD constructions, which generally cause a follow current from the power supply after discharge current flow, and describes the ability of such SPDs to self-extinguish such follow current without operation or alteration of any disconnector. Important for correct understanding is, that this parameter does not provide a real current value that gets interrupted by the SPD, but the maximum prospective short circuit current that may be available at the SPD's point of installation, at which any expected follow current will be self-extinguished by the SPD.

While IEC 61643-11 (2011) allows this follow current interrupt rating  $I_{\rm fi}$  to be lower than the short-circuit current rating  $I_{\rm sccr}$ , EN 61643-11(2012) and IEC / EN IEC 61643-11 (2025) require this rating to be equal to the short-circuit current rating  $I_{\rm sccr}$ . But both installation rules, IEC 60364-5-53 as well as HD 60364-5-53, require that the follow current interrupt rating must be equal or higher than the maximum available short circuit current from the power system at the SPD's point of installation.

#### **NFC No Follow Current®:**

Thanks to their design characteristics, SPDs with **No Follow Current®** technology **(NFC)**, completely avoid the flow of follow currents from the power system at all, and therefore also limit the impulse stress to disconnectors (e.g. fuses) and upstream protective devices in the installation to a minimum. Thus resulting in a lower risk of supply outages.

#### **Voltage Protection level Up:**

This parameter is defined as the maximum instantaneous voltage value at the SPD's terminals during its intended operation under defined impulse stress conditions. Depending on the construction and the type of components used in the SPD this protection level corresponds to:

- for voltage Limiting SPDs: the residual voltage at nominal discharge current (8/20 μs) for type 2 SPDs or the residual voltage at a discharge current (8/20 μs), with a crest value of l<sub>imp</sub> for type 1 SPDs;
- for voltage switching and combination SPDs: the limiting voltage at 1,2/50 µs voltage impulses and the residual voltage as above, whatever is higher, or the limiting voltage at hybrid generator impulses.

The protection level provided by SPDs must be compared to the impulse voltage withstand of the equipment to be protected, also taking into consideration the distances between these SPDs and the equipment.

#### Response time ta:

In EN IEC 61643-11 the response time of SPDs is not directly addressed, but only an implicit factor when testing for the limiting voltage of voltage switching or combination SPDs. However, for semiconductors even very short peaks can be harmfull and therefore the response time of SPDs is not of secondary importance. The phenomena of transient overvoltages in equipment is usually in the order of some ten  $\mu s$ , the response time of voltage limiting SPDs is in the order of some to some ten ns, but the time before damage may occur to some categories of semiconductors is in the order of ps.

This leads to the simple statement: the shorter the SPDs response time is, the better is the overall protection function the SPD provides.



#### **Coordination of SPDs:**

The best effectiveness of SPDs can only be ensured through appropriate coordination of all SPDs with regard to the voltage protection level and the energy absorption. The necessary information to enable such coordination of SPDs can only be provided by the manufacturer, because the specific SPD design and construction may have a significant influence here. The larger an electrical system is, the more difficult and complex it is to achieve proper coordination because of the increasing distances, and therefore increasing conductor length and impedances, between the SPDs and the parts of the installation and the equipment to be protected, which may cause the various SPDs installed to operate independently from each other.


#### Total discharge current (Itotal 10/350 and Itotal 8/20):

This parameter is intended to specify and test for the maximum surge current stress in the terminal and related components of a multipole SPD, which are connected to PE. This is necessary to check for the accumulating effects and stress factors when several or even all modes of protection of an SPD are operated, because most other tests are performed on single modes of protection, but I<sub>total</sub> is particularly important for T1 SPDs as the stresses expected in a lightning equipotential bonding system are common mode, meaning impulse currents flowing simultaneously in all active conductors, as indicated in EN IEC 62305-1 and -4.

#### **Noise level attenuation:**

This is realised by filters for limiting the electromagnetic interferences in the range of  $150 \, \text{kHz} - 30 \, \text{MHz}$ , both in common and line to line mode, which show a specific characteristic to reach that protective behaviour. Such filters are added as an additional feature to advanced SPD designs for providing extensive protection against transients and all kinds of conducted interferences, with the aim of reaching electromagnetic compatibility (EMC) in a wide frequency range.

#### Filter characteristics showing the asymmetric and the symmetric attenuation curve

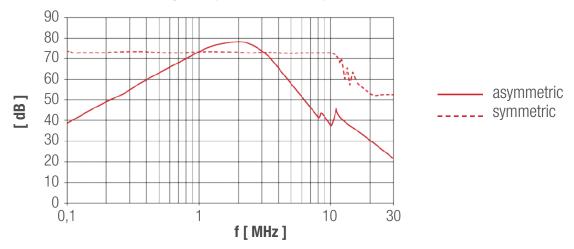

#### **Pollution Degree:**

The basic safety publication EN IEC 60664-1 for insulation coordination for equipment within low voltage systems specifies and classifies four pollution degrees, whereby the micro-environmental conditions of the insulation must be taken into account for construction. Micro environment in this context means the immediate environment of the insulation, as compared to the macro environment, which describes the environment of the room or location where the equipment is installed. The micro environment often depends primarily on the macro environment and they are essentially identical.

Classification of pollution degrees (PDs):

PD 1: No pollution or only dry, non-conductive pollution.

PD 2: Only non-conductive pollution, except an occasionally temporary conductivity caused by condensation.

PD 3: Conductive pollution or dry non-conductive pollution which becomes conductive due to expected condensation.


This design parameter of an SPD should be thoroughly checked to determine its suitability for a specific application. As a general guideline for domestic applications pollution degree 2 applies and for industrial applications pollution degree 3 applies. It may require particular attention in outdoor locations or under severe environmental conditions. e.g. for photovoltaic installations, public lighting and wind farms, industrial environments such as steel mills, cement factories.

# **#**

# **SOURCE OF DAMAGE**

# SELECTION OF SPDs ACCORDING TO THE EXPECTED IMPACT

The standard series IEC and EN IEC 62305 defines lightning flashes to various points as so called sources of damage. Such damage may e.g. be to a structures, to services, to installations or equipment. The installation of SPDs within the electric distribution system can significantly reduce the risk of such damages to services, to installations or equipment. Electromagnetic interferences are also a potential source of damage, the risk of which can be reduced by the installation of SPDs with additional filter.

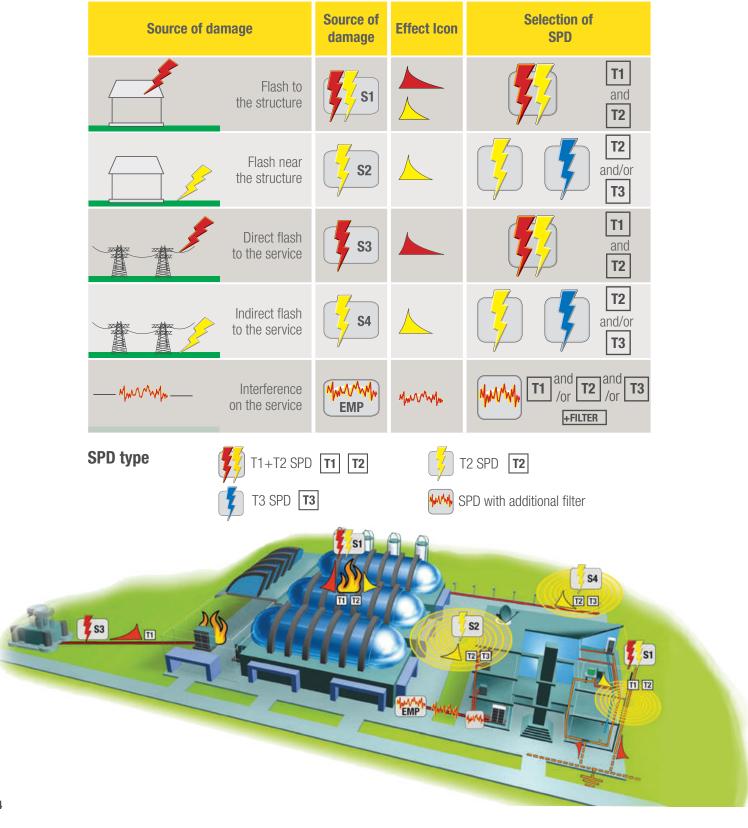



# SELECTION OF SPDs ACCORDING TO THE EXPECTED IMPACT IN ACCORDANCE WITH IEC AND EN IEC 62305-2

#### Lightning flash to the structure - direct flash (source of damage S1):



The lightning current flowing to earth is subdivided directly and via SPDs between the earthing system and all metal structures entering, including any electric services. A representative current waveform is a unipolar  $10/350~\mu s$  impulse (limp). In the event of a direct lightning flash to a structure there will also be induced currents represented by an  $8/20~\mu s$  impulse (ln). Required SPDs are **T1** and **T2**.

#### Lightning flash near the structure - indirect flash (Source of damage S2):



The impulses caused by induction effects from magnetic fields generated by the lighting current are represented by an 8/20  $\mu$ s impulse (I<sub>n</sub>). Required SPDs are **T2** and/or **T3**.

#### **Lightning flash to a service - direct flash (Source of damage S3):**



The lightning current is subdivided to both directions of the service and insulation breakdown needs to be considered. A representative current waveform is a unipolar 10/350 µs impulse (limp). Required SPDs are **T1** and **T2**.

#### Lightning flash close to a service - indirect flash (Source of damage S4):



The impulses caused by induction effects from magnetic fields generated by the lightning current are represented by an 8/20  $\mu$ s impulse (I<sub>n</sub>). Required SPDs are **T2** and/or **T3**.

# SELECTION OF SPDs ACCORDING TO THE EXPECTED IMPACT IN ACCORDANCE WITH HD 60364-4-443

#### Lightning flash to a service - direct flash (Source of damage S3):



The lightning current is subdivided to both directions of the service and insulation breakdown needs to be considered. A representative current waveform is a unipolar  $10/350 \, \mu s$  impulse ( $l_{imp}$ ). Required SPDs are  $\boxed{\textbf{T1}}$  and  $\boxed{\textbf{T2}}$ .

#### Lightning flash close to a service - indirect flash (Source of damage S4):



The impulses caused by induction effects from magnetic fields generated by the lightning current are represented by an 8/20  $\mu$ s impulse (I<sub>n</sub>). Required SPDs are **T2** and/or **T3**.

#### **Electromagnetic interferences conducted by the service:**



Conducted electromagnetic interferences may appear in common mode (all active conductors versus earth) or in differential mode (between active conductors) and are mostly in the range of 150 kHz to 30 MHz.

Such interferences can cause damage to equipment and service outage. It is recommended to apply SPDs with interference filter. The required discharge capability is determined depending on the source of damage to be expected (S2 and S4) and the filter characteristic and mitigation level is determined by the expected interference level.



## LOCATION AND ARRANGEMENT


# SELECTION OF SPDs ACCORDING TO THE LIGHTNING PROTECTION ZONE (LPZ) CONCEPT

SPDs shall be selected and installed in accordance with the requirements of the HD 60364-4-443 and the IEC and EN IEC 62305 series of standards respectively, and the HD 60364-5-53. The primary SPDs shall be located as close as possible to the origin of the installation. In many cases this will be the Main Distribution Board (MDB). Further SPDs will most likely be located in Sub Distribution Boards (SDBs).

Following the philosophy of the lightning protection zone concept right from the planning phase of an installation, it is first necessary to define and separate into areas (so called zones) within a structure, which require a certain level of protection, depending on the resistivity and immunity of the equipment installed and used there. The higher the protection requirements are, the higher is the corresponding Zone number.

Based on that the progressive attenuation of transients and electromagnetic inteferences is achieved through the installation of coordinated SPDs at the boundaries of the zones defined.

The objective is to reach a fully compatible system, where all electric and electronic equipment is sufficiently protected not to face any transients or interference it is not able to withstand. By doing this service continuity and the integrity of equipment should be guaranteed.

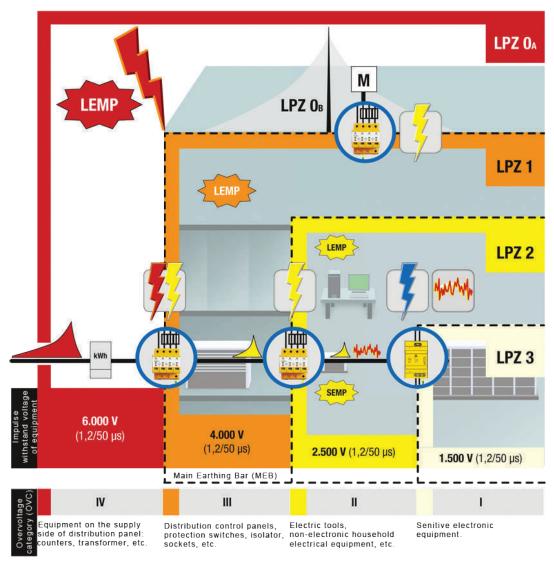

Classification of LPZs:

LPZ O<sub>A</sub> Zone where the threat is due to the direct lightning flash and the full lightning electromagnetic field. The internal system may be subjected to full or partial lightning surge current;

LPZ OB Zone protected against direct lightning flashes but where the threat is the full lightning electromagnetic field. The internal system may be subjected to partial lightning surge current;

LPZ 1 Zone where the surge current is limited by current sharing and by isolating interfaces and/or SPDs at the boundary. Spatial shielding may attenuate the lightning electromagnetic field;

LPZ 2, ..., n Zone where the surge current may be further limited by current sharing and by isolating interfaces and/or additional SPDs at the boundary. Additional spatial shielding may be used to further attenuate the lightning electromagnetic field.



## LIGHTNING THREAT PARAMETERS

# LIGHTNING PROTECTION LEVELS (LPLs) AND SPD DISCHARGE CAPABILITY

The Standard series EN IEC 62305 classifies a set of four Lightning Protection Levels with decreasing efficiency. The table below briefly outlines the details and threat parameters for these levels.

Lightning protection level LPL	Total efficiency	Capture efficiency	Dimensioning efficiency	Values of protection parameters chosen for LPS dimensioning					
				max	min	∆i/∆t	Qtot	Qimp	Esp
				(kA)	(kA)	(kA/µs)	(C)	(C)	$(kJ/\Omega)$
	98%	99%	99%	200	3	200	300	100	10.000
	95%	97%	98%	150	5	150	225	75	5.600
III	90%	95%	95%	100	7	100	150	50	2.500
IV	80%	85%	95%	100	16	100	150	50	2.500

#### Discharge capability requirements according to IEC and EN IEC 62305

In order to choose the correct value for the SPD discharge capability, it is necessary to determine the expected impulse current at the SPDs point of installation. This value depends on the strike point of the lightning flash and on the current sharing and distribution within the structure and the electric system and wiring.

The EN IEC 62305 series of standards provides the information necessary to calculate these parameters for source of damage S1. For sources of damage S2, S3 and S4, the standard provides the values to be applied. The standard also provides appropriate information for telecommunication systems, because discharge parameters are an important factor there as well.

According to EN IEC 62305-2 (Risk Analysis) the SPDs discharge capability is quite important and provides an indication for the overall protection level of the SPD system installed (see table beside).

In some cases, the standard recommends the choice of SPDs with very high capabilities in order to reduce the risk of explosion (increase of  $l_{imp}$ ,  $l_n$  capabilities corresponding to LPL I requirements).

Choosing SPDs with a high discharge capability ( $l_{imp}$ ) is important, but it should be considered that other SPD parameters, like the protection level ( $U_p$ ), must be superior too then.

LPL + SPD Rating	P <sub>SPD 1)</sub>
none / no coordinated SPD	1
III-IV + SPD with $I_n/I_{imp}$	0,05
II + SPD with In/Iimp	0,02
I + SPD with In/limp	0,01
I + SPD with 1,5 x In /Iimp	0,005
I + SPD with 2 x In /limp	0,002
I + SPD with 3 x In /limp	0,001
AV according to 1996 and a contract of the	

1) probability that an overvoltage damages an apparatus protected by an SPD system, expressed in %

#### Discharge capability requirements according to HD 60364-5-53

The standard HD 60364-5-53 provides some minimum requirements regarding the discharge capability of SPDs in case of indirect lightning, but also in case of direct lightning when there is not sufficient data available to calculate the parameters based on IEC and EN IEC 62305-2. Depending on the mode of protection, these minimum requirements are:

- For indirect lightning a nominal discharge current  $I_n \ge 5$  kA 8/20  $\mu$ s, and, when connection type CT2 is applied (3+1 or 1+1 connection), a nominal discharge current  $I_n \ge 20$  kA 8/20  $\mu$ s for the SPD mode connected N to PE in three-phase systems, and 10 kA 8/20  $\mu$ s in single-phase systems. Nevertheless we recommend to use SPDs with a nominal discharge current of at least 10 kA 8/20  $\mu$ s.
- For direct lightning an impulse current  $l_{imp} \ge 12,5$  kA 10/350  $\mu$ s for LPL III and IV, and, when connection type CT2 is applied (3+1 or 1+1 connection), an impulse current  $l_{imp} \ge 50$  kA 10/350  $\mu$ s for the SPD mode connected N to PE in three-phase systems, and 25 kA 10/350  $\mu$ s in single-phase systems.




## POWER DISTRIBUTION SYSTEMS

# INSTALLATION OF SPDs IN TN-, TT-, AND IT-SYSTEMS ACCORDING TO HD 60364-5-53

The installation of SPDs in a specific power distribution system must be coordinated with the protective measures against indirect contact (fault protection) and with the corresponding protective devices and their capability to withstand impulse currents.


This coordination depends on the type and earthing arrangement of the power system, as there are TN-, TT- and IT-systems according to HD 60364-1 and the corresponding protective devices may be:

- overcurrent protective devices;
- residual current protective devices;
- insulation monitoring devices.




Installation of SPDs in a TN-C-system

Connection type CT1 (3+0 connection)



Installation of SPDs in a TN-S-system

Connection type CT1 (4+0 connection)




Installation of SPDs in a TT-system upstream the main residual current device

Connection type CT2 (3+1 connection)




- 1: OCPD 1 OverCurrent Protective Device at the origin of the installation (e.g. in the main distribution board)
- 2: Main Distribution Board (MDB)
- 3: Main Earthing Terminal
- 4: Surge Protective Device(s) (SPDs)
- 4a: Surge Protective Device connected N to PE (N-PE SPD) when connection type CT2 (3+1 connection) is applied
- 5a/5b: Alternative connections to PE (preferably the shortest route, or even both connections as required in some countries)
- 6: Equipment to be protected
- 7: Residual Current Device (RCD) (in most cases this will be a RCCB or a RCBO)
- 7a: Selective Residual Current Device (e.g. type S RCD)
- F: OCPD 2 OverCurrent Protective Device required by the SPD manufacturer
- RA: Earthing resistance of the (consumers) installation
- RB: Earthing resistance of the power supply system




# Installation of SPDs in a TT-system downstream the main residual current device

Connection type CT1 (4+0 connection)



#### Installation of SPDs in an IT-system without distributed neutral

Connection type CT1 (3+0 connection)



Installation of SPDs in an IT-system with distributed neutral

Connection type CT2 (3+1 connection)



## SELECTION OF ZOTUP SPDs

## **ICONS FOR A QUICK SPD SELECTION**



Protection against direct and indirect lightning effects (combined T1 and T2 SPD)



Protection against indirect lightning effects (T2 SPD)




Protection against induced overvoltages (T3 SPD)



Protection against electro-magnetic interferences on the line including transient surge suppression

#### ORDERING CODE EXAMPLE FOR LOW VOLTAGE SPDS:

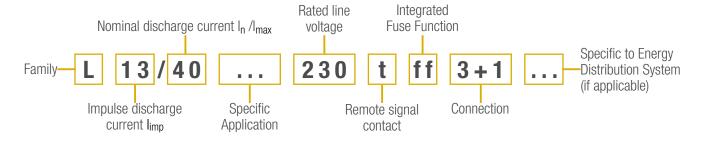

#### **ZOTUP SPD TAXONOMY**

#### L - ZOTUPLIMITER

#### Varistor based SPDs:

- NFC No Follow Current®
- very short response time (t<sub>a</sub>): ≤ 25 ns;
- very good voltage protection level even at certain impulse overcurrent;
- high impulse current rating: (l<sub>imp</sub>) up to 25 kA/pole, 10/350 μs; (l<sub>max</sub>) up to 100 kA/pole 8/20 μs.

The wide range of **limiting SPDs** with **NFC No Follow Current**® technology allows optimum protection in most applications, also in large installations, where SPDs often operate independent from each other, and where reliable protection and high performance are required.



#### IL - ZOTUPCOMB

Combined Voltage Limiting and Switching SPD with varistor and GDT connected in series:

- NFC No Follow Current® as a result of the combination;
- short response time (t<sub>a</sub>): ≤ 100 ns;
- good voltage protection level;
- no leakage currents.

**Combined SPDs** make use of GDT and varistor elements, with voltage switching and with voltage limiting function. In our production range, these SPDs have been optimized for those applications where no really high discharge capability is required, as for example residential applications.

#### IA - I - G - ZOTUPGAP

- Type IA Voltage Switching Spark gap based SPDs with trigger technology:
  - high impulse current rating: (limp) 25 kA/pole 10/350 μs; 100 kA/4 poles 10/350 μs);
  - short response time (t<sub>a</sub>): ≤ 100 ns;
  - good voltage protection level;
  - no leakage currents.

**SPDs with spark gap** and trigger technology are intended for primary protection applications where the prospective short circuit current of the power distribution system at the installation point of the SPDs is lower than or equal to  $I_{\rm fl}$  and for installations where coordinated SPDs with very short response time are provided for secondary protection. A typical application is e.g. in a TT system of a medium plant size comprising a main distribution board feeding first and second level subdistribution boards.

- Type I Voltage Switching GDT based SPDs:
  - the typical application for this device is in the N-PE mode of protection in TT distribution systems (1+1 or 3 + 1 construction, connection type CT 2 according to HD 60364-5-53);
  - high impulse current rating (l<sub>imp</sub>) and (l<sub>max</sub>) up to 100 kA, 10/350 μs.

#### **ILF - ZOTUPFILTER**

Combined Voltage Limiting and Switching SPD plus Filter with varistor and GDT comprising an additional filter:

- effective noise level attenuation by use of additional high frequency bandpass filters;
- high level interference protection for sensitive equipment with limited resistivity and immunity characteristics;
- high discharge capabilty (combination wave test at  $U_{oc}$  10 kV 1,2/50  $\mu$ s,  $I_{cw}$  5 kA 8/20  $\mu$ s).

**Combined SPDs with additional filter** are used where high continuity of service is required like data centers, DCS (distributed control systems), etc.. These SPDs do not only protect against transients due to lightning, but also against high frequency conducted interferences. They are applied where Electromagnetic Compatibility (EMC) is an issue and requires improvement of the system immunity.

#### **ZOTUPBOX**

**Protection boxes with an IP65 enclosure** which provide a compact and preinstalled solution for applications in Power Centers.



#### **ZOTUPACCESSORIES**

**CPs are fork-type busbars with 2 up to 8 connection points.** Typical application: to provide a common PE connection for several SPDs.

#### LLP - ZOTUPLED

#### **SPD LED Lighting Protection Systems**

A ready to install assembly of a voltage limiting and a voltage switching SPD providing two modes of protection.

#### S - ZOTUPSIGNAL

#### SPDs for Signalling, telecommunication and data transmission.

These SPDs are connected in series with low resistivity electronic equipments, like analog interfaces and data networks.

#### C - ZOTUPCOAX

Specific SPDs with coaxial connectors for protecting TV switchboards, satellite antenna or wideband transmission equipment and remote systems.

Particularly suitable for applications with long coaxial cables which are exposed to electromagnetic interference.

#### HV - ZOTUPHV

Surge Arresters for high voltage systems (HV) with typical applications: protection of transformers, switchgears and transmission lines in HV systems.

- Surge Arresters with silicone rubber housing providing big internal and external creepage distances suitable for all applications with high level of pollution.
- Surge Arresters available with disconnector device, which is activated by and increase in internal preassure with a reliable operating mechanism and stable characteristic even over long time.
- Additional lightning strike counters and lightning strike counters with measurement for indication of the total leakage current (internal and external dispersion) are also available.
- Surge Arresters with a higher thermal energy rating than 4,5 kJ/kV are available upon request.

# **#**

#### **ZOTUP SPD FAMILIES**

#### **ZOTUP SPDs FOR LOW VOLTAGE SYSTEMS**

#### SPDs FOR LOW VOLTAGE ALTERNATING CURRENT (AC) APPLICATIONS

• L ... – ZOTUPLIMITER

• IA ... – ZOTUPGAP (SPARK GAPS WITH TRIGGER TECHNOLOGY)

• I ... – ZOTUPGAP (SPARK GAPS N-PE)

• IL ... – ZOTUPCOMB

• PB ... − ZOTUPBOX

CP ... – ZOTUPACCESSORIES

#### SPDs FOR ALTERNATING CURRENT (AC) WITH ADDITIONAL FILTER

• ILF ... – ZOTUPFILTER

#### **SPDs FOR PHOTOVOLTAIC APPLICATIONS**

L 13/60 PV Y ... ff
 L 3/40 PV Y ... ff
 ZOTUPLIMITER PV
 ZOTUPLIMITER PV

#### SPDs FOR DIRECT CURRENT (DC)

• L 7/30 DC ... ff – ZOTUPLIMITER DC

#### SPDs FOR LED LIGHTING

LLP ... – ZOTUPLED
 IL 1/10 2P LED – ZOTUPCOMB

#### ZOTUP SPDs FOR SIGNALLING, TELECOMMUNICATION AND DATA TRANSMISSION

#### **SPDs FOR SIGNALLING AND TELECOMMUNICATION NETWORKS**

S (S-ASI L/R; S-AS2; S-N) – ZOTUPSIGNAL
 C ... – ZOTUPCOAX

#### SPDs FOR DATA TRANSMISSION

• S (S-ASI B/G; S-F; S ADSL) – ZOTUPSIGNAL

# ZOTUP SURGE ARRESTERS FOR HIGH VOLTAGE SYSTEMS (HV) IN CA, CC AND SURGES COUNTER

#### **SURGE ARRESTERS FOR HIGH VOLTAGE SYSTEMS**

HV ...
 HV ...
 HV ...
 ZOTUPHV SC
 HV ...

# #

## THE WEBAPP

Choosing the right SPD is essential as well as demanding: there are many parameters to take into account. On the occasion of the latest publication of the new standards **HD 60364-4-443** and **HD 60364-5-53 chapter 534**, ZOTUP presents the new WEBAPP, a new digital tool totally free of charge and designed to help the user choosing the right SPD.

#### **HOW TO INSTALL IT**

Totally free of charge, by clicking this link: **webapp.zotup.it**. It is required to register only when accessing the first time.

#### **HOW IT WORKS**

Easy multiple-choice questions will guide the user to select the right SPD.

#### **RESULTS**


The most suitable SPD for the protection needs will be identified together with all the technical info. Moreover, there is also the possibility of saving search results and/or downloading them.

#### **ONGOING SUPPORT**

The ZOTUP team is available for an ongoing support when using the app and for choosing the right SPD.

# Design your plant for free with ZOTUP WEBAPP. Install it on your smartphone or on your pc desktop.



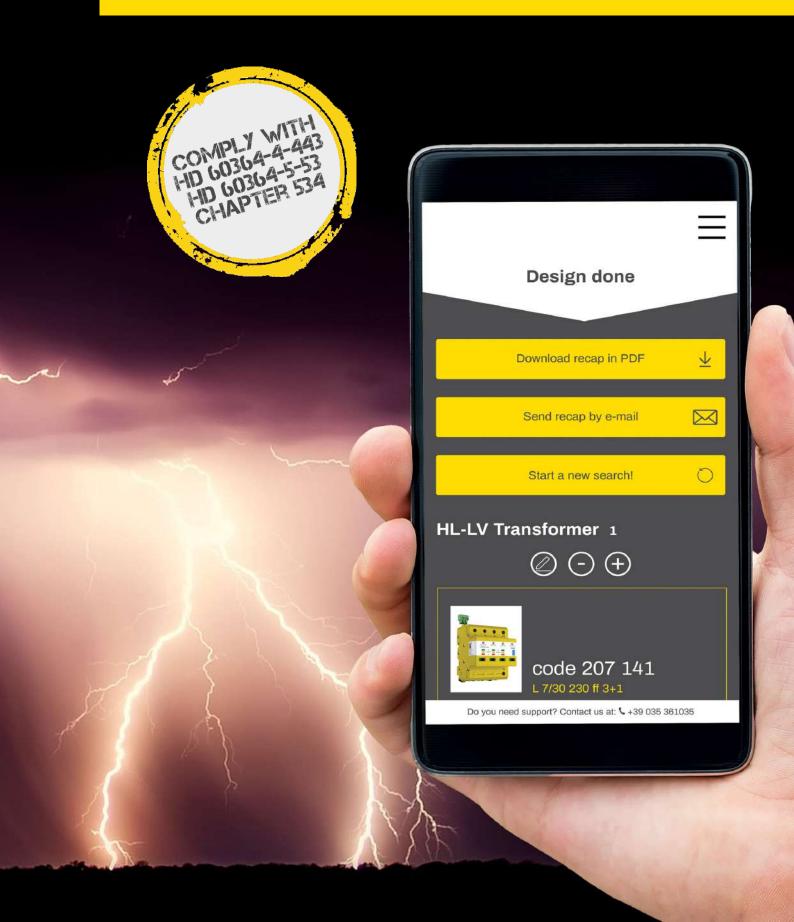





THE INNOVATIVE FEATURES
OF OUR NEW PRODUCTS



## NEW ZOTUP PRODUCTS

#### **MAIN FEATURES**

**ZOTUP** brings to the market a new technology after 4,5 years of intensive research and development activities. These new products are supported by more than 330 laboratory tests and the technology behind is protected by four international patents. Herewith **ZOTUP** is standing for new state of the art surge protection for low voltage power systems. **ZOTUP** products represent an outstanding innovation on the market of surge protection with regard to performance, safety, easiness of installation and reliability. All these quality attributes are now available in a single product.

The unique technical features putting our products to the top are:





#### Fuse Function (ff)

in case the SPD reaches its end of life in a short circuit state. According to the product standard EN IEC 61643-11 SPDs are classified according to their behavior when reaching end of life. There are two end o life modes:

- OCM (Open-Circuit Mode);
- SCM (Short-Circuit Mode).

An SPD with OCM must disconnect from the power supply when reaching end of life. The disconnection operation can be performed by an internal or an external disconnector, or by a combination of these two.

The standard differentiates between two distinct processes:


- a "slow" process that depends on the degradation of voltage limiting components, e.g. in MOV-based SPDs, leading to thermal runaway. In such case the disconnection is generally ensured by an internal thermal operated disconnector.
- b) a "quick" or even "instant" process that depends on the overcurrent caused by a very low remaining impedance of the SPD, which causes a short circuit on the supply. The interruption of such short-circuit current is managed by an internal or external disconnector with appropriate breaking capability, preferrably a fuse.
- The innovative feature from **ZOTUP** is a patented combined internal disconnector, which is able to disconnect in both of the above mentioned cases, the "slow" and the "quick" or "instant" process. This means that the disconnector used in **ZOTUP** products provides an Integrated Fuse Function (ff). Therefore, as long as certain short circuit current values are not exceeded, our products do not require any additional external disconnector.

#### **Advantages:**

- Maintaining the full discharge capability of the SPD. An external fuse or disconnector may influence/limit this capability;
- The overall voltage drop across the SPD branch circuit and therefore
  the effective voltage protection level for the installation and equipment
  is kept to a minimum, as there are no additional devices and the wiring
  can be kept very short;
- No additional costs for external disconnectors, less time for cabling and a smaller ecologic footprint.

If the short circuit current at the point of installation exceeds the breaking capability of that internal disconnector an additional external fuse is required. In such case the fuse is intrinsically selective with the internal disconnector, safeguarding the integrity of the SPD in case of a very low impedance or even short circuit state.








#### • Progressive performance indication

The new design of ZOTUP makes regular checks of the SPDs status and system verification very easy. Periodic verification is generally required by regulations on national level. The new **ZOTUP** SPD range displays its performance status by a change of color in the Status Indicator window. The transition from the initial green color (full performance) to the totally yellow (minimum performance) is **progressive/analog**. The colour in the window indicates the actual remaining performance of the SPD, thus providing comprehensive information rather than a simple good versus out of order message for attention.

After that a red indication follows, showing the SPD has reached its end of life.

#### **Advantages:**

- **Progressive indication** of the reduction in performance of the SPD allows preventive maintenance and optimization of replacement decisions;
- **Remote indication** for SPDs incorporating a changeover contact is activated when the performance reaches its minimum state (totally yellow). Therefore the remote alarm is preventive, because the SPD is still operational and still able to protect at minimum performance level.





#### For applications with high pollution (PD 3) and for extended temperature range (-40°/+80°C)

The increasing application of SPDs under "heavy" environmental conditions (such as traffic light controls, cellular radio and mobile phone stations, outdoor public lighting and street lighting systems) has highlighted the need for more stringent requirements on resistivity to pollution.

Installation of SPDs in costal areas with a high rate of salinity and/or in locations with increased condensation effects due to rapid changes in temperature, e.g. in photovoltaic (PV) installations and power plants or in Wind Turbines, has shown that increased distances are necessary to sufficiently prevent from electric tracking on insulating materials on a long term view.

**ZOTUP** deals with the issue of pollution and uses firm materials and applies adequate design features to achieve Pollution Degree 3 for all internal and external creepage distances and clearances.

Keeping an emphasis on environmental aspects our products are designed and classified for the highest level of temperature range, which goes even beyond the so called extended range in the product standard.

#### **Advantages:**

- Improved reliability when installed in "heavy" environments;
- Enabling applications that cannot be covered with a lower pollution degree or normal temperature range.





# SPDs FOR LOW VOLTAGE ALTERNATING CURRENT (AC) APPLICATIONS

			III (AC	_		
Model	Application lcon	Type	Modes of protection	Impulse discharge current l <sub>imp</sub>	Nominal discharge current l <sub>n</sub>	Page
L 50/100 230 t ff 1+1		T1 and T2	3	50 kA	60 kA	36
L 50/100 230 t ff 3+1		T1 and T2	10	50 kA	60 kA	37
L 25/100 230 t ff		T1 and T2	1	25 kA	60 kA	38
L 25/100 230 t ff 2		T1 and T2	3	25 kA	60 kA	39
L 25/100 230 t ff 3		T1 and T2	6	25 kA	60 kA	40
L 25/100 230 t ff 4		T1 and T2	10	25 kA	60 kA	41
L 25/100 230 t ff 1+1		T1 and T2	3	25 kA	60 kA	42
L 25/100 230 t ff 3+1		T1 and T2	10	25 kA	60 kA	43
IA 25 230		T1 and T2	1	25 kA	25 kA	44
IA 25 230 2		T1 and T2	3	25 kA	25 kA	45
IA 25 230 4		T1 and T2	10	25 kA	25 kA	46
IA 25 230 1+1	<b>\$</b>	T1 and T2	3	25 kA	25 kA	47
IA 25 230 3+1		T1 and T2	10	25 kA	25 kA	48
I 100 N-PE		T1 and T2	1	100 kA	100 kA	49
L 13/40 230 t ff		T1 and T2	1	13 kA	35 kA	50
L 13/40 230 t ff 2		T1 and T2	3	13 kA	35 kA	51
L 13/40 230 t ff 3	<b>5</b>	T1 and T2	6	13 kA	35 kA	52
L 13/40 230 t ff 4		T1 and T2	10	13 kA	35 kA	53
L 13/40 230 t ff 1+1	<b>\$</b>	T1 and T2	3	13 kA	35 kA	54
	L 50/100 230 t ff 1+1  L 50/100 230 t ff 3+1  L 25/100 230 t ff 2  L 25/100 230 t ff 3  L 25/100 230 t ff 4  L 25/100 230 t ff 4  L 25/100 230 t ff 3+1  IA 25 230  IA 25 230 2  IA 25 230 4  IA 25 230 1+1  IA 25 230 3+1  I 100 N-PE  L 13/40 230 t ff 2  L 13/40 230 t ff 3  L 13/40 230 t ff 3	L 50/100 230 t ff 1+1  L 50/100 230 t ff 3+1  L 25/100 230 t ff 2  L 25/100 230 t ff 3  L 25/100 230 t ff 3  L 25/100 230 t ff 4  L 25/100 230 t ff 4  L 25/100 230 t ff 3+1  IA 25 230  IA 25 230 2  IA 25 230 4  IA 25 230 4  IA 25 230 1+1  IA 25 230 3+1  I 100 N-PE  L 13/40 230 t ff 2  L 13/40 230 t ff 3  L 13/40 230 t ff 4	Model       Application Icon       Type         L 50/100 230 t ff 1+1       Image: Control of the process of the proc	Model         Application Incomposition         Type         Modes of protection           L 50/100 230 tff 1+1         Image: Control of the protection of protection         T1 and T2         3           L 50/100 230 tff 3+1         Image: Control of the protection of protection         T1 and T2         10           L 25/100 230 tff 2         Image: Control of the protection of protection         T1 and T2         1           L 25/100 230 tff 3         Image: Control of the protection of protection         T1 and T2         3           L 25/100 230 tff 4         Image: Control of the protection of protection         T1 and T2         10           L 25/100 230 tff 3+1         Image: Control of the protection of the protection         T1 and T2         10           L 25/100 230 tff 3+1         Image: Control of the protection of the protec	Model         Application Implication         Type         Modes of protection         Impulse discharge current I <sub>imp</sub> L 50/100 230 tff 1+1         T1 and T2         3         50 kA           L 50/100 230 tff 3+1         T1 and T2         10         50 kA           L 25/100 230 tff 2         T1 and T2         1         25 kA           L 25/100 230 tff 3         T1 and T2         3         25 kA           L 25/100 230 tff 4         T1 and T2         10         25 kA           L 25/100 230 tff 1+1         T1 and T2         10         25 kA           L 25/100 230 tff 3+1         T1 and T2         10         25 kA           L 25/100 230 tff 3+1         T1 and T2         1         25 kA           L 25/100 230 tff 3+1         T1 and T2         1         25 kA           L 25/230 2         T1 and T2         1         25 kA           L A 25 230 4         T1 and T2         1         25 kA           L A 25 230 4         T1 and T2         1         25 kA           L A 25 230 3+1         T1 and T2         1         100 kA           L 13/40 230 tff         T1 and T2         1         13 kA           L 13/40 230 tff         T1 and T2         3         13 kA      <	Model         Application Icon         Type         Modes of protection         Impulse discharge current I <sub>mp</sub> Nominal discharge current I <sub>m</sub> L 50/100 230 tff 1+1         Image: Current I <sub>mp</sub> T1 and T2         3         50 kA         60 kA           L 50/100 230 tff 3+1         Image: Current I <sub>mp</sub> T1 and T2         10         50 kA         60 kA           L 25/100 230 tff 2         Image: Current I <sub>mp</sub> T1 and T2         1         25 kA         60 kA           L 25/100 230 tff 3         Image: Current I <sub>mp</sub> T1 and T2         1         25 kA         60 kA           L 25/100 230 tff 3         Image: Current I <sub>mp</sub> T1 and T2         1         25 kA         60 kA           L 25/100 230 tff 4         Image: Current I <sub>mp</sub> T1 and T2         1         25 kA         60 kA           L 25/100 230 tff 1+1         Image: Current I <sub>mp</sub> T1 and T2         1         25 kA         60 kA           L 25/100 230 tff 3+1         Image: Current I <sub>mp</sub> T1 and T2         1         25 kA         60 kA           L 25/100 230 tff 3+1         Image: Current I <sub>mp</sub> T1 and T2         1         25 kA         25 kA           L 25/100 230 tff 3+1         Image: Current I <sub>mp</sub> T1 and T2         1



SPD	Model	Application Icon	Туре	Modes of protection	Impulse discharge current l <sub>imp</sub>	Nominal discharge current I <sub>n</sub>	Page
1111	L 13/40 230 t ff 3+1		T1 and T2	10	13 kA	35 kA	55
12 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	I 52 N-PE		T1 and T2	1	52 kA	52 kA	56
and a	Prot. Box TN 40 ff		T1 and T2	10	10 kA	40 kA	57
anac	Prot. Box TT 40 ff		T1 and T2	10	10 kA	40 kA	57
	L 7/30 230 t ff		T1 and T2	1	8 kA	30 kA	58
1 10 10 10 10 10 10 10 10 10 10 10 10 10	L 7/30 400 t ff		T1 and T2	1	7 kA	30 kA	58
The state of the s	L 7/30 600 t ff		T1 and T2	1	5 kA	25 kA	58
10 10 10 10 10 10 10 10 10 10 10 10 10 1	L 7/30 750 t ff	<b>\$</b>	T1 and T2	1	5 kA	20 kA	58
The state of the s	L 7/30 1000 t ff		T1 and T2	1	2 kA	20 kA	58
	L 7/30 230 t ff 2		T1 and T2	3	8 kA	30 kA	59
M 221	L 7/30 230 t ff 3		T1 and T2	6	8 kA	30 kA	60
H 201	L 7/30 400 t ff 3		T1 and T2	6	7 kA	30 kA	60
M 211	L 7/30 750 t ff 3		T1 and T2	6	5 kA	20 kA	60
	L 7/30 230 t ff 4		T1 and T2	10	8 kA	30 kA	61
	L 7/30 230 t ff 1+1		T1 and T2	3	8 kA	30 kA	62
	L 7/30 230 t ff 3+1		T1 and T2	10	8 kA	30 kA	63
	L 3/30 60 t ff		T2	1	-	20 kA	64
	L 3/30 120 t ff	<b>5</b>	T2	1	-	20 kA	64
Marie and the second se	L 3/30 230 t ff	<b>5</b>	T2	1	-	30 kA	64



SPD	Model	Application Icon	Туре	Modes of protection	Impulse discharge current l <sub>imp</sub>	Nominal discharge current I <sub>n</sub>	Page
1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 -	L 3/30 400 t ff	<b>5</b>	T2	1	-	30 kA	64
	L 3/30 230 t ff 2	<b>5</b>	T2	3	-	30 kA	65
	L 3/30 230 t ff 3	<b>5</b>	T2	6	-	30 kA	66
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	L 3/30 230 t ff 4	5	T2	10	-	30 kA	67
	L 3/30 230 t ff 1+1	<b>5</b>	T2	3	-	30 kA	68
	L 3/30 230 t ff 3+1	<b>5</b>	T2	10	-	30 kA	69
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	L 2/10 230 t ff	<b>5</b>	T2	1	-	10 kA	70
	L 2/10 230 t ff 2	<b>4</b>	T2	3	-	10 kA	71
72222	L 2/10 230 t ff 4	<b>5</b>	T2	10	-	10 kA	72
	L 2/10 230 t ff 1+1	5	T2	3	-	10 kA	73
	L 2/10 230 t ff 3+1	<b>5</b>	T2	10	-	10 kA	74
	L 2/10 230 t ff 2 TT	<b>5</b>	T2	3	-	10 kA	75
	L 2/10 230 t ff 4 TT	<b>5</b>	T2	10	-	10 kA	76
	I 12 N-PE		T1 and T2	1	12,5 kA	40 kA	77
	IL 4/20 400 t ff 2 IT		T1 and T2	3	5 kA	20 kA	78
	IL 4/20 400 t ff 3 IT		T1 and T2	6	10 kA	20 kA	79
	IL 4/20 690 t ff 2 IT	<b>\$</b>	T1 and T2	3	2 kA	20 kA	80
	IL 4/20 690 t ff 3 IT		T1 and T2	6	4 kA	20 kA	81
1 1 1 1 1	IL 4/20 830 t ff 2 IT	<b>\$</b>	T1 and T2	3	4 kA	20 kA	82



SPD	Model	Application Icon	Туре	Modes of protection	Impulse discharge current l <sub>imp</sub>	Nominal discharge current l <sub>n</sub>	Page
	IL 4/20 830 t ff 3 IT		T1 and T2	6	4 kA	20 kA	83

# FOR BASIC AC APPLICATIONS

SPD	Model	Application Icon	Туре	Modes of protection	Impulse discharge current l <sub>imp</sub>	Nominal discharge current l <sub>n</sub>	Page
	L 2/20 230 e		T2	1	-	20 kA	85
S. T. A. A. B.	L 2/20 230 t 1+1		T2	3	-	20 kA	86
i ccc	L 2/20 230 t 3+1	<b>4</b>	T2	10	-	20 kA	87
2000 50 00 00 00 00 00 00 00 00 00 00 00	IL 1/3 2P	<b>\$</b>	ТЗ	3	-	-	84
Construction Const	IL 1/10 2P M	<b>5</b>	T2	3	-	10 kA	84

## FOR WIND TURBINE APPLICATIONS IN AC

SPD	Model	Application Icon	Туре	Modes of protection	Impulse discharge current l <sub>imp</sub>	Nominal discharge current l <sub>n</sub>	Page
	L 7/30 600 t ff		T1 and T2	1	5 kA	25 kA	58
	L 7/30 750 t ff		T1 and T2	1	5 kA	20 kA	58
10 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	L 7/30 400 t ff 3		T1 and T2	6	7 kA	30 kA	60
	L 7/30 750 t ff 3		T1 and T2	6	5 kA	20 kA	60



# **ACCESSORIES**

SPD	Model	Application Icon	Туре	Modes of protection	Impulse discharge current l <sub>imp</sub>	Nominal discharge current l <sub>n</sub>	Page
	CP 1	-	-	-	-	-	88
nn	CP 2	-	-	-	-	-	88
nnn	CP 3	-	-	-	-	-	88
nnnn	CP 4	-	-	-	-	-	88
nnnnn	CP 5	-	-	-	-	-	88
nnhhhh	CP 6	-	-	-	-	-	88
nnnnnn	CP 7	-	-	-	-	-	88
nnnhhinn	CP 8	-	-	-	-	-	88




























L 50/100 230 t ff 1+1 is a ready to install assembly of a voltage limiting and a voltage switching SPD providing three modes of protection, typically installed in single-phase 230 V TT systems, where connection type CT2 (1+1) is required, and in TN systems according to HD 60364-53, with the following features and benefits:

- T1 SPD and T2 SPD (Type 1 and Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)
- Backup protection is not required with an upstream CB ≤ 160 A or up to an Isccr ≤ 5 kA rms;
- Three colour Status Indicator with progressive indication of remaining performance.
- Remote signal contact for indication of reduced performance

CODE         218 121           Nominal ac system voltage         UN         230 V ac           Modes of protection         3           Max Continuous Operating Voltage (L-N)         Uc         335 V ac           Max Continuous Operating Voltage (N-PE)         Uc         255 V ac	
Modes of protection3Max Continuous Operating Voltage (L-N)Uc335 V ac	
Max Continuous Operating Voltage (L-N) Uc 335 V ac	
Max Continuous Operating Voltage (N-PE) Uc 255 V ac	
Test Class according to IEC 61643-11 Ed.1 (2011-03)	
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)  T1 and T2	
Impulse discharge current (10/350 µs) (L-N) limp 50 kA	
Impulse discharge current (10/350 µs) (N-PE)	
Charge (L-N) Q 25 As	
Charge (N-PE) Q 50 As	
Nominal discharge current (8/20 µs) (L-N) In 60 kA	
Nominal discharge current (8/20 µs) (N-PE)	
Max. discharge current (8/20 µs) (L-N) Imax 100 kA	
Max. discharge current (8/20 µs) (N-PE) I <sub>max</sub> 150 kA	
Voltage protection level (L-N, L-PE) at a discharge current of: 1 kA $U_p$ $\leq 0.75$ kV $\leq 1,50$ kV	
$5 \text{ kA}  \text{U}_{\text{D}} \qquad \leq 0.85 \text{ kV} \qquad \leq 1,50 \text{ k}$	
13 kA U <sub>P</sub> ≤ 1,10 kV ≤ 1,50 kV	
$25 \text{ kA}  \text{U}_{\text{p}} \qquad \qquad \leq 1,25 \text{ kV} \qquad \qquad \leq 1,50 \text{ kV}$	
$60 \text{ kA}  U_D \qquad \qquad \leq 1,70 \text{ kV} \qquad \qquad \leq 1,70 \text{ kV}$	
Voltage protection level (N-PE) $U_{\rm p}$ $\leq$ 1,50 kV	
Response time (L-N / N-PE) $ ag{5}$ $ ag{5}$ $ ag{5}$ $ ag{5}$ $ ag{5}$ $ ag{6}$ $ ag{5}$ $ ag{6}$ $ ag{7}$ $ ag{5}$ $ ag{6}$ $ ag{7}$ $ ag{6}$ $ ag{7}$	
End of Life (L-N)  OCM (Open Circuit Failure Mode)	
Behaviour in case of Temporary Overvoltage (TOV):  L-N UT  440 V / 120 min, withstand (W)	
N-PE UT 1200 V / 200 ms, withstand (W)	
Short Circuit Current rating without backup protection (internal disconnector) Iscor 5 kA rms	
Short Circuit Current rating with max. backup protection fuse Isccr 25 kA rms	
Max. back-up protection with up-stream CB having a max. let-through energy of 160 A (max. 4,50 x 10 <sup>5</sup> A <sup>2</sup> s)	
(max. prospective short circuit current depends on the CB breaking capability).	
Max. back-up protection with FUSE at prospective short circuit currents of $400 \text{ A gG}$ (> 5 ÷ 25 kA rms) / 250 A gG (>5 ÷ 50 kA	rms
160/125/100 A gG* (> 5 ÷ 100 kA rms)	
Max. overcurrent protection for through-wiring (V-connection)	
Rated Load Current (for V-connection) IL 125 A	
Follow current interrupt rating (L-N)  Ifi NFC No Follow Current®	
Follow current interrupt rating (N-PE) In 100 A rms	
Status indicator (indication of disconnector operation) / N-PE (no disconnector) 3 colours with progressive performance indication / 2 colou	rs for N-PE
Operating temperature range / Humidity -40 +80 °C (extended) / 5% 95%	
Terminal - Conductor size (double clamps for V-connection on L-terminals) 4-35 mm² flexible / 4-50 mm² semi rigid	
Mounting indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 6071	5
Case material / Flammability grade BMC / V-0 in accordance with UL 94	
Pollution degree / Degree of protection PD / IP 3 / 20 (built-in)	
Pollution degree / Degree of protection PD / IP 3 / 20 (built-in) Approximate weight 1100 g	
Pollution degree / Degree of protection PD / IP 3 / 20 (built-in) Approximate weight 1100 g Dimensions: width 105 mm (6 modules)	
Pollution degree / Degree of protection PD / IP 3 / 20 (built-in) Approximate weight 1100 g Dimensions: width 105 mm (6 modules)	
Pollution degree / Degree of protection PD / IP 3 / 20 (built-in)  Approximate weight 1100 g  Dimensions: width 105 mm (6 modules)  Remote signal contact potential-free changeover contact	


















Remote signal contact

Certifications / Quality Mark

Terminal - conductor size for remote signal contact

Switching capacity remote signal contact





230 t ff 3+1

218 141

potential-free changeover contact

max. 1,5 mm<sup>2</sup> flexible

ac: 250 V / 0,5 A - dc: 125 V / 0,2 A; 75 V / 0,5 A

CTI pending

L 50/100 230 t ff 3+1 is a ready to install assembly of three voltage limiting and a voltage switching SPD providing ten modes of protection, typically installed in three-phase plus neutral 230/400 V TT systems, where connection type CT2 (3+1) is required, and in TN systems according to HD 60364-53, with the following features and benefits:

- T1 SPD and T2 SPD (Type 1 and Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)
- Backup protection is not required with an upstream CB  $\leq$  160 A or up to an Isccr  $\leq$  5 kA rms;
- Three colour Status Indicator with progressive indication of remaining performance.
- Remote signal contact for indication of reduced performance

Model L 50/100 ... with remote signal contact

OODL		210	, 171			
Nominal ac system voltage	Un	230/400 V ac				
Modes of protection		10				
Max Continuous Operating Voltage (L-N)	Uc	335 V ac				
Continuous Operating Voltage (N-PE)		255	5 V ac			
Test Class according to IEC 61643-11 Ed.1 (2011-03)		la	ınd II			
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)		T1 :	andT2			
Impulse discharge current (10/350 µs) (L-N)	limp	50	0 kA			
Impulse discharge current (10/350 µs) (N-PE)	limp	10	100 kA			
Charge (L-N)	Q	2	5 As			
Charge (N-PE)	Q	51	0 As			
Nominal discharge current (8/20 µs) (L-N)	In	60	O kA			
Nominal discharge current (8/20 µs) (N-PE)	In	10	10 kA			
Max. discharge current (8/20 μs) (L-N)	Imax	10	10 kA			
Max. discharge current (8/20 µs) (N-PE)	Imax	15	60 kA			
Voltage protection level (L-N, L-PE) at a discharge current of: 1 kA	\ Up	≤ 0,75 kV	≤ 1,50 kV			
5 KA	\ Up	≤ 0,85 kV	≤ 1,50 kV			
13 k/	\ Up	≤ 1,10 kV	≤ 1,50 kV			
25 k/		≤ 1,25 kV	≤ 1,50 kV			
60 k/		≤ 1,70 kV	≤ 1,70 kV			
Voltage protection level (N-PE)	Up	,	.50 kV			
Response time (L-N / N-PE)	ta		/ ≤ 100 ns			
End of Life (L-N)			cuit Failure Mode)			
Behaviour in case of Temporary Overvoltage (TOV):	UT					
N-PE	E UT	1200 V / 200 n	ns, withstand (W)			
Short Circuit Current rating without backup protection (internal disconnector)	Isccr	5 k	A rms			
Short Circuit Current rating with max. backup protection fuse	Isccr	50 kA rms				
Max. back-up protection with up-stream CB having a max. let-through energy of		160 A (max.	4,50 x 10 <sup>5</sup> A <sup>2</sup> s)			
(max. prospective short circuit current depends on the CB breaking capability).						
Max. back-up protection with FUSE at prospective short circuit currents of		400 A gG (> 5 ÷ 25 kA rms	) / 250 A gG (>5 ÷ 50 kA rms)			
		160/125/100 A gG	* (> 5 ÷ 100 kA rms)			
Max. overcurrent protection for through-wiring (V-connection)		125	5 A gG			
Rated Load Current (for V-connection)	lL	12	25 A			
Follow current interrupt rating (L-N)	lfi	NFC No Follow Current®				
Follow current interrupt rating (N-PE)	lfi	100 A eff				
Status indicator (indication of disconnector operation) / N-PE (no disconnector)		3 colours with progressive perform	nance indication / 2 colours for N-PE			
Operating temperature range / Humidity		-40 +80 °C (ex	tended) / 5% 95%			
Terminal - Conductor size (double clamps for V-connection on L-terminals)		4-35 mm² flexible /	4-50 mm² semi rigid			
Mounting		indoor, 35 x 7,5 mm top	hat DIN rail IEC/EN 60715			
Case material / Flammability grade		BMC / V-0 in acc	ordance with UL 94			
Pollution degree / Degree of protection	PD / IP	3 / 20	(built-in)			
Approximate weight		21	10 g			
Dimensions: width		245 mm (	14 modules)			

<sup>\*</sup> with fuse 250 A gG limp=25 kA and Imax= 70 kA; with fuse 160 A gG limp=13 kA and Imax= 60 kA; with fuse 125 A gG limp= 10 kA and Imax= 40 kA; with fuse 100 A gG limp=9 kA and lmax= 30 kA















25/100 230 t











L 25/100 230 t ff is a voltage limiting SPD providing a single mode of protection, typically installed at the origin of the installation, e.g. in the Main Distribution Board (MDB), in TN-systems or in TT-systems in combination with N-PE SPD model I 100, I 52 and with connection type CT2 (3+1 or 1+1). It provides the following features and benefits:

- T1 SPD and T2 SPD (Type 1 and Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- L 25/100 230 t ff is a voltage limiting SPD for the protection of low voltage installations and equipment against direct and indirect lightning effects;
- Backup protection is not required with an upstream CB ≤ 160 A or up to an Isccr ≤ 5 kA rms;
- The impulse current is divided into two independent branch circuits, each branch providing its own disconnector and Status Indicator;
- Three colour Status Indicator with progressive indication of remaining performance.

Nodel L 25/100 with remote signal contact			230 t ff
ODE			215 100
ominal ac system voltage		Un	230/400 V ac
lodes of protection			1
ax Continuous Operating Voltage		Uc	335 V ac
est Class according to IEC 61643-11 Ed.1 (2011-03)			I and II
/pe according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)			T1 and T2
npulse discharge current (10/350 μs)		limp	25 kA
harge		Q	12,5 As
ominal discharge current (8/20 µs)		In	60 kA
lax. discharge current (8/20 µs)		Imax	100 kA
oltage protection level at a discharge current of:	1 kA	Up	≤ 0,70 kV
	5 kA	Up	≤ 0,82 kV
	13 kA	Up	≤ 0,95 kV
	25 kA	Up	≤ 1,05 kV
	60 kA	Uр	≤ 1,40 kV
esponse time	OU KA	ta	≤ 1,40 KV ≤ 25 ns
nd of Life		la	OCM (Open Circuit Failure Mode)
ehaviour in case of Temporary Overvoltage (TOV):		Uт	440 V / 120 min, withstand (W)
hort Circuit Current rating without backup protection (internal disconnector)		Isccr	5 kA rms
, , , , , , , , , , , , , , , , , , , ,			50 kA rms
hort Circuit Current rating with max. backup protection fuse		Isccr	
lax. back-up protection with up-stream CB with a max. let-through energy of			160 A (max. 4,50 x 10 <sup>5</sup> A <sup>2</sup> s)
nax. prospective short circuit current depends on the CB breaking capability).			
ax. back-up protection with FUSE at prospective short circuit currents of			250 A gG (> $5 \div 50$ kA rms)
			160/125/100 A gG* (> 50 ÷ 100 kA rms)
ax. overcurrent protection for through-wiring (V-connection)			125 A gG
ated Load Current (for V-connection)		IL	125 A
ollow current interrupt rating		lfi	NFC No Follow Current®
tatus indicator (indication of disconnector operation)			3 colours with progressive performance indication
perating temperature range / Humidity			-40 +80 °C (extended) / 5% 95%
erminal - Conductor size (double clamps for V-connection)			4-35 mm² flexible / 4-50 mm² semi rigid
usbar connections			fork-type busbar 16 mm²
ounting			indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715
ase material / Flammability grade			BMC / V-0 in accordance with UL 94
ollution degree / Degree of protection		PD / IP	3 / 20 (built-in)
pproximate weight			395 g
imensions: width			35 mm (2 modules)
emote signal contact			potential-free changeover contact
erminal - conductor size for remote signal contact			max. 1,5 mm² flexible
attacking and attacking a standard and a standard			050 1/0 5 8 - 1- 105 1/0 0 8 75 1/0 5 8
witching capacity remote signal contact			ac: 250 V / 0,5 A – dc: 125 V / 0,2 A; 75 V / 0,5 A
















25/100 230 t ff











of protection, typically

L 25/100 230 t ff 2 is a ready to install assembly of two voltage limiting SPDs providing three modes of protection, typically installed at the origin of the installation, e.g. in the Main Distribution Board (MDB), for single-phase 230 V TN-systems, with the following features and benefits:

- T1 SPD and T2 SPD (Type 1 and Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- L 25/100 230 t ff 2 is a voltage limiting SPD for the protection of low voltage installations and equipment against direct and indirect lightning effects;
- Backup protection is not required with an upstream CB ≤ 160 A or up to an Isccr ≤ 5 kA rms;
- The impulse current is divided into two independent branch circuits, each branch providing its own disconnector and Status Indicator;
- Three colour Status Indicator with progressive indication of remaining performance.

Model L 25/100 with remote signal contact				230 t ff 2
CODE				215 120
Nominal ac system voltage			Un	230 V ac
Modes of protection				3
Max Continuous Operating Voltage			Uc	335 V ac
Test Class according to IEC 61643-11 Ed.1 (2011-03)				I and II
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)				T1 and T2
Impulse discharge current (10/350 μs)			limp	25 kA
Charge			Q	12,5 As
Nominal discharge current (8/20 µs)			In	60 kA
Max. discharge current (8/20 μs)			Imax	100 kA
Voltage protection level (L/N-PE) at a discharge current of:		1 kA	Up	≤ 0,75 kV
		5 kA	Up	≤ 0,85 kV
		13 kA	Up	≤ 1,10 kV
		25 kA	Up	≤ 1,25 kV
		60 kA	Up	≤ 1.70 kV
Response time		00 10 1	ta	≤ 25 ns
End of Life			ecc	OCM (Open Circuit Failure Mode)
Behaviour in case of Temporary OverVoltage (TOV):	L/N-PE		UT	440 V / 120 min, withstand (W)
Short Circuit Current rating without backup protection (internal disconnector)			Isccr	5 kA rms
Short Circuit Current rating with max. backup protection fuse			Isccr	50 kA rms
Max. back-up protection with up-stream CB with a max. let-through energy of	of		10001	160 A (max. 4,50 x 10 <sup>5</sup> A <sup>2</sup> s)
(max. prospective short circuit current depends on the CB breaking capability				100 / (max 1,00 / 10 / 10)
Max. back-up protection with FUSE at prospective short circuit currents of	,,.			250 A gG (> 5 ÷ 50 kA rms)
wax. back up protection with 1 ook at prospective short circuit currents of				160/125/100 A gG* (> 50 ÷ 100 kA rms)
Max. overcurrent protection for through-wiring (V-connection)				125 A gG
Rated Load Current (for V-connection)			IL	125 A gu
Follow current interrupt rating			lfi	NFC No Follow Current®
Status indicator (indication of disconnector operation)				3 colours with progressive performance indication
Operating temperature range / Humidity				-40 +80 °C (extended) / 5% 95%
Terminal - Conductor size (double clamps for V-connection)				4-35 mm² flexible / 4-50 mm² semi rigid
Mounting				indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715
Case material / Flammability grade				BMC / V-0 in accordance with UL 94
Pollution degree / Degree of protection			PD / IP	3 / 20 (built-in)
Approximate weight			13/11	785 g
Dimensions: width				70 mm (4 modules)
Remote signal contact				potential-free changeover contact
Terminal - conductor size for remote signal contact				max. 1,5 mm² flexible
Switching capacity remote signal contact				ac: 250 V / 0,5 A – dc: 125 V / 0,2 A; 75 V / 0,5 A
Certifications / Quality Mark				, 0,0

<sup>\*</sup> with fuse 160 A gG limp=13 kA and Imax= 70 kA; with fuse 125 A gG limp= 10 kA and Imax= 40 kA; with fuse 100 A gG limp=9 kA and Imax= 30 kA

25/100 230 t ff

W
























CB, STC issued by OVE / KEMA-KEUR

L 25/100 230 t ff 3 is a ready to install assembly of three voltage limiting SPDs providing six modes of protection, typically installed at the origin of the installation, e.g. in the Main Distribution Board (MDB), for three-phase 230/400 V TN-systems, with the following features and benefits:

- T1 SPD and T2 SPD (Type 1 and Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- L 25/100 230 t ff 3 is a voltage limiting SPD for the protection of low voltage installations and equipment against direct and indirect lightning effects;
- Backup protection is not required with an upstream CB ≤ 160 A or up to an Isccr ≤ 5 kA rms;
- The impulse current is divided into two independent branch circuits, each branch providing its own disconnector and Status Indicator:
- Three colour Status Indicator with progressive indication of remaining performance.

Model L 25/100 with remote signal contact			230 t ff 3
CODE			215 130
Nominal ac system voltage		Un	230/400 V ac
Modes of protection			6
Max Continuous Operating Voltage		Uc	335 V ac
Test Class according to IEC 61643-11 Ed.1 (2011-03)			I and II
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)			T1 and T2
Impulse discharge current (10/350 µs)		limp	25 kA
Charge		Q	12,5 As
Nominal discharge current (8/20 µs)		ln	60 kA
Max. discharge current (8/20 µs)		Imax	100 kA
Voltage protection level (L-PEN) at a discharge current of:	1 kA	Up	≤ 0.75 kV
, , , , , , , , , , , , , , , , , , ,	5 kA	Up	≤ 0,85 kV
	13 kA	Up	≤ 1,10 kV
	25 kA	Up	≤ 1,25 kV
	60 kA	Up	≤ 1,70 kV
Response time	OU KA	ta	≤ 1,70 KV ≤ 25 ns
End of Life		ld	OCM (Open Circuit Failure Mode)
	-PEN	UT	440 V / 120 min, withstand (W)
Short Circuit Current rating without backup protection (internal disconnector)	-r Liv	Isccr	5 kA rms
Short Circuit Current rating without backup protection (internal disconnector)			50 kA rms
Max. back-up protection with up-stream CB with a max. let-through energy of		Isccr	160 A (max. 4,50 x 10 <sup>5</sup> A <sup>2</sup> s)
			100 A (IIIdx. 4,50 x 10° A-5)
(max. prospective short circuit current depends on the CB breaking capability).			050 4 0 / 5 50 / 4
Max. back-up protection with FUSE at prospective short circuit currents of			250 A gG (> 5 ÷ 50 kA rms)
			160/125/100 A gG* (> 50 ÷ 100 kA rms)
Max. overcurrent protection for through-wiring (V-connection)			125 A gG
Rated Load Current (for V-connection)		lL .	125 A
Follow current interrupt rating		lfi	NFC No Follow Current®
Status indicator (indication of disconnector operation)			3 colours with progressive performance indication
Operating temperature range / Humidity			-40 +80 °C (extended) / 5% 95%
Terminal - Conductor size (double clamps for V-connection)			4-35 mm² flexible / 4-50 mm² semi rigid
Mounting			indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715
Case material / Flammability grade			BMC / V-0 in accordance with UL 94
Pollution degree / Degree of protection		PD / IP	3 / 20 (built-in)
Approximate weight			1180 g
Dimensions: width			105 mm (6 modules)
Remote signal contact			potential-free changeover contact
Terminal - conductor size for remote signal contact			max. 1,5 mm² flexible
Switching capacity remote signal contact			ac: 250 V / 0,5 A - dc: 125 V / 0,2 A; 75 V / 0,5 A

<sup>\*</sup> with fuse 160 A gG limp=13 kA and lmax= 70 kA; with fuse 125 A gG limp= 10 kA and lmax= 40 kA; with fuse 100 A gG limp=9 kA and lmax= 30 kA

Certifications / Quality Mark

100 230 t ff














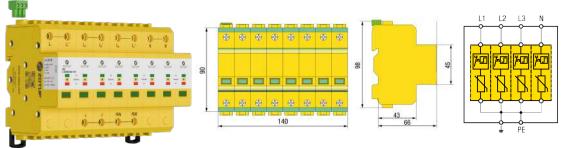

L 25/100 230 t ff 4 is a ready to install assembly of four voltage limiting SPDs providing ten modes of protection, typically installed at the origin of the installation, e.g. in the Main Distribution Board (MDB), for three-phase plus neutral 230/400 V TN-systems, with the following features and benefits:

- T1 SPD and T2 SPD (Type 1 and Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- L 25/100 230 t ff 4 s a voltage limiting SPD for the protection of low voltage installations and equipment against direct and indirect lightning effects;
- Backup protection is not required with an upstream CB ≤ 160 A or up to an Isccr ≤ 5 kA rms;
- The impulse current is divided into two independent branch circuits, each branch providing its own disconnector and Status Indicator:
- Three colour Status Indicator with progressive indication of remaining performance.

Model L	25/100	with	remote	signal	contact

230	t	ff	4
-----	---	----	---

CODE			215 140
Nominal ac system voltage		Un	230/400 V ac
Modes of protection			10
Max Continuous Operating Voltage		Uc	335 V ac
Test Class according to IEC 61643-11 Ed.1 (2011-03)			I and II
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)			T1 and T2
Impulse discharge current (10/350 µs)		limp	25 kA
Charge		Q	12,5 As
Nominal discharge current (8/20 µs)		<b>I</b> n	60 kA
Max. discharge current (8/20 μs)		Imax	100 kA
Voltage protection level (L/N-PE) at a discharge current of:	1 kA	Up	≤ 0,75 kV
	5 kA	Up	≤ 0,85 kV
	13 kA	Up	≤ 1,10 kV
	25 kA	Up	≤ 1,25 kV
	60 kA	Up	≤ 1,70 kV
Response time	00 10 1	ta	≤ 25 ns
End of Life			OCM (Open Circuit Failure Mode)
Behaviour in case of Temporary OverVoltage (TOV): L/N-PE		UT	440 V / 120 min, withstand (W)
Short Circuit Current rating without backup protection (internal disconnector)		Isccr	5 kA rms
Short Circuit Current rating with max. backup protection fuse		Isccr	50 kA rms
Max. back-up protection with up-stream CB with a max. let-through energy of			160 A (max. 4,50 x 10 <sup>5</sup> A <sup>2</sup> s)
(max. prospective short circuit current depends on the CB breaking capability).			,
Max. back-up protection with FUSE at prospective short circuit currents of			250 A qG (> 5 ÷ 50 kA rms)
			160/125/100 A gG* (> 50 ÷ 100 kA rms)
Max. overcurrent protection for through-wiring (V-connection)			125 A qG
Rated Load Current (for V-connection)		IL	125 A
Follow current interrupt rating		lfi	NFC No Follow Current®
Status indicator (indication of disconnector operation)			3 colours with progressive performance indication
Operating temperature range / Humidity			-40 +80 °C (extended) / 5% 95%
Terminal - Conductor size (double clamps for V-connection)			4-35 mm² flexible / 4-50 mm² semi rigid
Mounting			indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715
Case material / Flammability grade			BMC / V-0 in accordance with UL 94
Pollution degree / Degree of protection		PD / IP	3 / 20 (built-in)
Approximate weight			1368 g
Dimensions: width			140 mm (8 modules)
Remote signal contact			potential-free changeover contact
Terminal - conductor size for remote signal contact			max. 1,5 mm² flexible
Switching capacity remote signal contact			ac: 250 V / 0,5 A - dc: 125 V / 0,2 A; 75 V / 0,5 A
Certifications / Quality Mark			CB, STC issued by OVE / KEMA-KEUR

<sup>\*</sup> with fuse 160 A gG limp=13 kA and Imax= 70 kA; with fuse 125 A gG limp= 10 kA and Imax= 40 kA; with fuse 100 A gG limp=9 kA and Imax= 30 kA


















25/100 230 t ff 1+1











L 25/100 230 t ff 1+1 is a ready to install assembly of a voltage limiting and a voltage switching SPD providing three modes of protection, typically installed in single-phase 230 V TT-systems where connection type CT2 (1+1) is required according to HD 60364-5-53, e.g. in the service entrance board (SEB), with the following features and benefits:

- T1 SPD and T2 SPD (Type 1 and Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- Backup protection is not required with an upstream CB ≤ 160 A or up to an lsccr ≤ 5 kA rms;
- Three colour Status Indicator with progressive indication of remaining performance.

### Model L 25/100 ... with remote signal contact

230 t ff 1+1

Nominal ac system voltage       UN       230 V ac         Modes of protection       3         Max Continuous Operating Voltage (L-N)       Uc       335 V ac         Max Continuous Operating Voltage (N-PE)       Uc       255 V ac         Test Class according to IEC 61643-11 Ed.1 (2011-03)       I and II         Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)       T1 and T2         Impulse discharge current (10/350 μs) (L-N)       Iimp       25 kA         Impulse discharge current (10/350 μs) (N-PE)       Iimp       52 kA         Charge (L-N)       Q       12,5 As         Charge (N-PE)       Q       26 As				
Max Continuous Operating Voltage (L-N)  Max Continuous Operating Voltage (N-PE)  Uc  255 V ac  Test Class according to IEC 61643-11 Ed.1 (2011-03)  Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)  Inpulse discharge current (10/350 μs) (L-N)  Impulse discharge current (10/350 μs) (N-PE)  Charge (L-N)  Q  135 V ac  155 V ac  1 and II  1 and T2  Impulse discharge current (10/350 μs) (N-PE)  Imp				
Max Continuous Operating Voltage (N-PE) Uc 255 V ac Test Class according to IEC 61643-11 Ed.1 (2011-03) I and II Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025) T1 and T2 Impulse discharge current (10/350 μs) (L-N) Impulse discharge current (10/350 μs) (N-PE) Impulse (10/350 μs) (N-PE) Impulse discharge current (10/350 μs) (N-PE) Q 12,5 As				
Test Class according to IEC 61643-11 Ed.1 (2011-03)  Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)  Impulse discharge current (10/350 μs) (L-N)  Impulse discharge current (10/350 μs) (N-PE)  Charge (L-N)  Imp				
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)				
Impulse discharge current (10/350 μs) (L-N)limp25 kAImpulse discharge current (10/350 μs) (N-PE)limp52 kACharge (L-N)Q12,5 As				
Impulse discharge current (10/350 µs) (N-PE)  Charge (L-N)  Imp  52 kA  12,5 As				
Impulse discharge current (10/350 μs) (N-PE)         Imp         52 kA           Charge (L-N)         Q         12,5 As				
5. margo (2.1.)	52 kA			
Nominal discharge current (8/20 µs) (L-N) In 60 kA				
Nominal discharge current (8/20 µs) (N-PE)				
Max. discharge current (8/20 μs) (L-N) I <sub>max</sub> 100 kA				
Max. discharge current (8/20 µs) (N-PE)  Imax  70 kA				
Voltage protection level (L-N, L-PE) at a discharge current of: $1 \text{ kA}$ Up $\leq 0.75 \text{ kV}$ $\leq 1.5$	00 kV			
5 kA U <sub>0</sub> ≤ 0.85 kV ≤ 1.5				
13 kA Up ≤ 1,10 kV ≤ 1,5				
25 kA U <sub>D</sub> ≤ 1,25 kV ≤ 1,5				
$60 \text{ kA}  U_D \qquad \qquad \leq 1,23 \text{ kV} \qquad \qquad \leq 1,30 \text{ kV} \qquad \qquad \leq 1,70 \text$				
Voltage protection level (N-PE) $U_{\rm p}$ $\leq$ 1,70 kV $\leq$ 1,50 kV	UKV			
Response time (L-N / N-PE) $t_a \le 25 \text{ ns } / \le 100 \text{ ns}$				
End of Life (L-N)  OCM (Open Circuit Failure Mode)				
Behaviour in case of Temporary Overvoltage (TOV)  L-N UT  440 V / 120 min, withstand (W)				
N-PE UT 1200 V / 200 ms. withstand (W)				
Short Circuit Current rating without backup protection (internal disconnector)  Short Circuit Current rating without backup protection (internal disconnector)  Iscor  5 kA rms				
(max. prospective short circuit current depends on the CB breaking capability).				
Max. back-up protection with FUSE at prospective short circuit currents of $250 \text{ A gG} (> 5 \div 50 \text{ kA rms})$				
160/125/100 A gG* (> 5 ÷ 100 kA rms)				
Max. overcurrent protection for through-wiring (V-connection)  125 A gG				
Rated Load Current (for V-connection)  IL 125 A				
Follow current interrupt rating (L-N)  Ifi  NFC No Follow Current®				
Follow current interrupt rating (N-PE)  Ifi 100 A rms	I ( N DE			
Status indicator (indication of disconnector operation) / N-PE (no disconnector)  3 colours with progressive performance indication / 2 colours with performance / 2 colours with performanc				
Operating temperature range / Humidity -40 +80 °C (extended) / 5% 95%				
Terminal - Conductor size (double clamps for V-connection on L-terminals)  4-35 mm² flexible / 4-50 mm² semi rigit				
Mounting indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 6	00/15			
Case material / Flammability grade  BMC / V-0 in accordance with UL 94				
Pollution degree / Degree of protection PD / IP 3 / 20 (built-in)				
Approximate weight 550 g				
Dimensions: width 53 mm (3 modules)				
Remote signal contact potential-free changeover contact				
Terminal - conductor size for remote signal contact max. 1,5 mm² flexible	0.5.4			
Switching capacity remote signal contact ac: 250 V / 0,5 A – dc: 125 V / 0,2 A; 75 V / 0,0 A / C / C / C / C / C / C / C / C / C /	U,5 A			
Certifications / Quality Mark CB, STC issued by OVE / KEMA-KEUR				

<sup>\*</sup> with fuse 160 A gG limp=13 kA and lmax= 70 kA; with fuse 125 A gG limp= 10 kA and lmax= 40 kA; with fuse 100 A gG limp=9 kA and lmax= 30 kA

/100 230 t ff 3+1











## Surge Protective Devices: **ZOTUPLIMITER**














L 25/100 230 t ff 3+1 is a ready to install assembly of three voltage limiting and a voltage switching SPD providing ten modes of protection, typically installed in three-phase plus neutral 230/400 V TT-systems where connection type CT2 (3+1) is required according to HD 60364-5-53, e.g. in the service entrance board (SEB), with the following features and benefits:

- T1 SPD and T2 SPD (Type 1 and Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- Backup protection is not required with an upstream CB ≤ 160 A or up to an lsccr ≤ 5 kA rms;
- Three colour Status Indicator with progressive indication of remaining performance.

Model L 25/100 with remote signal contact			230 t ff		
CODE			215 1		
lominal ac system voltage		Un	230/400		
Nodes of protection			10		
Max Continuous Operating Voltage (L-N)			335 V	ac	
Max Continuous Operating Voltage (N-PE)		Uc	255 V	ac	
est Class according to IEC 61643-11 Ed.1 (2011-03)			I and	II	
ype according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11	(2025)		T1 and	IT2	
mpulse discharge current (10/350 μs) (L-N)		limp	25 k	A	
mpulse discharge current (10/350 μs) (N-PE)		limp	100 I	<b>KA</b>	
harge (L-N)		Q	12,5	As	
harge (N-PE)		Q	50 A	S	
lominal discharge current (8/20 µs) (L-N)		In	60 k	A	
lominal discharge current (8/20 µs) (N-PE)		In	100 I	κA	
Max. discharge current (8/20 μs) (L-N)		Imax	100	κA	
Max. discharge current (8/20 μs) (N-PE)		Imax	150	ΚA	
oltage protection level (L-N, L-PE) at a discharge current of:	1 kA	Up	≤ 0,75 kV	≤ 1,50 kV	
, , , , , , , , , , , , , , , , , , ,	5 kA	Up	≤ 0,85 kV	≤ 1,50 kV	
	13 kA	Up	≤ 1,10 kV	≤ 1,50 kV	
	25 kA	Up	≤ 1,15 kV ≤ 1,25 kV	≤ 1,50 kV	
	60 kA	Up	≤ 1,70 kV	≤ 1,70 kV	
oltage protection level (N-PE)	OU KA	Up	≤ 1,70 KV ≤ 1,50	·	
· ,					
desponse time (L-N / N-PE)		ta	≤ 25 ns / ≤		
nd of Life (L-N)	LAL	I I+	OCM (Open Circui		
ehaviour in case of Temporary Overvoltage (TOV)	L-N N-PE	Uт Uт	440 V / 120 min,		
hart Circuit Current rating without hookup protection (internal d			1200 V / 200 ms,		
hort Circuit Current rating without backup protection (internal d	iisconnector)	Isccr	5 kA rms 50 kA rms		
hort Circuit Current rating with max. backup protection fuse		Isccr	160 A (max. 4,50 x 10 <sup>5</sup> A <sup>2</sup> s)		
flax. back-up protection with up-stream CB having a max. let-th			160 A (max. 4,	50 X 10° A <sup>2</sup> S)	
max. prospective short circuit current depends on the CB break					
lax. back-up protection with FUSE at prospective short circuit of	currents of		250 A gG (> 5 -	· · · · · · · · · · · · · · · · · · ·	
			160/125/100 A gG* (x	> 5 ÷ 100 kA rms)	
Max. overcurrent protection for through-wiring (V-connection)			125 A	gG	
ated Load Current (for V-connection)		lL	125		
ollow current interrupt rating (L-N)		lfi	NFC No Follow Current®		
ollow current interrupt rating (N-PE)		lfi	100 A	rms	
tatus indicator (indication of disconnector operation) / N-PE (no	disconnector)		3 colours with progressive performan	nce indication / 2 colours for N-P	
perating temperature range / Humidity			-40 +80 °C (exter	nded) / 5% 95%	
erminal - Conductor size (double clamps for V-connection)			4-35 mm² flexible / 4-	-50 mm² semi rigid	
<b>Nounting</b>			indoor, 35 x 7,5 mm top ha		
ase material / Flammability grade			BMC / V-0 in accord	lance with UL 94	
ollution degree / Degree of protection		PD / IP	3 / 20 (bi	uilt-in)	
pproximate weight			1495	g	
imensions: width			140 mm (8	•	
emote signal contact			potential-free char		
			•	•	
erminal - conductor size for remote signal contact			max. 1.5 mn	n' nexidie	
erminal - conductor size for remote signal contact witching capacity remote signal contact			max. 1,5 mn ac: 250 V / 0,5 A – dc: 129		

<sup>\*</sup> with fuse 160 A gG limp=13 kA and lmax= 70 kA; with fuse 125 A gG limp= 10 kA and lmax= 40 kA; with fuse 100 A gG limp=9 kA and lmax= 30 kA





























IA 25 230 is a voltage switching SPD with a single mode of protection, typically installed at the origin of the installation, e.g. in the Main Distribution Board (MDB), in TN-systems or in TT-systems in combination with N-PE SPD model I 100, I 52 and with connection type CT2 (3+1 or 1+1), providing the following features and benefits:

- T1 SPD and T2 SPD (Type 1 and Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- IA 25 230 is a self extinguishing spark gap based switching SPD, for the protection of low voltage installations against direct and indirect lightning effects;
- Impulse discharge current of 25 kA 10/350 μs;
- Nominal discharge current of 25 kA 8/20 μs;
- . High self extinguishing capability of 16 kA rms (follow current interrupt rating);
- Green LED Status Indicator;
- The special housing is designed for "Pollution Degree 3".

Model IA 25		230
CODE		203 100
Nominal ac system voltage	Un	230/400 V ac
Modes of protection		1
Max Continuous Operating Voltage	Uc	255 V ac
Test Class according to IEC 61643-11 Ed.1 (2011-03)		I and II
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)		T1 and T2
Impulse discharge current (10/350 μs)	limp	25 kA
Charge	Q	12,5 As
Nominal discharge current (8/20 µs)	In	25 kA
Short Circuit Current rating with max. backup protection	Isccr	16 kA rms
Follow current interrupt rating	lfi	16 kA rms
Voltage protection level	Up	≤ 2,00 kV
Max. backup protection with fuse		315 A gG*
Max. overcurrent protection for through-wiring (V-connection)		125 A gG*
Rated Load Current (for V-connection)	lL	125 A
Behaviour in case of Temporary OverVoltage (TOV)	UT	440 V / 120 min, withstand (W)
Response time	ta	≤ 100 ns
Insulation resistance	Rins	≥ 1 G Ω
Status Indicator		Green LED
Operating temperature range / Humidity		-40 +80 °C (extended) / 5% 95%
Terminal-Conductor size (double clamps for V-connection)		4-35 mm² flexible / 4-50 mm² semi rigid
Busbar connections		fork-type busbar 16 mm <sup>2</sup>
Mounting		indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715
Case material / Flammability grade		BMC / V-0 in accordance with UL 94
Pollution degree / Degree of protection	PD / IP	3 / 20 (built-in)
Approximate weight		265 g
Dimensions: width		35 mm (2 modules)
Certifications / Quality Mark		CB, STC issued by OVE / KEMA-KEUR
Additional Technical Information: for application at locations with a prospective short		
circuit current higher than the follow current interrupt rating Ifi		
Max. prospective short circuit current at the SPD's point of installation		50 kA rms (tested by CTI)
External backup fuse required		315 A gG

<sup>\*</sup> with fuse 125 A gG limp= 10 kA and Imax= 40 kA; with fuse 100 A gG limp=9 kA and Imax= 30 kA











## Surge Protective Devices: **ZOTUPGAP**
















IA 25 230 2 is a ready to install assembly of two voltage switching SPDs providing three modes of protection, typically installed at the origin of the installation, e.g. in the Main Distribution Board (MDB), for single-phase 230 V TN-systems with the following features and benefits:

- T1 SPD and T2 SPD (Type 1 and Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- IA 25 230 2 is a self extinguishing spark gap based switching SPD, for the protection of low voltage installations against direct and indirect lightning effects;
- Impulse discharge current of 25 kA 10/350 μs;
- Nominal discharge current of 25 kA 8/20 μs;
- · High self extinguishing capability of 16 kA rms (follow current interrupt rating);
- Green LED Status Indicator;
- The special housing is designed for "Pollution Degree 3".

Model IA 25		230 2
CODE		203 120
Nominal ac system voltage	Un	230 V ac
Modes of protection		3
Max Continuous Operating Voltage	Uc	255 V ac
Test Class according to IEC 61643-11 Ed.1 (2011-03)		I and II
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)		T1 and T2
Impulse discharge current (10/350 μs)	limp	25 kA
Charge	Q	12,5 As
Nominal discharge current (8/20 µs)	In	25 kA
Short Circuit Current rating with max. backup protection	Isccr	16 kA rms
Follow current interrupt rating	lfi	16 kA rms
Voltage protection level	Up	≤ 2,00 kV
Max. back-up protection with fuse (L)		315 A gG*
Max. overcurrent protection for through-wiring (V-connection)		125 A gG*
Rated Load Current (for V-connection)	lL	125 A
Behaviour in case of Temporary OverVoltage (TOV)	UT	440 V / 120 min, withstand (W)
Response time	ta	≤ 100 ns
Insulation resistance	Rins	≥ 1 G Ω
Status Indicator		Green LED (L-N)
Operating temperature range / Humidity		-40 +80 °C (extended) / 5% 95%
Terminal-Conductor size (double clamps for V-connection)		4-35 mm² flexible / 4-50 mm² semi rigid
Mounting		indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715
Case material / Flammability grade		BMC / V-0 in accordance with UL 94
Pollution degree / Degree of protection	PD / IP	3 / 20 (built-in)
Approximate weight		530 g
Dimensions: width		70 mm (4 modules)
Certifications / Quality Mark		CB, STC issued by OVE / KEMA-KEUR
Additional Technical Information: for application at locations with a prospective short		
circuit current higher than the follow current interrupt rating Ifi		
Max. prospective short circuit current at the SPD's point of installation		50 kA rms (tested by CTI)
External backup fuse required		315 A gG

<sup>\*</sup> with fuse 125 A gG limp= 10 kA and lmax= 40 kA; with fuse 100 A gG limp=9 kA and lmax= 30 kA
























IA 25 230 4 is a ready to install assembly of four voltage switching SPDs providing ten modes of protection, typically installed at the origin of the installation, e.g. in the Main Distribution Board (MDB), for three-phase plus neutral  $230/400 \, \text{V}$  TN-S systems with the following features and benefits:

- T1 SPD and T2 SPD (Type 1 and Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- IA 25 230 4 is a self extinguishing spark gap based switching SPD, for the protection of low voltage installations against direct and indirect lightning effects;
- Impulse discharge current of 25 kA 10/350 μs;
- Nominal discharge current of 25 kA 8/20 μs;
- · High self extinguishing capability of 16 kA rms (follow current interrupt rating);
- Green LED Status Indicator;z
- The special housing is designed for "Pollution Degree 3".

Model IA 25		230 4
CODE		203 140
Nominal ac system voltage	Un	230/400 V ac
Modes of protection		10
Max Continuous Operating Voltage	Uc	255 V ac
Test Class according to IEC 61643-11 Ed.1 (2011-03)		I and II
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)		T1 and T2
Impulse discharge current (10/350 µs)	limp	25 kA
Charge	Q	12,5 As
Nominal discharge current (8/20 µs)	In	25 kA
Short Circuit Current rating with max. backup protection	Isccr	16 kA rms
Follow current interrupt rating	lfi	16 kA rms
Voltage protection level	Up	≤ 2,00 kV
Max. back-up protection with fuse (L)		315 A gG*
Max. overcurrent protection for through-wiring (V-connection)		125 A gG*
Rated Load Current (for V-connection)	lL	125 A
Behaviour in case of Temporary OverVoltage (TOV)	UT	440 V / 120 min, withstand (W)
Response time	ta	≤ 100 ns
Insulation resistance	Rins	≥ 1 G Ω
Status Indicator		Green LED (L-N)
Operating temperature range / Humidity		-40 +80 °C (extended) / 5% 95%
Terminal-Conductor size (double clamps for V-connection)		4-35 mm² flexible / 4-50 mm² semi rigid
Mounting		indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715
Case material / Flammability grade		BMC / V-0 in accordance with UL 94
Pollution degree / Degree of protection	PD / IP	3 / 20 (built-in)
Approximate weight		1060 g
Dimensions: width		140 mm (8 modules)
Certifications / Quality Mark		CB, STC issued by OVE / KEMA-KEUR
Additional Technical Information: for application at locations with a prospective short		
circuit current higher than the follow current interrupt rating Ifi		
Max. prospective short circuit current at the SPD's point of installation		50 kA rms (tested by CTI)
External backup fuse required		315 A gG

<sup>\*</sup> with fuse 125 A gG limp= 10 kA and Imax= 40 kA; with fuse 100 A gG limp=9 kA and Imax= 30 kA













## Surge Protective Devices: **ZOTUPGAP**

















IA 25 230 1+1 is a ready to install assembly of two voltage switching SPDs providing three modes of protection, typically installed at the origin of the installation, e.g. in the main distribution board (MDB), in single-phase 230 V TT-systems where connection type CT2 (1+1) is required according to HD 60364-5-53, with the following features and benefits:

- T1 SPD and T2 SPD (Type 1 and Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- IA 25 230 1+1 is a self extinguishing spark gap and GDT based switching SPD, for the protection of low voltage installations • against direct and indirect lightning effects;
- Impulse discharge current (L-N) of 25 kA 10/350 µs;
- Impulse discharge current (N-PE) of 52 kA 10/350 µs;
- High self extinguishing capability of 16 kA rms (follow current interrupt rating L-N);
- Green LED Status Indicator;
- The special housing is designed for "Pollution Degree 3".

Model IA 25		230 1+1		
CODE		203 121		
Nominal ac system voltage	Un	230 V ac		
Modes of protection		3		
Max Continuous Operating Voltage	Uc	255 V ac		
Test Class according to IEC 61643-11 Ed.1 (2011-03)		I and II		
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)		T1 and T2		
Impulse discharge current (10/350 µs) (L-N)	limp	25 kA		
Impulse discharge current (10/350 µs) (N-PE)	limp	52 kA		
Charge (L-N)	Q	12,5 As		
Charge (N-PE)	Q	26 As		
Nominal discharge current (8/20 µs) (L-N)	In	25 kA		
Nominal discharge current (8/20 µs) (N-PE)	In	52 kA		
Short Circuit Current rating with max. backup protection	Isccr	16 kA rms		
Follow current interrupt rating (L-N)	lfi	16 kA rms		
Follow current interrupt rating (N-PE)	lfi	100 A rms		
Voltage protection level (L-N, N-PE, L-PE)	Up	$\leq 2,00 \text{ kV}$ $\leq 1,50 \text{ kV}$ $\leq 2,00 \text{ kV}$		
Max. overcurrent protection fuse		315 A qG*		
Max. overcurrent protection for through-wiring (V-connection)		125 A gG*		
Rated Load Current (for V-connection)	IL	125 A		
Behaviour in case of Temporary OverVoltage (TOV):	UT	440 V / 120 min, withstand (W)		
N-PE	Uт	1200 V / 200 ms, withstand (W)		
Response time	ta	≤ 100 ns		
Insulation resistance	Rins	$\geq$ 1 G $\Omega$		
Status Indicator / N-PE (no disconnector)		Green LED / 2 colour indication (green/red) for N-PE		
Operating temperature range / Humidity		-40 +80 °C (extended) / 5% 95%		
Terminal-Conductor size (double clamps for V-connection on L-terminal)		4-35 mm² flexible / 4-50 mm² semi rigid		
Mounting		indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715		
Case material / Flammability grade		BMC / V-0 in accordance with UL 94		
Pollution degree / Degree of protection	PD / IP	3 / 20 (built-in)		
Approximate weight		420 g		
Dimensions: width		53 mm (3 modules)		
Certifications / Quality Mark		CB, STC issued by OVE / KEMA-KEUR		
Additional Technical Information: for application at locations with a prospective short				
circuit current higher than the follow current interrupt rating Ifi				
on our our our ingree area are remote our one meeting in				
Max. prospective short circuit current at the SPD's point of installation		50 kA rms (tested by CTI)		

<sup>\*</sup> with fuse 125 A gG limp= 10 kA and lmax=40 kA, with fuse 100 A gG limp=9 kA and lmax= 30 kA
























IA 25 230 3+1 is a ready to install assembly of four voltage switching SPDs providing ten modes of protection, typically installed in three-phase plus neutral 230/400 V TT-systems where connection type CT2 (3+1) is required according to HD 60364-5-53, e.g. in the service entrance board (SEB), with the following features and benefits:

- T1 SPD and T2 SPD (Type 1 and Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- IA 25 230 3+1 is a self extinguishing spark gap and GDT based switching SPD, for the protection of low voltage installations against direct and indirect lightning effects;
- Impulse discharge current (L-N) of 25 kA 10/350 μs;
- Impulse discharge current (N-PE) of 100 kA 10/350 μs;
- High self extinguishing capability of 16 kA rms (follow current interrupt rating L-N);
- Green LED Status Indicator;
- The special housing is designed for "Pollution Degree 3".

Model IA 25		230 3+1		
CODE		203 141		
Nominal ac system voltage	Un	230/400 V ac		
Modes of protection		10		
Max Continuous Operating Voltage	Uc	255 V ac		
Test Class according to IEC 61643-11 Ed.1 (2011-03)		I and II		
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)		T1 and T2		
mpulse discharge current (10/350 μs) (L-N)	limp	25 kA		
Impulse discharge current (10/350 µs) (N-PE)	limp	52 kA		
Charge (L-N)	Q	12,5 As		
Charge (N-PE)	Q	26 As		
Nominal discharge current (8/20 µs) (L-N)	In	25 kA		
Nominal discharge current (8/20 µs) (N-PE)	In	52 kA		
Short Circuit Current rating with max. backup protection	Isccr	16 kA rms		
Follow current interrupt rating (L-N)	lfi	16 kA rms		
Follow current interrupt rating (N-PE)	<b>l</b> fi	100 A rms		
/oltage protection level (L-N, N-PE, L-PE)	Up	$\leq 2,00 \text{ kV}$ $\leq 1,50 \text{ kV}$ $\leq 2,00 \text{ kV}$		
Max. back-up protection with fuse		315 A gG*		
Max. overcurrent protection for through-wiring (V-connection)		125 A gG*		
Rated Load Current (for V-connection)	IL	125 A		
Behaviour in case of Temporary OverVoltage (TOV):	I UT	440 V / 120 min, withstand (W)		
N-Pi	E UT	1200 V / 200 ms, withstand (W)		
Response time	ta	≤ 100 ns		
nsulation resistance	Rins	≥ 1 <b>G</b> Ω		
Status Indicator / N-PE (no disconnector)		Green LED / 2 colour indication (green/red) for N-PE		
Operating temperature range / Humidity		-40 +80 °C (extended) / 5% 95%		
Ferminal-Conductor size (double clamps for V-connection)		4-35 mm² flexible / 4-50 mm² semi rigid		
Mounting		indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715		
Case material / Flammability grade		BMC / V-0 in accordance with UL 94		
Pollution degree / Degree of protection	PD / IP	3 / 20 (built-in)		
Approximate weight		1060 g		
Dimensions: width		140 mm (8 modules)		
Certifications / Quality Mark		CB, STC issued by OVE / KEMA-KEUR		
Additional Technical Information: for application at locations with a prospective short				
circuit current higher than the follow current interrupt rating Ifi				
Max. prospective short circuit current at the SPD's point of installation		50 kA rms (tested by CTI)		
External backup fuse required		315 A gG		

<sup>\*</sup> with fuse 125 A gG limp= 10 kA and lmax=40 kA; with fuse 100 A gG limp=9 kA and lmax= 30 kA




























I 100 N-PE is a voltage switching SPD providing three modes of protection, typically installed in TT-systems between neutral conductor N and protective earth PE, where connection type CT2 (1+1 or 3+1) is required according to HD 60364-5-53, e.g. in the main distribution board (MDB), with the following features and benefits:

- T1 SPD and T2 SPD (Type 1 and Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- I 100 N-PE is a Gas Discharge Tube (GDT) based SPD, for the protection of low voltage installations and equipment against direct and indirect lightning effects;
- Impulse discharge current of 100 kA 10/350 μs;
- Nominal discharge current of 100 kA 8/20 μs;
- The special housing is designed for "Pollution Degree 3";
- To be combined with IA 25 or L 25/100 230 ff.

### Model I 100 N-PE

Model I Too N-PE		
CODE		208 300
Nominal ac system voltage	Un	230 V ac
Modes of protection		3
Max Continuous Operating Voltage	Uc	255 V ac
Test Class according to IEC 61643-11 Ed.1 (2011-03)		I and II
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)		T1 and T2
Impulse discharge current (10/350 µs)	limp	100 kA
Charge	Q	50 As
Nominal discharge current (8/20 µs)	In	100 kA
Max. discharge current (8/20 μs)	Imax	150 kA
Follow current interrupt rating	lfi	100 A rms
Voltage protection level	Up	≤ 1,50 kV
Max. overcurrent protection for through-wiring (V-connection)		125 A gG*
Rated Load Current (for V-connection)	lL	125 A
Response Time	ta	≤ 100 ns
Behaviour in case of Temporary OverVoltage (TOV):	UT	1200 V / 200 ms, withstand (W)
Status indicator (no disconnector)		2 colour indication (green/red)
Operating temperature range / Humidity		-40 +80 °C (extended) / 5% 95%
Terminal-Conductor size		4-35 mm² flexible / 4-50 mm² semi rigid
Busbar connections		fork-type busbar 16 mm <sup>2</sup>
Mounting		indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715
Case material / Flammability grade		BMC / V-0 in accordance with UL 94
Pollution degree / Degree of protection	PD / IP	3 / 20 (built-in)
Approximate weight		240 g
Dimensions: width		35 mm (2 modules)
To be combined with		IA 25 or L 25/100 230 ff
Switching capacity remote signal contact		ac: 250 V / 0,5 A - dc: 125 V / 0,2 A; 75 V / 0,5 A
Certifications / Quality Mark		CB, STC issued by OVE / KEMA-KEUR

<sup>\*</sup> with fuse 125 A gG limp= 10 kA and Imax= 40 kA; with fuse 100 A gG limp=9 kA and Imax= 30 kA

























L 13/40 230 ff is a voltage limiting SPD providing a single mode of protection, typically installed at the origin of the installation, e.q. in the Main Distribution Board (MDB), in TN-systems or in TT-systems in combination with N-PE SPD model I 100, I 52 and with connection type CT2 (1+1 or 3+1). It provides the following features and benefits:

- T1 SPD and T2 SPD (Type 1 and Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- L 13/40 230 ff is a voltage limiting SPD, for the protection of low voltage installations and equipment against direct and indirect lightning effects;
- Backup protection is not required with an upstream CB ≤ 160 A or up to an Isccr ≤ 5 kA rms;
- Short circuit current withstand of 100 kA rms with max. back-up fuse;
- Three colour Status Indicator with progressive indication of remaining performance.

ODE  ominal ac system voltage  ondes of protection  ax Continuous Operating Voltage  set Class according to IEC 61643-11 Ed.1 (2011-03)  repe according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)  inpulse discharge current (10/350 μs)  limp harge  Q	<b>204 100</b> 230/400 V ac 1
odes of protection ax Continuous Operating Voltage ust Class according to IEC 61643-11 Ed.1 (2011-03) upe according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025) upulse discharge current (10/350 µs)	230/400 V ac 1
ax Continuous Operating Voltage  est Class according to IEC 61643-11 Ed.1 (2011-03)  r/pe according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)  npulse discharge current (10/350 µs)	1
est Class according to IEC 61643-11 Ed.1 (2011-03)  //pe according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)  npulse discharge current (10/350 µs)	
rpe according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)  npulse discharge current (10/350 µs) limp	335 V ac
npulse discharge current (10/350 μs) limp	I and II
	T1 and T2
narge Q	13 kA
	6,5 As
ominal discharge current (8/20 μs)	35 kA
ax. discharge current (8/20 µs)	70 kA
oltage protection level at a discharge current of: $1 \text{ kA}  \text{U}_{\text{P}}$	≤ 0,79 kV
5 kA Up	≤ 0,90 kV
15 kA Up	≤ 1,10 kV
20 kA Up	≤ 1,20 kV
35 kA Up	≤ 1,50 kV
esponse time ta	≤ 25 ns
nd of Life	OCM (Open Circuit Failure Mode)
ehaviour in case of Temporary OverVoltage (TOV)	440 V / 120 min, withstand (W)
nort Circuit Current rating without backup protection (internal disconnector)	5 kA rms
nort Circuit Current rating with max. backup protection fuse	100 kA rms
ax. back-up protection with up-stream CB with a max. let-through energy of	160 A (max. 4,50 x 10 <sup>5</sup> A <sup>2</sup> s)
nax. prospective short circuit current depends on the CB breaking capability)	
ax. back-up protection with FUSE at prospective short circuit currents of	$160/125 \text{ A gG}^* (> 5 \div 100 \text{ kA rms})$
ollow current interrupt rating	NFC No Follow Current®
tatus indicator (indication of disconnector operation)	3 colours with progressive performance indication
perating temperature range / Humidity	-40 +80 °C (extended) / 5% 95%
erminal - Conductor size	4-35 mm² flexible / 4-50 mm² semi rigid
usbar connections	fork-type busbar 16 mm <sup>2</sup>
ounting	indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715
ase material / Flammability grade	BMC / V-0 in accordance with UL 94
ollution degree / Degree of protection PD / IP	3 / 20 (built-in)
pproximate weight	195 g
imensions: width	17,5 mm (1 module)
ertifications / Quality Mark	CB, STC issued by OVE / KEMA-KEUR

Model L 13/40.	with	remote	signal	contact
----------------	------	--------	--------	---------

Model L 13/40 with remote signal contact	230 t ff
CODE	214 100
Remote signal contact	potential-free changeover contact
Terminal - conductor size for remote signal contact	max. 1,5 mm² flexible
Switching capacity remote signal contact	ac: 250 V / 0,5 A – dc: 125 V / 0,2 A; 75 V / 0,5 A




























L 13/40 230 ff 2 is a ready to install assembly of two voltage limiting SPDs providing three modes of protection, typically installed at the origin of the installation, e.g. in the Main Distribution Board (MDB), for single-phase 230 V TN-systems, with the following features and benefits:

- T1 SPD and T2 SPD (Type 1 and Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- L 13/40 230 ff 2 is a voltage limiting SPD, for the protection of low voltage installations and equipment against direct and indirect lightning effects;
- Backup protection is not required with an upstream  $CB \le 160$  A or up to an  $ISCCT \le 5$  kA rms;
- Three colour Status Indicator with progressive indication of remaining performance.

Model L 13/40			230 ff 2
CODE			204 120
Nominal ac system voltage		Un	230 V ac
Modes of protection			3
Max Continuous Operating Voltage		Uc	335 V ac
Test Class according to IEC 61643-11 Ed.1 (2011-03)			I and II
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)			T1 and T2
Impulse discharge current (10/350 µs)		limp	13 kA
Charge		Q	6,5 As
Nominal discharge current (8/20 µs)		In	35 kA
Max. discharge current (8/20 μs)		Imax	70 kA
Voltage protection level at a discharge current of:	1 kA	Up	≤ 0,80 kV
	5 kA	Up	≤ 0,93 kV
	15 kA	Up	≤ 1,15 kV
	20 kA	Up	≤ 1,25 kV
	35 kA	Up	≤ 1,50 kV
Response time		ta	≤ 25 ns
End of Life			OCM (Open Circuit Failure Mode)
Behaviour in case of Temporary OverVoltage (TOV)		UT	440 V / 120 min, withstand (W)
Short Circuit Current rating without backup protection (internal disconnector)		Isccr	5 kA rms
Short Circuit Current rating with max. backup protection fuse		Isccr	100 kA rms
Max. back-up protection with up-stream CB with a max. let-through energy of			160 A (max. 4,50 x 10 <sup>5</sup> A <sup>2</sup> s)
(max. prospective short circuit current depends on the CB breaking capability)			
Max. back-up protection with FUSE at prospective short circuit currents of			$160/125 \text{ A qG}^* (> 5 \div 100 \text{ kA rms})$
Follow current interrupt rating		lfi	NFC No Follow Current®
Status indicator (indication of disconnector operation)			3 colours with progressive performance indication
Operating temperature range / Humidity			-40 +80 °C (extended) / 5% 95%
Terminal - Conductor size			4-35 mm² flexible / 4-50 mm² semi rigid
Mounting			indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715
Case material / Flammability grade			BMC / V-0 in accordance with UL 94
Pollution degree / Degree of protection		PD / IP	3 / 20 (built-in)
Approximate weight			385 g
Dimensions: width			35 mm (2 modules)
Certifications / Quality Mark			CB, STC issued by OVE / KEMA-KEUR

Model L 13/40 with remote signal contact	230 t ff 2
CODE	214 120
Remote signal contact	potential-free changeover contact
Terminal - conductor size for remote signal contact	max. 1,5 mm² flexible
Switching capacity remote signal contact	ac: 250 V / 0,5 A - dc: 125 V / 0,2 A; 75 V / 0,5 A























L 13/40 230 ff 3 is a ready to install assembly of three voltage limiting SPDs providing six modes of protection, typically installed at the origin of the installation, e.g. in the Main Distribution Board (MDB), for three-phase 230/400 V TN-systems, with the following features and benefits:

- T1 SPD and T2 SPD (Type 1 and Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- L 13/40 230 ff 3 is a voltage limiting SPD, for the protection of low voltage installations and equipment against direct and indirect lightning effects;
- Backup protection is not required with an upstream  $CB \le 160$  A or up to an  $ISCCT \le 5$  kA rms;
- Three colour Status Indicator with progressive indication of remaining performance.

Model L 13/40			230 ff 3
CODE			204 130
Nominal ac system voltage		Un	230/400 V ac
Modes of protection			6
Max Continuous Operating Voltage		Uc	335 V ac
Test Class according to IEC 61643-11 Ed.1 (2011-03)			I and II
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)			T1 and T2
Impulse discharge current (10/350 µs)		limp	13 kA
Charge		Q	6,5 As
Nominal discharge current (8/20 µs)		In	35 kA
Max. discharge current (8/20 µs)		Imax	70 kA
Voltage protection level at a discharge current of:	1 kA	Up	≤ 0,80 kV
	5 kA	Up	≤ 0,93 kV
	15 kA	Up	≤ 1,15 kV
	20 kA	Up	≤ 1,25 kV
	35 kA	Up	≤ 1,50 kV
Response time		ta	≤ 25 ns
End of Life			OCM (Open Circuit Failure Mode)
Behaviour in case of Temporary OverVoltage (TOV)		UT	440 V / 120 min, withstand (W)
Short Circuit Current rating without backup protection (internal disconnector)		Isccr	5 kA rms
Short Circuit Current rating with max. backup protection fuse		Isccr	100 kA rms
Max. back-up protection with up-stream CB with a max. let-through energy of			160 A (max. 4,50 x 10 <sup>5</sup> A <sup>2</sup> s)
(max. prospective short circuit current depends on the CB breaking capability)			
Max. back-up protection with FUSE at prospective short circuit currents of			$160/125 \text{ A gG}^* (> 5 \div 100 \text{ kA rms})$
Follow current interrupt rating		lfi	NFC No Follow Current®
Status indicator (indication of disconnector operation)			3 colours with progressive performance indication
Operating temperature range / Humidity			-40 +80 °C (extended) / 5% 95%
Terminal - Conductor size			4-35 mm² flexible / 4-50 mm² semi rigid
Mounting			indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715
Case material / Flammability grade			BMC / V-0 in accordance with UL 94
Pollution degree / Degree of protection		PD / IP	3 / 20 (built-in)
Approximate weight			590 g
Dimensions: width			53 mm (3 modules)
Certifications / Quality Mark			CB, STC issued by OVE / KEMA-KEUR

Model L 13/40 with remote signal contact	230 t ff 3	
CODE	214 130	
Remote signal contact	potential-free changeover co	ntact
Terminal - conductor size for remote signal contact	max. 1,5 mm² flexible	
Switching capacity remote signal contact	ac: 250 V / 0,5 A - dc: 125 V / 0,2 A;	75 V / 0,5 A


























L 13/40 230 ff 4 is a ready to install assembly of four voltage limiting SPDs providing ten modes of protection, typically installed at the origin of the installation, e.g. in the Main Distribution Board (MDB), for three-phase plus neutral 230/400 V TN-systems, with the following features and benefits:

- T1 SPD and T2 SPD (Type 1 and Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- L 13/40 230 ff 4 is a voltage limiting SPD, for the protection of low voltage installations and equipment against direct and indirect lightning effects;
- Backup protection is not required with an upstream  $CB \le 160$  A or up to an  $ISCCT \le 5$  kA rms;
- Three colour Status Indicator with progressive indication of remaining performance.

Model L 13/40			230 ff 4
CODE			204 140
Nominal ac system voltage		Un	230/400 V ac
Modes of protection			10
Max Continuous Operating Voltage		Uc	335 V ac
Test Class according to IEC 61643-11 Ed.1 (2011-03)			I and II
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)			T1 and T2
mpulse discharge current (10/350 μs)		limp	13 kA
Charge		Q	6,5 As
lominal discharge current (8/20 μs)		In	35 kA
Лах. discharge current (8/20 µs)		Imax	70 kA
Oltage protection level at a discharge current of:	1 kA	Up	≤ 0,80 kV
	5 kA	Up	≤ 0,93 kV
	15 kA	Up	≤ 1,15 kV
	20 kA	Up	≤ 1,25 kV
	35 kA	Up	≤ 1.50 kV
Response time		ta	≤ 25 ns
ind of Life			OCM (Open Circuit Failure Mode)
Behaviour in case of Temporary OverVoltage (TOV)		UT	440 V / 120 min, withstand (W)
Short Circuit Current rating without backup protection (internal disconnector)		Isccr	5 kA rms
hort Circuit Current rating with max. backup protection fuse		Isccr	100 kA rms
Max. back-up protection with up-stream CB with a max. let-through energy of			160 A (max. 4,50 x 10 <sup>5</sup> A <sup>2</sup> s)
max. prospective short circuit current depends on the CB breaking capability)			
Max. back-up protection with FUSE at prospective short circuit currents of			$160/125 \text{ A gG}^* (> 5 \div 100 \text{ kA rms})$
ollow current interrupt rating		lfi	NFC No Follow Current®
tatus indicator (indication of disconnector operation)			3 colours with progressive performance indication
perating temperature range / Humidity			-40 +80 °C (extended) / 5% 95%
erminal - Conductor size			4-35 mm² flexible / 4-50 mm² semi rigid
<b>N</b> ounting			indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715
ase material / Flammability grade			BMC / V-0 in accordance with UL 94
ollution degree / Degree of protection		PD / IP	3 / 20 (built-in)
pproximate weight			780 g
Dimensions: width			70 mm (4 modules)
Certifications / Quality Mark			CB, STC issued by OVE / KEMA-KEUR

### Model L 13/40 ... with remote signal contact

Model L 13/40 with remote signal contact	230 t ff 4
CODE	214 140
Remote signal contact	potential-free changeover contact
Terminal - conductor size for remote signal contact	max. 1,5 mm² flexible
Switching capacity remote signal contact	ac: 250 V / 0,5 A - dc: 125 V / 0,2 A; 75 V / 0,5 A
























L 13/40 230 ff 1+1 is a ready to install assembly of a voltage limiting and a voltage switching SPD providing three modes of protection, typically installed in single-phase 230 V TT-systems where connection type CT2 (1+1) is required according to HD 60364-5-53, e.g. in the service entrance board (SEB), with the following features and benefits:

- T1 SPD and T2 SPD (Type 1 and Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- Backup protection is not required with an upstream  $CB \le 160 \text{ A}$  or up to an  $ISCCT \le 5 \text{ kA rms}$ ;
- Three colour Status Indicator with progressive indication of remaining performance.

Model L 13/40 ... 230 ff 1+1

CODE		204	121		
Nominal ac system voltage	Un	230 V ac			
Modes of protection		3			
Max Continuous Operating Voltage (L-N)	Uc	335 \	/ ac		
Max Continuous Operating Voltage (N-PE)	Uc	255 \	/ ac		
Test Class according to IEC 61643-11 Ed.1 (2011-03)		I an	d II		
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)		T1 an	230 V ac 3 335 V ac 255 V ac I and II T1 and T2 13 kA 52 kA 6,5 As 26 As 35 kA 52 kA 70 kA  ≤ 0,80 kV ≤ 0,93 kV ≤ 1,50 kV ≤ 1,50 kV ≤ 1,50 kV		
Impulse discharge current (10/350 µs) (L-N)	limp	13	kA		
Impulse discharge current (10/350 µs) (N-PE)	limp	52	kA		
Charge (L-N)	Q	6,5	As		
Charge (N-PE)	Q	26	As		
Nominal discharge current (8/20 µs) (L-N)	In	35	kA		
Nominal discharge current (8/20 µs) (N-PE)	In	52	kA		
Max. discharge current (8/20 μs) (L-N) and (N-PE)	Imax	70	kA		
Voltage protection level (L-N, L-PE) at a discharge current of:	1 kA Up	≤ 0,80 kV	≤ 1,50 kV		
	kA Up	≤ 0,93 kV	≤ 1,50 kV		
15	kA Up	≤ 1,15 kV	≤ 1,50 kV		
20	) kA Up	≤ 1,25 kV	≤ 1,50 kV		
35	kA Up	≤ 1,50 kV	≤ 1,50 kV		
Voltage protection level (N-PE)	Up				
Response time (L-N / N-PE)	ta	≤ 25 ns / ≤ 100 ns			
End of Life (L-N)		OCM (Open Circu	it Failure Mode)		
Behaviour in case of Temporary OverVoltage (TOV):	-N UT	440 V / 120 min	, withstand (W)		
N	I-PE UT	1200 V / 200 ms	s, withstand (W)		
Short Circuit Current rating without backup protection (internal disconnector)	Isccr	5 kA	rms		
Short Circuit Current rating with max. backup protection fuse	Isccr	100 k/	A rms		
Max. back-up protection with up-stream CB with a max. let-through energy of		160 A (max. 4,	,50 x 10 <sup>5</sup> A <sup>2</sup> s)		
(max. prospective short circuit current depends on the CB breaking capability)					
Max. back-up protection with FUSE at prospective short circuit currents of		160/125 A gG* (>	5 ÷ 100 kA rms)		
Follow current interrupt rating (L-N)	lfi	NFC No Folio	w Current®		
Follow current interrupt rating (N-PE)	lfi	100 A	rms		
Status indicator (indication of disconnector operation) / N-PE (no disconnector)		3 colours with progressive performa	nce indication / 2 colours for N-PE		
Operating temperature range / Humidity		-40 +80 °C (exte	nded) / 5% 95%		
Terminal - Conductor size					
Mounting		·			
Case material / Flammability grade					
Pollution degree / Degree of protection	PD / I				
Approximate weight			-		
Dimensions: width		35 mm (2	,		
Certifications / Quality Mark		CB, STC issued by	UVE / KEMA-KEUK		

### Model I 13/40 ... with remote signal contact

Model L 13/40 With remote signal contact	230 (11 1+1
CODE	214 121
Remote signal contact	potential-free changeover contact
Terminal - conductor size for remote signal contact	max. 1,5 mm² flexible
Switching capacity remote signal contact	ac: 250 V / 0,5 A - dc: 125 V / 0,2 A; 75 V / 0,5 A
























L 13/40 230 ff 3+1 is a ready to install assembly of three voltage limiting and a voltage switching SPD providing ten modes of protection, typically installed in three-phase plus neutral 230/400 V TT-systems where connection type CT2 (3+1) is required according to HD 60364-5-53, e.g. in the service entrance board (SEB), with the following features and benefits:

- T1 SPD and T2 SPD (Type 1 and Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- Backup protection is not required with an upstream CB  $\leq$  160 A or up to an Isccr  $\leq$  5 kA rms;
- Three colour Status Indicator with progressive indication of remaining performance.

Model L 13/40 ... 230 ff 3+1

Nominal ac system voltage   Uii   230/400 V ac	CODE		204 141				
Max Continuous Operating Voltage (L-N)         Uc         335 V ac           Max Continuous Operating Voltage (N-PE)         Uc         255 V ac           Test Class according to IEC 61643-11 Ed. 1 (2011-03)         I and II           Type according to IEC 61643-11 Ed. 2 (2025) and EN IEC 61643-11 (2025)         T1 and T2           Impulse discharge current (10/350 µs) (N-PE)         Imp         35 kA           Charge (I-N)         Q         6,5 As           Charge (N-PE)         Q         2,6 As           Nominal discharge current (8/20 µs) (I-NP)         In         35 kA           Nominal discharge current (8/20 µs) (I-PE)         In         52 kA           Max. discharge current (8/20 µs) (I-PE)         In         52 kA           Voltage protection level (I-N, I-PE) at a discharge current of:         1 kA         Up         ≤ 0,80 kV         ≤ 1,50 kV           15 kA         Up         ≤ 0,93 kV         ≤ 1,50 kV         ≤ 1,50 kV           20 kA         Up         ≤ 1,50 kV         ≤ 1,50 kV           Voltage protection level (N-PE)         ta         ≤ 2,5 ns / ≤ 100 ns           Behaviour in case of Temporary OverVoltage (TOV):         L-N         VPE         1         1,50 kV         ≤ 1,50 kV	Nominal ac system voltage	Un					
Max Continuous Operating Voltage (N-PE) Test Class according to IEC 61643-11 Ed. (2021) and EN IEC 61643-11 (2025)  Impulse discharge current (10/350 µs) (N-PE) Impulse discharge current (8/20 µs) (N-PE) Impulse (N-PE) Impuls	Modes of protection		10				
Test Class according to IEC 61643-11 Ed.1 (2011-03)	Max Continuous Operating Voltage (L-N)	Uc	335	V ac			
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)  Impulse discharge current (10/350 µs) (N-PE)  Impulse discharge current (10/350 µs) (N-PE)  Charge (L-N)  Charge (N-PE)  O  2 26 As  Nominal discharge current (8/20 µs) (N-PE)  In  35 kA  Nominal discharge current (8/20 µs) (N-PE)  In  52 kA  Nominal discharge current (8/20 µs) (N-PE)  In  53 kA  Nominal discharge current (8/20 µs) (N-PE)  In  54 kA  Nominal discharge current (8/20 µs) (N-PE)  In  55 kA  Nominal discharge current (8/20 µs) (N-PE)  In  56 kA  Nominal discharge current (8/20 µs) (N-PE)  In  57 kA  Voltage protection level (L-N, L-PE) at a discharge current of:  18 kA  19 ≤ 0,80 kV  11,50 kV  15 kA  10 ≤ 1,50 kV  15 kA  10 √ 1,50 kV  15 kA  10 √ 1,50 kV  15 kA  10 √ 1,50 kV  10 karrent (R-N/N-PE)  10 √ 1,50 kV  10 karrent (R-N/N-PE)  10 √ 1,50 kV  100 karrent (R-N/N-PE)  10 √ 1,50 kV  10 karrent (R-N/N-PE)  10 √ 1,50 kV  10 karrent (R-N/N-PE)  10 √ 1,50 kV  10 karrent (R-N/N-PE)  10 karrent (R-N/	Max Continuous Operating Voltage (N-PE)	Uc	255	V ac			
Impulse discharge current (10/350 µs) (L-N)   Imp   52 kA	Test Class according to IEC 61643-11 Ed.1 (2011-03)		I a	nd II			
Impulse discharge current (10/350 µs) (N-PE)	Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)		T1 a	nd T2			
Charge (L-N) Charge (N-PE) Q Q 26 As Nominal discharge current (8/20 µs) (L-N) Nominal discharge current (8/20 µs) (L-N) Nominal discharge current (8/20 µs) (L-N) and (N-PE) In S2 kA Max. discharge current (8/20 µs) (L-N) and (N-PE) In S2 kA Woltage protection level (L-N, L-PE) at a discharge current of: 1 kA Up S15 kA Up S15 kA Up S1,50 kV S15 kA Up S1,50 kV	Impulse discharge current (10/350 μs) (L-N)	limp	13	kA .			
Charge (N-PE)	Impulse discharge current (10/350 μs) (N-PE)	limp	52	! kA			
Nominal discharge current (8/20 µs) (L-N)   In	Charge (L-N)	Q	6,5	5 As			
Nominal discharge current (8/20 µs) (N-PE)	Charge (N-PE)	Q	26	6 As			
Nominal discharge current (8/20 µs) (N-PE)	Nominal discharge current (8/20 µs) (L-N)	In	35	kA			
Max. discharge current (8/20 μs) (L-N) and (N-PE)         Imax         70 kA           Voltage protection level (L-N, L-PE) at a discharge current of:         1 kA         Up         ≤ 0,80 kV         ≤ 1,50 kV           15 kA         Up         ≤ 0,93 kV         ≤ 1,50 kV         ≤ 1,50 kV           20 kA         Up         ≤ 1,50 kV         ≤ 1,50 kV           40 kB         Up         ≤ 1,50 kV         ≤ 1,50 kV           Voltage protection level (N-PE)         4a         ≤ 25 ns / ≤ 100 ns           End of Life (L-N)         b         0CM (Open Circuit Failure Mode)           Behaviour in case of Temporary OverVoltage (TOV):         L-N         UT         440 V / 120 min, withstand (W)           Short Circuit Current rating without backup protection (internal disconnector)         lsccr         5 kA rms           Short Circuit Current rating with max. backup protection fuse         lsccr         100 kA rms           Max. back-up protection with up-stream CB with a max. let-through energy of (max. prospective short circuit current depends on the CB breaking capability)         125 A (max. 4,50 x 10° A°s)           Max. back-up protection with FUSE at prospective short circuit currents of Follow current interrupt rating (L-N)         In         NFC No Follow Current®           Follow current interrupt rating (I-N)         In         NFC No Follow Current®         100 A rms		In	52	! kA			
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$		Imax	70	kA			
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	Voltage protection level (L-N, L-PE) at a discharge current of:	kA Up	≤ 0,80 kV	≤ 1,50 kV			
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	5	kA Up	≤ 0,93 kV	≤ 1,50 kV			
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	15	kA Up	≤ 1,15 kV	≤ 1,50 kV			
Voltage protection level (N-PE)   Up   ≤ 1,50 kV   ≤ 1,50 kV	20	kA Un		≤ 1.50 kV			
Voltage protection level (N-PE)		- 1	the state of the s	· · · · · · · · · · · · · · · · · · ·			
Response time (L-N / N-PE)  End of Life (L-N)  Behaviour in case of Temporary OverVoltage (TOV):  L-N  N-PE  UT  1200 V / 200 ms, withstand (W)  Short Circuit Current rating without backup protection (internal disconnector)  Short Circuit Current rating with max. backup protection fuse  Max. back-up protection with up-stream CB with a max. let-through energy of (max. prospective short circuit current depends on the CB breaking capability)  Max. back-up protection with FUSE at prospective short circuit currents of  Follow current interrupt rating (L-N)  Follow current interrupt rating (N-PE)  Status indicator (indication of disconnector operation) / N-PE (no disconnector)  Operating temperature range / Humidity  Follow current interrupt rating (L-N)  Follow current interrupt rating (N-PE)  Status indicator (indication of disconnector operation) / N-PE (no disconnector)  Operating temperature range / Humidity  -40 +80 °C (extended) / 5% 95%  Terminal - Conductor size  Mounting  Mounting  BMC /V-0 in accordance with UL 94  Pollution degree / Degree of protection  PD / IP  3 / 20 (built-in)  Approximate weight  735 g  Dimensions: width		- 1	· · · · · · · · · · · · · · · · · · ·				
End of Life (L-N)  Behaviour in case of Temporary OverVoltage (TOV):  L-N N-PE  Short Circuit Current rating without backup protection (internal disconnector)  Short Circuit Current rating with max. backup protection fuse  Max. back-up protection with up-stream CB with a max. let-through energy of (max. prospective short circuit current depends on the CB breaking capability)  Max. back-up protection with FUSE at prospective short circuit currents of  Follow current interrupt rating (N-PE)  Status indicator (indication of disconnector operation) / N-PE (no disconnector)  Operating temperature range / Humidity  Terminal - Conductor size  Mounting  Signal Approximate weight  PD / IP  3 / 20 (built-in)  OCM (Open Circuit Eailure Mode)  440 V / 120 min, withstand (W)  120 V / 200 ms, withstand (W)  120 V / 200 Ms / 2	· ,						
N-PE UT 1200 V / 200 ms, withstand (W)  Short Circuit Current rating without backup protection (internal disconnector)  Short Circuit Current rating with max. backup protection fuse  Max. back-up protection with up-stream CB with a max. let-through energy of (max. prospective short circuit current depends on the CB breaking capability)  Max. back-up protection with FUSE at prospective short circuit currents of  Follow current interrupt rating (L-N)  Follow current interrupt rating (N-PE)  Status indicator (indication of disconnector operation) / N-PE (no disconnector)  Operating temperature range / Humidity  Terminal - Conductor size  Mounting  Case material / Flammability grade  Pollution degree / Degree of protection  Approximate weight  Dimensions: width  Tase  Table 100 Ka rms  100 k	End of Life (L-N)		OCM (Open Circ	uit Failure Mode)			
Short Circuit Current rating without backup protection (internal disconnector) Short Circuit Current rating with max. backup protection fuse  Max. back-up protection with up-stream CB with a max. let-through energy of (max. prospective short circuit current depends on the CB breaking capability) Max. back-up protection with FUSE at prospective short circuit currents of Follow current interrupt rating (L-N) Follow current interrupt rating (N-PE) Status indicator (indication of disconnector operation) / N-PE (no disconnector) Operating temperature range / Humidity Ferminal - Conductor size Mounting Mounting Mounting Mounting  Case material / Flammability grade Pollution degree / Degree of protection Approximate weight Dimensions: width  Ska rms  125 A (max. 4,50 x 10 <sup>5</sup> A²s)  125 A (max. 4,50 x 10 <sup>5</sup> A²s)  125 A (max. 4,50 x 10 <sup>5</sup> A²s)  126 A (max. 4,50 x 10 <sup>5</sup> A²s)  127 A (max. 4,50 x 10 <sup>5</sup> A²s)  128 A (max. 4,50 x 10 <sup>5</sup> A²s)  129 A (max. 4,50 x 10 <sup>5</sup> A²s)  120 A rms  120 A rms  3 colours with progressive performance indication / 2 colours for N-PE  4-35 mm² flexible / 4-50 mm² semi rigid  127 A mm (4 modules)	Behaviour in case of Temporary OverVoltage (TOV):	-N UT	440 V / 120 mi	n, withstand (W)			
Short Circuit Current rating with max. backup protection fuse  Max. back-up protection with up-stream CB with a max. let-through energy of (max. prospective short circuit current depends on the CB breaking capability)  Max. back-up protection with FUSE at prospective short circuit currents of  Follow current interrupt rating (L-N)  Follow current interrupt rating (N-PE)  Status indicator (indication of disconnector operation) / N-PE (no disconnector)  Operating temperature range / Humidity  Ferminal - Conductor size  Mounting  Mounting  Case material / Flammability grade  Pollution degree / Degree of protection  Approximate weight  Dimensions: width	N	-PE UT	1200 V / 200 m	is, withstand (W)			
Max. back-up protection with up-stream CB with a max. let-through energy of (max. prospective short circuit current depends on the CB breaking capability)  Max. back-up protection with FUSE at prospective short circuit currents of  Follow current interrupt rating (L-N)  Follow current interrupt rating (N-PE)  Status indicator (indication of disconnector operation) / N-PE (no disconnector)  Operating temperature range / Humidity  Terminal - Conductor size  Mounting  Mounting  Case material / Flammability grade  Pollution degree / Degree of protection  Approximate weight  Dimensions: width  125 A (max. 4,50 x 10 <sup>5</sup> A <sup>2</sup> s)  160/125 A gG* (> 5 ÷ 100 kA rms)  160/125 A gG* (¬ 5 ÷ 100 kA rms)  160/125 A gG* (¬ 5 ÷ 100 kA rms)  160/125 A gG* (¬ 5 ÷ 100 kA rms)  160/125 A gG* (¬ 5 ÷ 10	Short Circuit Current rating without backup protection (internal disconnector)	Isccr	5 k/	Arms			
Max. back-up protection with up-stream CB with a max. let-through energy of (max. prospective short circuit current depends on the CB breaking capability)  Max. back-up protection with FUSE at prospective short circuit currents of  Follow current interrupt rating (L-N)  Follow current interrupt rating (N-PE)  Status indicator (indication of disconnector operation) / N-PE (no disconnector)  Operating temperature range / Humidity  Terminal - Conductor size  Mounting  Mounting  Case material / Flammability grade  Pollution degree / Degree of protection  Approximate weight  Dimensions: width  125 A (max. 4,50 x 10 <sup>5</sup> A <sup>2</sup> s)  166/125 A gG* (> 5 ÷ 100 kA rms)  167  NFC No Follow Current®  168  160/125 A gG* (> 5 ÷ 100 kA rms)  169  160/125 A gG* (> 5 ÷ 100 kA rms)  160/125 A gG* (¬ 5 ÷ 100 kA rms)  160/125 A gG* (¬ 5 ÷ 100 kA rms)  160/125 A gG* (¬ 5 ÷ 100 kA rms)  160/125 A gG* (¬ 5	Short Circuit Current rating with max. backup protection fuse	Isccr	100 k	A rms			
Max. back-up protection with FUSE at prospective short circuit currents of  Follow current interrupt rating (L-N)  Follow current interrupt rating (N-PE)  Status indicator (indication of disconnector operation) / N-PE (no disconnector)  Operating temperature range / Humidity  Terminal - Conductor size  Mounting  Mounting  Case material / Flammability grade  Pollution degree / Degree of protection  Approximate weight  Dimensions: width  160/125 A gG* ⟨ > 5 ÷ 100 kA rms⟩  NFC No Follow Current®  160/125 A gG* ⟨ > 5 ÷ 100 kA rms⟩  NFC No Follow Current®  100 A rms  100 A rms  3 colours with progressive performance indication / 2 colours for N-PE  4 - 30 °C (extended) / 5% 95%  4 - 35 mm² flexible / 4 - 50 mm² semi rigid  indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715  BMC / V-0 in accordance with UL 94  PD / IP  3 / 20 (built-in)  735 g  Dimensions: width		f	125 A (max. 4	4,50 x 10 <sup>5</sup> A <sup>2</sup> s)			
Follow current interrupt rating (L-N) Follow current interrupt rating (N-PE) Ifi  100 A rms  Status indicator (indication of disconnector operation) / N-PE (no disconnector) Operating temperature range / Humidity  Terminal - Conductor size  Mounting  Mounting  Case material / Flammability grade Pollution degree / Degree of protection Approximate weight  Dimensions: width  NFC No Follow Current®  100 A rms  3 colours with progressive performance indication / 2 colours for N-PE  3 colours with progressive performance indication / 2 colours for N-PE  4-40 +80 °C (extended) / 5% 95%  4-35 mm² flexible / 4-50 mm² semi rigid  indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715  BMC / V-0 in accordance with UL 94  PD / IP  3 / 20 (built-in)  735 g  Dimensions: width	(max. prospective short circuit current depends on the CB breaking capability)						
Follow current interrupt rating (L-N) Follow current interrupt rating (N-PE)  Ifi  100 A rms  Status indicator (indication of disconnector operation) / N-PE (no disconnector)  Operating temperature range / Humidity  Terminal - Conductor size  Mounting  Mounting  Case material / Flammability grade  Pollution degree / Degree of protection  Approximate weight  Dimensions: width  NFC No Follow Current®  100 A rms  3 colours with progressive performance indication / 2 colours for N-PE  3 colours with progressive performance indication / 2 colours for N-PE  4-40 +80 °C (extended) / 5% 95%  4-35 mm² flexible / 4-50 mm² semi rigid  indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715  BMC / V-0 in accordance with UL 94  PD / IP  3 / 20 (built-in)  735 g  Dimensions: width	Max. back-up protection with FUSE at prospective short circuit currents of		160/125 A gG* (>	> 5 ÷ 100 kA rms)			
Follow current interrupt rating (N-PE)  Status indicator (indication of disconnector operation) / N-PE (no disconnector)  Operating temperature range / Humidity  Terminal - Conductor size  Mounting  Mounting  Case material / Flammability grade  Pollution degree / Degree of protection  Approximate weight  Dimensions: width  100 A rms  100 A		lfi		,			
Status indicator (indication of disconnector operation) / N-PE (no disconnector)  Operating temperature range / Humidity  Terminal - Conductor size  Mounting  Mounting  Case material / Flammability grade  Pollution degree / Degree of protection  Approximate weight  Dimensions: width  S colours with progressive performance indication / 2 colours for N-PE  3 colours with progressive performance indication / 2 colours for N-PE  4-30 mm² flexible / 4-50 mm² semi rigid  indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715  BMC / V-0 in accordance with UL 94  PD / IP  3 / 20 (built-in)  735 g  Dimensions: width	,	lfi	100	A rms			
Terminal - Conductor size  4-35 mm² flexible / 4-50 mm² semi rigid  Mounting  indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715  Case material / Flammability grade  Pollution degree / Degree of protection  Approximate weight  Dimensions: width  4-35 mm² flexible / 4-50 mm² semi rigid  indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715  BMC / V-0 in accordance with UL 94  PD / IP  3 / 20 (built-in)  735 g  70 mm (4 modules)	1 0 ( )		3 colours with progressive perform	ance indication / 2 colours for N-PE			
Mounting indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715  Case material / Flammability grade BMC / V-0 in accordance with UL 94  Pollution degree / Degree of protection PD / IP 3 / 20 (built-in)  Approximate weight 735 g  Dimensions: width 70 mm (4 modules)	Operating temperature range / Humidity		-40 +80 °C (ext	rended) / 5% 95%			
Case material / Flammability grade     BMC / V-0 in accordance with UL 94       Pollution degree / Degree of protection     PD / IP       Approximate weight     735 g       Dimensions: width     70 mm (4 modules)	Terminal - Conductor size		4-35 mm <sup>2</sup> flexible /	4-50 mm <sup>2</sup> semi rigid			
Pollution degree / Degree of protectionPD / IP3 / 20 (built-in)Approximate weight735 gDimensions: width70 mm (4 modules)	Mounting		indoor, 35 x 7,5 mm top	hat DIN rail IEC/EN 60715			
Pollution degree / Degree of protection PD / IP 3 / 20 (built-in)  Approximate weight 735 g  Dimensions: width 70 mm (4 modules)	Case material / Flammability grade		BMC / V-0 in acco	ordance with UL 94			
Dimensions: width 70 mm (4 modules)		PD / II	3 / 20	(built-in)			
	Approximate weight		• • •				
Certifications / Quality Mark  CB, STC issued by OVE / KEMA-KEUR	Dimensions: width		70 mm (4	1 modules)			
	Certifications / Quality Mark	CB, STC issued by OVE / KEMA					

### Model L 13/40 ... with remote signal contact

230 t ff 3+1

Model E 10/10 III Willi Telliote digital contact	200 til 011
CODE	214 141
Remote signal contact	potential-free changeover contact
Terminal - conductor size for remote signal contact	max. 1,5 mm² flexible
Switching capacity remote signal contact	ac: 250 V / 0.5 A – dc: 125 V / 0.2 A: 75 V / 0.5 A

























I 52 N-PE is a voltage switching SPD providing a single mode of protection, typically installed in TT-systems between neutral conductor N and protective earth PE, where connection type CT2 (1+1 or 3+1) is required according to HD 60364-5-53, with the following features and benefits:

- T1 SPD and T2 SPD (Type 1 and Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- I 52 N-PE is a Gas Discharge Tube (GDT) based SPD, for the protection of low voltage installations and equipment against direct and indirect lightning effects;
- Impulse discharge current of 52 kA 10/350 μs;
- Nominal discharge current of 52 kA 8/20 μs;
- The special housing is designed for "Pollution Degree 3";
- To be combined with L 25/100 230 ff or IA 25 230 for single-phase 230 V TT-systems and with L 13/40 230 ff or L 7/30 230 ff for single-phase and three-phase plus neutral 230/400 V TT-systems.

### Model I 52 N-PE

CODE		206 300
Nominal ac system voltage	Un	230 V ac
Modes of protection		1
Max Continuous Operating Voltage	Uc	255 V ac
Test Class according to IEC 61643-11 Ed.1 (2011-03)		I and II
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)		T1 and T2
Impulse discharge current (10/350 μs)	limp	52 kA
Charge	Q	26 As
Nominal discharge current (8/20 µs)	In	52 kA
Max. discharge curret (8/20 μs)	Imax	70 kA
Follow current interrupt rating	lfi	100 A rms
Voltage protection level	Up	≤ 1,50 kV
Response time	ta	≤ 100 ns
Behaviour in case of Temporary Overvoltage (TOV)	UT	1200 V / 200 ms, withstand (W)
Operating temperature range / Humidity		-40 +80 °C (extended) / 5% 95%
Terminal-Conductor size		4-35 mm² flexible / 4-50 mm² semi rigid
Busbar connections		fork-type busbar 16 mm²
Mounting		indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715
Case material / Flammability grade		BMC / V-0 in accordance with UL 94
Pollution degree / Degree of protection	PD / IP	3 / 20 (built-in)
Approximate weight		130 g
Dimensions: width		17,5 mm (1 module)
In bundle with		L 13/40 230 ff and L 7/30 230 ff
Certifications / Quality Mark		CB, STC issued by OVE / KEMA-KEUR

Model I 52 N-PE t with remote signal contact

CODE	216 300
Remote signal contact	potential-free changeover contact
Terminal - conductor size for remote signal contact	max. 1,5 mm² flexible
Switching capacity	ac: 250 V / 0,5 A – dc: 125 V / 0,2 A; 75 V / 0,5 A



























Protection Box ...

These Protection Boxes with an IP65 enclosure provide a compact and preinstalled solution for applications in Power Centers, when there is no remaining space in existing distribution boards, for outdoor applications as well as for line termination at or close to the origin of the installation where the lines may be subject to direct lightning strikes. They are available as:

- TN 40 ff with four voltage limiting SPDs (four modes of protection), for three-phase plus neutral 230/400 V TN-systems;
- TT 40 ff with three voltage limiting and a voltage switching SPD (four modes of protection), for three-phase plus neutral 230/400 V TT-systems where connection type CT2 (3+1) is required according to HD 60364-5-53.

They provide the following features and benefits:

- T1 SPD and T2 SPD (Type 1 and Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- They are suitable for installation at zone boundaries up to  $0_A 2$  according to the lightning protection zones concept as defined in EN IEC 62305.

Model Protection Box		TN 40 ff	TT 40	ff	
CODE		244 100	244 100 245 10		
Nominal ac system voltage	Un	,			
Modes of protection			10		
Max Continuous Operating Voltage	Uc	335 V ac	-		
Max Continuous Operating Voltage (L-N, L-PE)	Uc	-	335 V ac	255 V ac	
Test Class according to IEC 61643-11 Ed.1 (2011-03)		I a	nd II		
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)		T1 a	nd T2	nd T2	
Impulse discharge current (10/350 μs) (L-N, L-PE)	limp	5 kA 10 kA		Ą	
Impulse discharge current (10/350 μs) (N-PE)	limp	5 kA	100 k	A	
Charge (L-N, L-PE)	Q	10 As	5 As		
Charge (N-PE)	Q	10 As	50 As	3	
Nominal discharge current (8/20 µs) (L-N, L-PE)	In	40 kA	40 k/	4	
Nominal discharge current (8/20 µs) (N-PE)	In	40 kA	100 k	A	
Max. discharge current (8/20 μs) (L-N, L-PE)	Imax	40 kA	40 kA	4	
Max. discharge current (8/20 μs) (N-PE)	Imax	40 kA	100 k	A	
Voltage protection level at a discharge current of:		(L-PE)	(L-N)	(L-PE)	
11	A Up	≤ 0,75 kV	≤ 0,75 kV	≤ 1,50 k\	
5	A Up	≤ 0,85 kV	≤ 0,85 kV	≤ 1,50 k\	
10 k	A Up	≤ 1,00 kV	≤ 1,00 kV	≤ 1,50 k\	
20 k	A Up	≤ 1,15 kV	≤ 1,15 kV	≤ 1,50 k\	
40 k	- 1	≤ 1.50 kV	≤ 1,50 kV	≤ 1,50 k\	
Voltage protection level (N-PE)	Un	≤ 1.50 kV	≤ 1.50		
Response time (L-N , L-PE / N-PE)	ta	≤ 25 ns ≤ 25 ns / ≤ 100 r		100 ns	
End of Life		OCM (Open Circ	cuit Failure Mode)		
Behaviour in case of Temporary Overvoltage (TOV):	N UT	440 V / 120 min, withstand (W)	,	withstand (W)	
N-I	Е Ит	440 V / 120 min, withstand (W)	1200 V / 200 ms,	, ,	
Max. back-up protection with fuse (L)		125 A gG (incorporated)			
Short circuit current rating with max. back-up protection	Isccr		A rms		
Follow current interrupt rating (L-N)	lfi	NFC No Follow Current®	NFC No Follow	/ Current®	
Follow current interrupt rating (N-PE)	lfi	NFC No Follow Current®	100 A r		
Operating temperature range / Humidity	- "		•	IIIO	
Ferminal-Conductor size		-40 +80 °C (extended) / 5% 95% 16 mm² flexible			
		2460 q			
Approximate weight Size			0		
Degree of protection	IP	I 300 x h 400 x d 140 mm 65 (enclosure)			
Remote signal contact	"		ver contact		
Terminal - conductor size for remote signal contact		Ŭ	nm² flexible		
•		ac: 250 V / 0,5 A - dc:		0.5.4	
Switching capacity remote signal contact		ac: 250 v / 0,5 A - dc:	125 V / U,Z A; /5 V / I	J,5 A	


























L 7/30 ...

L 7/30 ... ff is a voltage limiting SPD providing a single mode of protection, typically installed at the origin of the installation, e.g. in the Main Distribution Board (MDB), in TN-systems or in TT-systems in combination with N-PE SPD model I 100, I 52 and with connection type CT2 (3+1 or 1+1). Additional models are also available for the protection of wind turbines. It provides the following features and benefits:

- T1 SPD and T2 SPD (Type 1 and Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- Backup protection is not required with an upstream CB ≤ 160 A or up to an Isccr ≤ 5 kA rms (for U<sub>N</sub> 230/400 V);
- Three colour Status Indicator with progressive indication of remaining performance.

Model L 7/30   230 ff   400 ff   500 ff   750 ff   1000 ff   207 107					Mini Wind Turbines	Wind Turbines		
Mominal ac system voltage	Model L 7/30		230 ff	400 ff	600 ff	750 ff	1000 ff	
Modes of protection	CODE		207 100	207 104	207 106	207 107	207 110	
Max Continuous Operating Voltage   Use   335 V ac   460 V ac   690 V ac   750 V ac   1000 V ac   15st Class according to IEC 61643-11 Ed.1 (2011-03)   179pe according to IEC 61643-11 Ed.2 and EN IEC 61643-11 (2025)   189pu according to IEC 61643-11 Ed.2 and EN IEC 61643-11 (2025)   189pu according to IEC 61643-11 Ed.2 and EN IEC 61643-11 (2025)   189pu according to IEC 61643-11 Ed.2 and EN IEC 61643-11 (2025)   189pu according to IEC 61643-11 Ed.2 and EN IEC 61643-11 (2025)   189pu according to IEC 61643-11 Ed.2 and EN IEC 61643-11 (2025)   189pu according to IEC 61643-11 Ed.2 and EN IEC 61643-11 (2025)   189pu according to IEC 61643-11 Ed.2 and EN IEC 61643-11 (2025)   189pu according to IEC 61643-11 Ed.2 and EN IEC 61643-11 (2025)   189pu according to IEC 61643-11 Ed.2 and EN IEC 61643-11 (2025)   189pu according to IEC 61643-11 Ed.2 and EN IEC 61643-11 (2025)   189pu according to IEC 61643-11 Ed.2 and EN IEC 61643-11 (2025)   189pu according to IEC 61643-11 Ed.2 and EN IEC 61643-11 (2025)   189pu according to IEC 61643-11 (2025)   189pu acco	Nominal ac system voltage	Un	230/400 V ac	400/690 V ac	480/830 V ac	554/960 V ac	554/960 V ac	
Tigst Class according to IEC 6 1643-11 Ed.1 (2011-03)	Modes of protection				1			
Type according to IEC 61643-11 Ed.2 and EN IEC 61643-11 (2025)   Impulse discharge current (10/350 µs)   Impulse discharge current (10/350 µs)   In Max. discharge current (10/250 µs)   In Max. discharge (10/250 µs)   In Max. discharge current (10/250 µs)   In Max. discharge (10/250 µs)   In Max. di	Max Continuous Operating Voltage	Uc	335 V ac	460 V ac	690 V ac	750 V ac	1000 V ac	
Impulse discharge current (10/350 µs)	Test Class according to IEC 61643-11 Ed.1 (2011-03)				I and II			
Charge	Type according to IEC 61643-11 Ed.2 and EN IEC 61643-11 (2025)							
Naminal discharge current (8/20 µs)	Impulse discharge current (10/350 µs)	limp	8 kA	7 kA	5	kA	2 kA	
Max	Charge	Q	4,0 As	3,5 As	2,	5 As	1 As	
Voltage protection level at a discharge current of:	Nominal discharge current (8/20 µs)	In	30	kA	25 kA	20 kA	20 kA	
S kA   Up	Max. discharge current (8/20 µs)	Imax			40 kA			
15 kA   Up   \$1,30 kV   \$2,72 kV   \$2,75 kV   \$4,20 kV   \$2,75 kV   \$2,86 k	Voltage protection level at a discharge current of: 1 k	A Up	≤ 0,80 kV	≤ 1,20 kV	≤ 1,75 kV	≤ 1,85 kV	≤ 3,00 kV	
20 kA   Up   ≤1,35 kV   ≤1,95 kV   ≤2,80 kV   ≤2,85 kV   ≤4,40 kV   25,03 kV   ≤2,90 kV   − − − − − − − − − − − − − − − − − −	5 k	A Up	≤ 0,96 kV	≤ 1,46 kV	≤ 2,15 kV	≤ 2,25 kV	≤ 3,50 kV	
20 kA   Up   ≤1,35 kV   ≤1,95 kV   ≤2,80 kV   ≤2,85 kV   ≤4,40 kV   25,03 kV   ≤2,90 kV   − − − − − − − − − − − − − − − − − −	15 k	A Up	≤ 1.30 kV	≤ 1.90 kV	< 2.72 kV	≤ 2.75 kV	≤ 4.20 kV	
Second   Composition   Compo		- 1	,			, -	· · · · · · · · · · · · · · · · · · ·	
Response time			,	· ·	The state of the s	= 2,00 KV	= +,+0 KV	
Response time			,		≤ 2,30 KV			
End of Life   Sehaviour in case of Temporary OverVoltage (TOV)   5 s   UT   440 V, (W)   581 V, (W)   697 V, (W)   805 V, (W)   1452 V, (W)   withstand (W) / safe (S):   120 min   UT   440 V, (W)   797 V, (S)   915 V, (S)   1056 V, (S)   1930 V, (S)   Short Circuit Current rating without backup protection (internal disconnector)   Score   5 kA rms   3 kA rms   2 kA rms   100 kA		- 1	≥ 1,50 KV	≥ Z, I J KV	- 25 no	-	-	
Behaviour in case of Temporary OverVoltage (TOV)   5 s   UT   440 V, (W)   581 V, (W)   697 V, (W)   805 V, (W)   1452 V, (W)   withstand (W) / safe (S):   120 min   UT   440 V, (W)   797 V, (S)   915 V, (S)   1056 V, (S)   1930 V, (S)   Short Circuit Current rating without backup protection (internal disconnector)   Secr   5 kA rms   3 kA rms   2		Ld		OCM (O		Mode)		
withstand (W) / safe (S):  120 min  120 min  124		Пт	440 V (M)	( )		,	1452 V (M)	
Short Circuit Current rating without backup protection (internal disconnector) Short Circuit Current rating with max. backup protection fuse  Max. back-up protection with up-stream CB with max. let-through energy of (max. prospective short circuit current depends on CB breaking capability)  Max. back-up protection with FUSE at prospective short circuit current of  Max. back-up protection with FUSE at prospective short circuit current of  Max. back-up protection with FUSE at prospective short circuit current of  Max. back-up protection with FUSE at prospective short circuit current of  Max. back-up protection with FUSE at prospective short circuit current of  Max. back-up protection with FUSE at prospective short circuit current of  Max. back-up protection with FUSE at prospective short circuit current of  Max. back-up protection with FUSE at prospective short circuit current of  Max. back-up protection with FUSE at prospective short circuit current of  Max. back-up protection with FUSE at prospective short circuit current of  Max. back-up protection with FUSE at prospective short circuit current of  Max. back-up protection with FUSE at prospective short circuit current of  Max. back-up protection with FUSE at prospective short circuit current of  Max. back-up protection with FUSE at prospective short circuit current of  Max. back-up protection with FUSE at prospective short circuit current of  Max. back-up protection with FUSE at prospective short circuit current of  Max. back-up protection with FUSE at prospective short circuit current of  Max. back-up protection with FUSE at prospective short circuit current of  Max. back-up protection with FUSE at prospective short circuit current of  Max. back-up protection with FUSE at prospective short circuit current of  Max. back-up protection with FUSE at prospective short circuit current of  Max. back-up protection with FUSE at prospective short circuit current of  Max. back-up protection with FUSE at prospective short circuit current of  Max. back-up protection with			, , ,		,	, , ,	, , ,	
Short Circuit Current rating with max. backup protection fuse  Max. back-up protection with up-stream CB with max. let-through energy of (max. prospective short circuit current depends on CB breaking capability)  Max. back-up protection with FUSE at prospective short circuit current of (max.4,5x10° A²s)  Max. back-up protection with FUSE at prospective short circuit current of (max.4,5x10° A²s)  Is   NFC No Follow Current  NFC No Follow Current  Status indicator (indication of disconnector operation)  Operating temperature range / Humidity  Terminal - Conductor size  A-35 mm² flexible / 4-50 mm² semi rigid  Busbar connections  Mounting  Case material / Flammability grade  Pollution degree / Degree of protection  PD/IP  Model L 7/30 with remote signal contact  Cabe  Cabe  Caterial And Caterial Flammabile  Certifications / Quality Mark  Max. back-up protection with up-stream CB with max. let-through energy of (max.4,5x10° A²s)  160 A  160 A  160 A  160 A  125 A gG at  125 A gG	* / * /		, , ,	, , ,	, , ,	, , ,	, , ,	
Max. back-up protection with up-stream CB with max. let-through energy of (max. prospective short circuit current depends on CB breaking capability)  Max. back-up protection with FUSE at prospective short circuit current of (max.4,5x10° A°s)  Max. back-up protection with FUSE at prospective short circuit current of (max.4,5x10° A°s)  125 A gG at 125 A		*						
(max. prospective short circuit current depends on CB breaking capability)  Max. back-up protection with FUSE at prospective short circuit current of  (max.4,5x10 <sup>5</sup> A <sup>2</sup> s)  125 A gG at  (>5÷100 kA rms)  (>2÷100 kA rms)  (>2*100 kA rms)  (>2*10	0 11				TOU KA IIIIS	100 KA IIIIS	TOU KA IIIIS	
Max. back-up protection with FUSE at prospective short circuit current of (>5÷100 kA rms) (>3÷100 kA rms) (>2÷100 kA rms) (>2÷					-	-	-	
Spinor   S			, ,	, , ,	105 A = 0 = t	405 A =0 =1	100 4 - 14	
Follow current interrupt rating Status indicator (indication of disconnector operation) Operating temperature range / Humidity -40 +80 °C (extended) / 5% 95% Terminal - Conductor size 4-35 mm² flexible / 4-50 mm² semi rigid Busbar connections Mounting Mounting Status indicator (indication of disconnector operation) Operating temperature range / Humidity -40 +80 °C (extended) / 5% 95% Terminal - Conductor size 4-35 mm² flexible / 4-50 mm² semi rigid Busbar connections Mounting Status indicator (indication of disconnector indication)  Mounting Status indicator (indication of disconnection) Status indicator (extended) / 5% 95% Status indicator (extended) / 5% .	Max. back-up protection with FUSE at prospective short circuit current of			· ·		· ·		
Status indicator (indication of disconnector operation)  Operating temperature range / Humidity  -40 +80 °C (extended) / 5% 95%  Terminal - Conductor size  4-35 mm² flexible / 4-50 mm² semi rigid  Busbar connections  fork-type busbar 16 mm²  Mounting  indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715  Case material / Flammability grade  Pollution degree / Degree of protection  Approximate weight  Dimensions: width  Certifications / Quality Mark  Terminal - Conductor size  230 t ff  400 t ff  600 t ff  750 t ff  1000 t ff  CODE  Remote signal contact  Potential-free changeover contact  Terminal - conductor size for remote signal contact			(>5÷100 kA rms)	'	,	,	(>2÷100 kA rms)	
Operating temperature range / Humidity  -40 +80 °C (extended) / 5% 95%  Terminal - Conductor size  4-35 mm² flexible / 4-50 mm² semi rigid  Busbar connections  fork-type busbar 16 mm²  Mounting  indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715  Case material / Flammability grade  Pollution degree / Degree of protection  Approximate weight  Dimensions: width  Certifications / Quality Mark  To By Case material / Flammability grade  PD/IP  3 / 20 (built-in)  2 / 20 (built-in)  2 / 20 (built-in)  130 g  175 g  180 g  190 g  190 g  17,5 mm (1 module)  Certifications / Quality Mark  CB, STC issued by 0VE / KEMA-KEUR  CTI Test Report  Model L 7/30 with remote signal contact  230 t ff  400 t ff  600 t ff  750 t ff  1000 t ff  CODE  217 100  217 104  217 106  217 107  217 110  Remote signal contact  potential-free changeover contact  max. 1,5 mm² flexible	. ,	lfi						
Terminal - Conductor size  4-35 mm² flexible / 4-50 mm² semi rigid  Busbar connections  fork-type busbar 16 mm²  Mounting  indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715  Case material / Flammability grade  Pollution degree / Degree of protection  Approximate weight  Dimensions: width  Certifications / Quality Mark  Model L 7/30 with remote signal contact  230 t ff  4-35 mm² flexible / 4-50 mm² semi rigid  fork-type busbar 16 mm²  BMC / V-0 in accordance with UL 94  Pollution degree / Degree of protection  PD/IP 3 / 20 (built-in) 2 / 20 (built-in)  130 g 175 g 180 g 190 g 190 g  17,5 mm (1 module)  Certifications / Quality Mark  CB, STC issued by OVE / KEMA-KEUR  CTI Test Report  Model L 7/30 with remote signal contact  230 t ff 400 t ff 600 t ff 750 t ff 1000 t ff  CODE  217 100 217 104 217 106 217 107 217 110  Remote signal contact  potential-free changeover contact  Terminal - conductor size for remote signal contact  max. 1,5 mm² flexible	. ,				0 1			
Busbar connections    fork-type busbar 16 mm²	, , ,				,			
Mounting indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715  Case material / Flammability grade BMC / V-0 in accordance with UL 94  Pollution degree / Degree of protection PD/IP 3 / 20 (built-in) 2 / 20 (built-in)  Approximate weight 130 g 175 g 180 g 190 g 190 g  Dimensions: width Certifications / Quality Mark CB, STC issued by OVE / KEMA-KEUR CTI Test Report  Model L 7/30 with remote signal contact 230 t ff 400 t ff 600 t ff 750 t ff 1000 t ff  CODE 217 100 217 104 217 106 217 107 217 110  Remote signal contact potential-free changeover contact  Terminal - conductor size for remote signal contact max. 1,5 mm² flexible						0		
Case material / Flammability grade Pollution degree / Degree of protection Approximate weight Dimensions: width Certifications / Quality Mark  Model L 7/30 with remote signal contact  CODE  Remote signal contact  Conductor size for remote signal contact  BMC / V-0 in accordance with UL 94  2 / 20 (built-in) 2 / 2					71			
Pollution degree / Degree of protection PD/IP 3 / 20 (built-in) 2 / 20 (built-in)  Approximate weight 130 g 175 g 180 g 190 g 190 g  Dimensions: width 17,5 mm (1 module)  Certifications / Quality Mark CB, STC issued by OVE / KEMA-KEUR CTI Test Report  Model L 7/30 with remote signal contact 230 t ff 400 t ff 600 t ff 750 t ff 1000 t ff  CODE 217 100 217 104 217 106 217 107 217 110  Remote signal contact potential-free changeover contact  Terminal - conductor size for remote signal contact max. 1,5 mm² flexible	3							
Approximate weight 130 g 175 g 180 g 190 g 190 g  Dimensions: width 17,5 mm (1 module)  Certifications / Quality Mark CB, STC issued by OVE / KEMA-KEUR CTI Test Report  Model L 7/30 with remote signal contact 230 t ff 400 t ff 600 t ff 750 t ff 1000 t ff  CODE 217 100 217 104 217 106 217 107 217 110  Remote signal contact potential-free changeover contact  Terminal - conductor size for remote signal contact max. 1,5 mm² flexible		DD /ID	0.700		in accordance w			
Dimensions: width 17,5 mm (1 module)  Certifications / Quality Mark CB, STC issued by OVE / KEMA-KEUR CTI Test Report  Model L 7/30 with remote signal contact 230 t ff 400 t ff 600 t ff 750 t ff 1000 t ff  CODE 217 100 217 104 217 106 217 107 217 110  Remote signal contact potential-free changeover contact  Terminal - conductor size for remote signal contact max. 1,5 mm² flexible		PD/IP			400	, ,	100	
Certifications / Quality Mark  CB, STC issued by OVE / KEMA-KEUR  CTI Test Report  Model L 7/30 with remote signal contact  230 t ff 400 t ff 600 t ff 750 t ff 1000 t ff  CODE  217 100 217 104 217 106 217 107 217 110  Remote signal contact  Terminal - conductor size for remote signal contact  max. 1,5 mm² flexible			130 g		Ü		190 g	
Model L 7/30 with remote signal contact         230 t ff         400 t ff         600 t ff         750 t ff         1000 t ff           CODE         217 100         217 104         217 106         217 107         217 110           Remote signal contact         potential-free changeover contact           Terminal - conductor size for remote signal contact         max. 1,5 mm² flexible						<del>?</del> )	OTLT LD	
CODE217 100217 104217 106217 107217 110Remote signal contactpotential-free changeover contactTerminal - conductor size for remote signal contactmax. 1,5 mm² flexible	Certifications / Quality Mark			CB, STC issued by C	IVE / KEMA-KEUR		CII lest Report	
Remote signal contact potential-free changeover contact  Terminal - conductor size for remote signal contact max. 1,5 mm² flexible						750 t ff		
Terminal - conductor size for remote signal contact max. 1,5 mm² flexible	CODE		217 100	217 104	217 106	217 107	217 110	
	Remote signal contact			potential	-free changeover	contact		
Switching capacity remote signal contact ac: 250 V / 0,5 A - dc: 125 V / 0,2 A; 75 V / 0,5 A	Terminal - conductor size for remote signal contact							
	Switching capacity remote signal contact		ac: 250 V / 0,5 A - dc: 125 V / 0,2 A; 75 V / 0,5 A					















7/30 230 ff 2




Model L 7/30 ...









230 ff 2

L 7/30 230 ff 2 is a ready to install assembly of two voltage limiting SPDs providing three modes of protection, typically installed at the origin of the installation, e.g. in the Main Distribution Board (MDB), for single-phase 230 V TN-systems, with the following features and benefits:

- T1 SPD and T2 SPD (Type 1 and Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- Backup protection is not required with an upstream CB  $\leq$  160 A or up to an Isccr  $\leq$  5 kA rms;
- Three colour Status Indicator with progressive indication of remaining performance.

Wodel E 7700			200 11 2
CODE			207 120
Nominal ac system voltage		Un	230 V ac
Modes of protection			3
Max Continuous Operating Voltage		Uc	335 V ac
Test Class according to IEC 61643-11 Ed.1 (2011-03)			I and II
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)			T1 and T2
Impulse discharge current (10/350 µs)		limp	8 kA
Charge		Q	4 As
Nominal discharge current (8/20 µs)		In	30 kA
Max. discharge current (8/20 μs)		Imax	40 kA
Voltage protection level at a discharge current of:	1 kA	Up	≤ 0,81 kV
	5 kA	Up	≤ 0,98 kV
	20 kA	Up	≤ 1,35 kV
	25 kA	Up	≤ 1,45 kV
	30 kA	Up	≤ 1,60 kV
Response time		ta	≤ 25 ns
End of Life			OCM (Open Circuit Failure Mode)
Behaviour in case of Temporary OverVoltage (TOV)		UT	440 V / 120 min, withstand (W)
Short Circuit Current rating without backup protection (internal disconnector)		Isccr	5 kA rms
Short Circuit Current rating with max. backup protection fuse		Isccr	100 kA rms
Max. back-up protection with up-stream CB with a max. let-through energy of			160 A (max. 4,50 x 10 <sup>5</sup> A <sup>2</sup> s)
(max. prospective short circuit current depends on the CB breaking capability)			
Max. back-up protection with FUSE at prospective short circuit currents of			125 A gG (> 5 ÷ 100 kA rms)
Follow current interrupt rating		<b>l</b> fi	NFC No Follow Current®
Status indicator (indication of disconnector operation)			3 colours with progressive performance indication
Operating temperature range / Humidity			-40 +80 °C (extended) / 5% 95%
Terminal - Conductor size			4-35 mm² flexible / 4-50 mm² semi rigid
Mounting			indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715
Case material / Flammability grade			BMC / V-0 in accordance with UL 94
Pollution degree / Degree of protection		PD / IP	3 / 20 (built-in)
Approximate weight			310 g
Dimensions: width			35 mm (2 modules)
Certifications / Quality Mark			CB, STC issued by OVE / KEMA-KEUR

### Model L 7/30 ... with remote signal contact

Model L 7/30 with remote signal contact	230 t ff 2
CODE	217 120
Remote signal contact	potential-free changeover contact
Terminal - conductor size for remote signal contact	max. 1,5 mm <sup>2</sup> flexible
Switching capacity remote signal contact	ac: 250 V / 0,5 A - dc: 125 V / 0,2 A; 75 V / 0,5 A























L 7/30 ... ff :

L 7/30...ff 3 is a ready to install assembly of three voltage limiting SPDs providing six modes of protection, typically installed at the origin of the installation, e.g. in the Main Distribution Board (MDB), for three-phase TN systems, with the following features and benefits:

- T1 SPD and T2 SPD (Type 1 and Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- Backup protection is not required with an upstream CB ≤ 160 A or up to an Isccr ≤ 5 kA rms (for U<sub>N</sub> 230/400 V);
- Three colour Status Indicator with progressive indication of remaining performance.

### Wind Turbines

Model L 7/30		230 ff 3	400 ff 3	750 ff 3		
CODE		207 130	207 134	207 137		
Nominal ac system voltage	Un	230/400 V ac	400/690 V ac	554/960 V ac		
Modes of protection			6			
Max Continuous Operating Voltage	Uc	335 V ac	460 V	750 V ac		
Test Class according to IEC 61643-11 Ed.1 (2011-03)			I and II			
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)			T1 and T2			
Impulse discharge current (10/350 μs)	limp	8 kA	7 kA	5 kA		
Charge	Q	4 As	3,5 As	2,5 As		
Nominal discharge current (8/20 µs)	In	30 kA	30 kA	20 kA		
Max. discharge current (8/20 μs)	Imax		40 kA			
Voltage protection level at a discharge current of: 1 kA	Up	≤ 0,81 kV	≤ 1,20 kV	≤ 1,90 kV		
5 kA	Up	≤ 0,98 kV	≤ 1,46 kV	≤ 2,30 kV		
20 kA	Up	≤ 1,35 kV	≤ 1,95 kV	≤ 2,75 kV		
25 kA	Up	≤ 1,45 kV	≤ 2,03 kV	-		
30 kA	Up	≤ 1,60 kV	≤ 2,15 kV	_		
Response time	ta	,	≤ 25 ns			
End of Life		00	M (Open Circuit Failure Mo	de)		
Behaviour in case of Temporary OverVoltage (TOV)	UT	440 V / 5 s, (W)	581 V / 5 s, (W)	805 V / 5 s, (W)		
withstand (W) / safe (S):	Uт	440 V / 120 min, (W)	797 V / 120 min, (W)	1056 V / 120 min, (S)		
Short Circuit Current rating without backup protection (internal disconnector)	Isccr	5 kA rms	3 kA rms	2 kA rms		
Short Circuit Current rating with max. backup protection fuse	Isccr	100 kA rms	100 kA rms	100 kA rms		
Max. back-up protection with up-stream CB with max. let-through energy of		160 A (max.4,50x10 <sup>5</sup>	160 A (max.4,50x10 <sup>5</sup>	-		
(max. prospective short circuit current depends on CB breaking capability)		A <sup>2</sup> s)	A <sup>2</sup> s)			
Max. back-up protection with FUSE at prospective short circuit current of		125 A gG at	125 A gG at	125 A gG at		
· · · · · · · · · · · · · · · · · · ·		(> 5 ÷ 100 kA rms)	(> 3 ÷ 100 kA rms)	(> 2 ÷ 100 kA rms)		
Follow current interrupt rating	lfi	(* • • • • • • • • • • • • • • • • • • •	NFC No Follow Current®	(* = * * * * * * * * * * * * * * * * * *		
Status indicator (indication of disconnector operation)		3 colours w	ith progressive performand	e indication		
Operating temperature range / Humidity			. +80 °C (extended) / 5% .			
Terminal - Conductor size		4-35 m	ım² flexible / 4-50 mm² sei	mi rigid		
Mounting			7,5 mm top hat DIN rail IE	0		
Case material / Flammability grade		BMC / V-0 in accordance with UL 94				
Pollution degree / Degree of protection	PD / IP 3 / 20 (built-in) 3 / 20 (built-in) 2 / 20 (built-in)			2 / 20 (built-in)		
Approximate weight		491 g	491 g	582 g		
Dimensions: width			53 mm (3 modules)			
Certifications / Quality Mark		CB, S	TC issued by OVE / KEMA-	KEUR		

Model L 7/30 with remote signal contact	230 t ff 3	400 t ff 3	750 t ff 3		
CODE	217 130	217 134	217 137		
Remote signal contact	po	potential-free changeover contact			
Terminal - conductor size for remote signal contact		max. 1,5 mm² flexible			
Switching capacity remote signal contact	ac: 250 V	ac: 250 V / 0,5 A - dc: 125 V / 0,2 A; 75 V / 0,5 A			















/30 230 ff 4




Model I 7/20









220 ff /

L 7/30 230 ff 4 is a ready to install assembly of four voltage limiting SPDs providing ten modes of protection, typically installed at the origin of the installation, e.g. in the Main Distribution Board (MDB), for three-phase plus neutral 230/400 V TN-systems, with the following features and benefits:

- T1 SPD and T2 SPD (Type 1 and Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- Backup protection is not required with an upstream  $CB \le 160$  A or up to an  $ISCCT \le 5$  kA rms;
- Three colour Status Indicator with progressive indication of remaining performance.

Model L 7/30		230 ff 4
CODE		207 140
Nominal ac system voltage	Un	230/400 V ac
Modes of protection		10
Max Continuous Operating Voltage	Uc	335 V ac
Test Class according to IEC 61643-11 Ed.1 (2011-03)		I and II
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)		T1 and T2
Impulse discharge current (10/350 µs)	limp	8 kA
Charge	Q	4,0 As
Nominal discharge current (8/20 μs)	In	30 kA
Max. discharge current (8/20 µs)	Imax	40 kA
Voltage protection level at a discharge current of:  1 kA	Up	≤ 0,81 kV
5 kA	Up	≤ 0,98 kV
20 kA	Up	≤ 1,35 kV
25 kA	Up	≤ 1,45 kV
30 KA	Up	≤ 1,60 kV
Response time	ta	≤ 25 ns
End of Life		OCM (Open Circuit Failure Mode)
Behaviour in case of Temporary OverVoltage (TOV)	UT	440 V / 120 min, withstand (W)
Short Circuit Current rating without backup protection (internal disconnector)	Isccr	5 kA rms
Short Circuit Current rating with max. backup protection fuse	Isccr	100 kA rms
Max. back-up protection with up-stream CB with a max. let-through energy of		160 A (max. 4,50 x 10 <sup>5</sup> A <sup>2</sup> s)
(max. prospective short circuit current depends on the CB breaking capability)		
Max. back-up protection with FUSE at prospective short circuit currents of		125 A gG (> 5 ÷ 100 kA rms)
Follow current interrupt rating	lfi	NFC No Follow Current®
Status indicator (indication of disconnector operation)		3 colours with progressive performance indication
Operating temperature range / Humidity		-40 +80 °C (extended) / 5% 95%
Terminal - Conductor size		4-35 mm² flexible / 4-50 mm² semi rigid
Mounting		indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715
Case material / Flammability grade		BMC / V-0 in accordance with UL 94
Pollution degree / Degree of protection	PD / IP	3 / 20 (built-in)
Approximate weight		620 g
Dimensions: width		70 mm (4 modules)
Certifications / Quality Mark		CB, STC issued by OVE / KEMA-KEUR

Model L 7/30 with remote signal contact	230 t ff 4
CODE	217 140
Remote signal contact	potential-free changeover contact
Terminal - conductor size for remote signal contact	max. 1,5 mm² flexible
Switching capacity remote signal contact	ac: 250 V / 0,5 A - dc: 125 V / 0,2 A; 75 V / 0,5 A


























L 7/30 230 ff 1+1 is a ready to install assembly of a voltage limiting and a voltage switching SPD providing three modes of protection, typically installed in single-phase 230 V TT-systems where connection type CT2 (1+1) is required according to HD 60364-5-53, e.g. in the service entrance board (SEB), with the following features and benefits:

- T1 SPD and T2 SPD (Type 1 and Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- Backup protection is not required with an upstream  $CB \le 160$  A or up to an  $ISCCT \le 5$  kA rms;
- Three colour Status Indicator with progressive indication of remaining performance.

Model L 7/30 ... 230 ff 1+1

CODE			207 1	21		
Nominal ac system voltage	UN	N	230 V ac			
Modes of protection			3			
Max Continuous Operating Voltage (L-N)	Ud	С	335 V ac			
Max Continuous Operating Voltage (N-PE)	Ud	С	255 V	ac		
Test Class according to IEC 61643-11 Ed.1 (2011-03)			I and	II		
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)			T1 and	T2		
Impulse discharge current (10/350 µs) (L-N)	lim	пр	8 kA	l .		
Impulse discharge current (10/350 µs) (N-PE)	lim	пр	52 k/	A		
Charge (L-N)	Q	)	4 As			
Charge (N-PE)	Q	)	26 As	3 335 V ac 255 V ac I and II T1 and T2 8 kA 52 kA 4 As 26 As 30 kA 52 kA 40 kA 70 kA		
Nominal discharge current (8/20 µs) (L-N)	In	1	30 k/	4		
Nominal discharge current (8/20 µs) (N-PE)	In	1	52 k/	4		
Max. discharge current (8/20 µs) (L-N)	Ima	ax	40 k/	4		
Max. discharge current (8/20 µs) (N-PE)	Ima	ax	70 k/	4		
Voltage protection level (L-N, L-PE) at a discharge current of:	1 kA Up	р	≤ 0,81 kV	≤ 1,50 kV		
	5 kA Up	р	≤ 0,98 kV	≤ 1,50 kV		
	20 kA Up	р	≤ 1,35 kV	≤ 1,50 kV		
	25 kA Up	р	≤ 1,45 kV	≤ 1,50 kV		
	30 kA Up	р	≤ 1,60 kV	≤ 1,60 kV		
Voltage protection level (N-PE)	Up	р	≤ 1,50	kV		
Response time (L-N / N-PE)	ta	1				
End of Life (L-N)						
	L-N U			` '		
N-P	Ü			. ,		
Short Circuit Current rating without backup protection (internal disconnector)	Isco					
Short Circuit Current rating with max. backup protection fuse	Isco	cr				
Max. back-up protection with up-stream CB having a max. let-through energy of	f		160 A (max. 4,5	0 x 10 <sup>5</sup> A <sup>2</sup> s)		
(max. prospective short circuit current depends on the CB breaking capability)						
Max. back-up protection with FUSE at prospective short circuit currents of				·		
Follow current interrupt rating (L-N)	lfi		NFC No Follow Current®			
Follow current interrupt rating (N-PE)	lfi	i				
Status indicator (indication of disconnector operation) / N-PE (no disconnector)			3 colours with progressive performance indication / 2 colours for N-			
Operating temperature range / Humidity			,	,		
Terminal - Conductor size						
Mounting						
Case material / Flammability grade Pollution degree / Degree of protection	PD /	/ ID	BMC / V-0 in accordance with UL 94			
Approximate weight	FD/	IF	,	,		
Dimensions: width			310 g 35 mm (2 modules)			
Certifications / Quality Mark			CB, STC issued by OVE / KEMA-KEUR			
our amount of the quality wark			ob, or o issued by o	VE / NEIVIA NEUTI		

Model L 7/30 with remote signal contact	230 t m 1+1
CODE	217 121
Remote signal contact	potential-free changeover contact
Terminal - conductor size for remote signal contact	max. 1,5 mm² flexible
Cwitching capacity remote signal contact	3C: 250 V / 0.5 A = dc: 125 V / 0.2 A: 75 V / 0.5 A
























L 7/30 230 ff 3+1 is a ready to install assembly of three voltage limiting and a voltage switching SPD providing ten modes of protection, typically installed in three-phase plus neutral 230/400 V TT-systems where connection type CT2 (3+1) is required according to HD 60364-5-53, e.g. in the service entrance board (SEB), with the following features and benefits:

- T1 SPD and T2 SPD (Type 1 and Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- Backup protection is not required with an upstream  $CB \le 160$  A or up to an  $ISCCT \le 5$  kA rms;
- Three colour Status Indicator with progressive indication of remaining performance.

Model L 7/30 ... 230 ff 3+1 CODE 207 141

CODE			20/1	41	
inal ac system voltage		Un	230/400 V ac		
Modes of protection			10		
Max Continuous Operating Voltage (L-N)		Uc	335 V ac		
Max Continuous Operating Voltage (N-PE)		Uc	255 V	ac	
Test Class according to IEC 61643-11 Ed.1 (2011-03)			I and	II	
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)			T1 and	T2	
Impulse discharge current (10/350 µs) (L-N)		limp	8 kA	1	
Impulse discharge current (10/350 μs) (N-PE)		limp	52 k	A	
Charge (L-N)		Q	4 As	3	
Charge (N-PE)		Q	26 A	S	
Nominal discharge current (8/20 µs) (L-N)		In	30 k	A	
Nominal discharge current (8/20 µs) (N-PE)		In	52 k	A	
Max. discharge current (8/20 μs) (L-N)		Imax	40 k	A	
Max. discharge current (8/20 μs) (N-PE)		Imax	70 k	A	
Voltage protection level (L-N, L-PE) at a discharge current of:	1 kA	Up	≤ 0,81 kV	≤ 1,50 kV	
	5 kA	Up	≤ 0,98 kV	≤ 1,50 kV	
	20 kA	Up	≤ 1,35 kV	≤ 1,50 kV	
	25 kA	Up	≤ 1,45 kV	≤ 1,50 kV	
	30 kA	Up	≤ 1,60 kV	≤ 1,60 kV	
Voltage protection level (N-PE)		Up	≤ 1,50	kV	
Response time (L-N / N-PE)		<b>t</b> a	≤ 25 ns / ≤	100 ns	
End of Life (L-N)			OCM (Open Circuit	Failure Mode)	
Behaviour in case of Temporary OverVoltage (TOV):	L-N	Uτ	440 V / 120 min,	withstand (W)	
N-	-PE	Uτ	1200 V / 200 ms,	withstand (W)	
Short Circuit Current rating without backup protection (internal disconnector)		Isccr	5 kA ri	ms	
Short Circuit Current rating with max. backup protection fuse		Isccr	100 kA rms		
Max. back-up protection with up-stream CB having a max. let-through energy of	of		160 A (max. 4,5	50 x 10 <sup>5</sup> A <sup>2</sup> s)	
(max. prospective short circuit current depends on the CB breaking capability)					
Max. back-up protection with FUSE at prospective short circuit currents of			125 A gG (> 5 ÷	100 kA rms)	
Follow current interrupt rating (L-N)		lfi	NFC No Follow Current®		
Follow current interrupt rating (N-PE)		lfi	100 A rms		
Status indicator (indication of disconnector operation) / N-PE (no disconnector)	)		3 colours with progressive performan	ice indication / 2 colours for N-PE	
Operating temperature range / Humidity			-40 +80 °C (exten	ded) / 5% 95%	
Terminal - Conductor size			4-35 mm <sup>2</sup> flexible / 4-	-	
Mounting			indoor, 35 x 7,5 mm top ha		
Case material / Flammability grade			BMC / V-0 in accordance with UL 94		
Pollution degree / Degree of protection		PD / IP	3 / 20 (bu		
Approximate weight			620 g		
Dimensions: width			70 mm (4 modules)		
Certifications / Quality Mark			CB, STC issued by OVE / KEMA-KEUR		

#### Model I 7/30 with remote cional contact

Model L 7/30 with remote signal contact	230 t ff 3+1
CODE	217 141
Remote signal contact	potential-free changeover contact
Terminal - conductor size for remote signal contact	max. 1,5 mm <sup>2</sup> flexible
Switching capacity remote signal contact	ac: 250 V / 0,5 A - dc: 125 V / 0,2 A; 75 V / 0,5 A




























L 3/30 ... ff is a voltage limiting SPD providing a single mode of protection, typically installed in Sub Distribution Boards (SDB), in TN-systems or in TT-systems in combination with N-PE SPD model I 100, I 52 or I 12 and with connection type CT2 (1+1 or 3+1). It provides the following features and benefits:

- T2 SPD (Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- L 3/30 ... ff is a voltage limiting SPD, for the protection of low voltage installations and equipment against indirect lightning effects;
- Backup protection is not required with an upstream CB ≤ 160 A or up to an Isccr ≤ 5 kA rms (for U<sub>N</sub> 230/400 V);
- Short circuit current withstand of 50 kA rms with max. back-up fuse;
- Three colour Status Indicator with progressive indication of remaining performance.

Model L 3/30		60 ff	120 ff	230 ff	400 ff	
CODE		200 102	200 103	200 100	200 104	
Nominal ac system voltage	Un	60/104 V ac	120/208 V ac	230/400 V ac	400/690 V ac	
Modes of protection			1			
Max Continuous Operating Voltage	Uc	75 V ac	150 V ac	335 V ac	460 V ac	
Test Class according to IEC 61643-11 Ed.1 (2011-03)				l		
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)			T	2		
Nominal discharge current (8/20 µs)	In	20 kA	20 kA	30 kA	30 kA	
Max. discharge current (8/20 μs)	Imax	30 kA	30 kA	40 kA	40 kA	
Voltage protection level at a discharge current of: 1 kA	Up	≤ 0,22 kV	≤ 0,42 kV	≤ 0,81 kV	≤ 1,20 kV	
5 kA	Up	≤ 0,28 kV	≤ 0,50 kV	≤ 1,00 kV	≤ 1,45 kV	
10 kA	Up	≤ 0,36 kV	≤ 0,60 kV	≤ 1,20 kV	≤ 1,58 kV	
20 kA	Up	≤ 0,50 kV	≤ 0,80 kV	≤ 1,35 kV	≤ 1,90 kV	
30 kA	Up	-	-	≤ 1,50 kV	≤ 2,15 kV	
Response time	ta		≤ 25	5 ns		
End of Life			OCM (Open Circu	uit Failure Mode)		
Behaviour in case of Temp. OverVoltage (TOV)	UT	87 V / 5 s, (W)	174 V / 5 s, (W)	440 V / 5 s, (W)	607 V / 5 s, (W)	
withstand (W)/safe (S):	UT	115 V / 120 min, (S)	230 V / 120 min, (S)	440 V / 120min, (W)	760 V / 120 min, (S)	
Short Circuit Current rating without backup protection (internal disconnector)	Isccr	5 kA rms 3 kA rms				
Short Circuit Current rating with max. backup protection fuse	Isccr		50 kA	A rms		
Max. back-up protection with up-stream CB with max. let-through energy of		160 A	160 A	160 A	160 A	
(max. prospective short circuit current depends on CB breaking capability)		(max.4,80x10 <sup>5</sup> A <sup>2</sup> s)	(max.4,80x10 <sup>5</sup> A <sup>2</sup> s)	(max.4,50x10 <sup>5</sup> A <sup>2</sup> s)	(max.4,50x10 <sup>5</sup> A <sup>2</sup> s)	
Max. back-up protection with FUSE at prospective short circuit current of		125 A gG at				
		$(> 5 \div 50 \text{ kA rms})$	$(> 5 \div 50 \text{ kA rms})$	$(> 5 \div 50 \text{ kA rms})$	$(> 3 \div 50 \text{ kA rms})$	
Follow current interrupt rating	lfi	NFC No Follow Current®				
Status indicator (indication of disconnector operation)		3 c	olors with progressive	e performance indicat	ion	
Operating temperature range / Humidity			-40 +80 °C (exte	ended) / 5% 95%		
Terminal - Conductor size			4-35 mm <sup>2</sup> flexible /	4-50 mm <sup>2</sup> semi rigid		
Busbar connections			fork-type bus	sbar 16 mm²		
Mounting		indo	or, 35 x 7,5 mm top h	nat DIN rail IEC/EN 60	715	
Case material / Flammability grade			BMC / V-0 in accor	rdance with UL 94		
Pollution degree / Degree of protection	PD/IP		3 / 20 (I	built-in)		
Approximate weight		120 g	140 g	160 g	175 g	
Dimensions: width		17,5 mm (1 module)				
Certifications / Quality Mark			CB, STC issued by	OVE / KEMA-KEUR		

Model L 3/30 with remote signal contact	60 t ff	120 t ff	230 t ff	400 t ff	
CODE	210 102	210 103	210 100	210 104	
Remote signal contact	potential-free changeover contact				
Terminal - conductor size for remote signal contact	max. 1,5 mm² flexible				
Switching capacity remote signal contact	ac: 250 V / 0,5 A - dc: 125 V / 0,2 A; 75 V / 0,5 A				
















3/30 230 ff 2











L 3/30 230 ff 2 is a ready to install assembly of two voltage limiting SPDs, providing three modes of protection, typically installed in Sub Distribution Boards (SDB) for single-phase 230 V TN-systems, with the following features and benefits:

- T2 SPD (Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- L 3/30 230 ff 2 is a voltage limiting SPD, for the protection of low voltage installations and equipment against indirect light-
- Nominal discharge current of 30 kA 8/20 µs;
- Backup protection is not required with an upstream CB  $\leq$  160 A or up to an Isccr  $\leq$  5 kA rms;
- Short circuit current withstand of 50 kA rms with max. back-up fuse;
- Three colour Status Indicator with progressive indication of remaining performance.

Model L 3/30			230 ff 2
CODE			200 120
Nominal ac system voltage		Un	230 V ac
Modes of protection			3
Max Continuous Operating Voltage		Uc	335 V ac
Test Class according to IEC 61643-11 Ed.1 (2011-03)			ll l
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)			T2
Nominal discharge current (8/20 µs)		<b>I</b> n	30 kA
Max. discharge current (8/20 μs)		max	40 kA
Voltage protection level at a discharge current of:	1 kA	Up	≤ 0,82 kV
	5 kA	Up	≤ 1,00 kV
	10 kA	Up	≤ 1,25 kV
	20 kA	Up	≤ 1,40 kV
	30 kA	Up	≤ 1,60 kV
Response time		<b>t</b> a	≤ 25 ns
End of Life			OCM (Open Circuit Failure Mode)
Behaviour in case of Temporary OverVoltage (TOV)		Uτ	440 V / 120 min, withstand (W)
Short Circuit Current rating without backup protection (internal disconnector)		sccr	5 kA rms
Short Circuit Current rating with max. backup protection fuse		sccr	50 kA rms
Max. back-up protection with up-stream CB with a max. let-through energy of			160 A (max. 4,50 x 10 <sup>5</sup> A <sup>2</sup> s)
(max. prospective short circuit current depends on the CB breaking capability)			
Max. back-up protection with FUSE at prospective short circuit currents of			125 A gG (> $5 \div 50$ kA rms)
Follow current interrupt rating		<b>l</b> fi	NFC No Follow Current®
Status indicator (indication of disconnector operation)			3 colours with progressive performance indication
Operating temperature range / Humidity			-40 +80 °C (extended) / 5% 95%
Terminal - Conductor size			4-35 mm² flexible / 4-50 mm² semi rigid
Mounting			indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715
Case material / Flammability grade			BMC / V-0 in accordance with UL 94
Pollution degree / Degree of protection		PD / IP	3 / 20 (built-in)
Approximate weight			315 g
Dimensions: width			35 mm (2 modules)
Certifications / Quality Mark			CB, STC issued by OVE / KEMA-KEUR

Model L	3/30	with	remote	signal	contact
---------	------	------	--------	--------	---------

Model L 3/30 with remote signal contact	230 t ff 2
CODE	210 120
Remote signal contact	potential-free changeover contact
Terminal - conductor size for remote signal contact	max. 1,5 mm² flexible
Switching capacity remote signal contact	ac: 250 V / 0,5 A - dc: 125 V / 0,2 A; 75 V / 0,5 A























L 3/30 230 ff 3 is a ready to install assembly of three voltage limiting SPDs providing six modes of protection, typically installed in Sub Distribution Boards (SDB) for three-phase 230/400 V TN-systems, with the following features and benefits:

- T2 SPD (Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- L 3/30 230 ff 3 is a voltage limiting SPD, for the protection of low voltage installations and equipment against indirect lightning effects;
- Backup protection is not required with an upstream CB ≤ 160 A or up to an Isccr ≤ 5 kA rms;
- Short circuit current withstand of 50 kA rms with max. back-up fuse;
- Three colour Status Indicator with progressive indication of remaining performance.

Model L 3/30			230 ff 3
CODE			200 130
Nominal ac system voltage		Un	230/400 V ac
Modes of protection			6
Max Continuous Operating Voltage		Uc	335 V ac
Test Class according to IEC 61643-11 Ed.1 (2011-03)			
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)			T2
Nominal discharge current (8/20 µs)		In	30 kA
Max. discharge current (8/20 µs)		Imax	40 kA
Voltage protection level at a discharge current of:	1 kA	Up	≤ 0,82 kV
	5 kA	Up	≤ 1,00 kV
	10 kA	Up	≤ 1,25 kV
	20 kA	Up	≤ 1,40 kV
	30 kA	Up	≤ 1.60 kV
Reaction time		ta	≤ 25 ns
End of Life			OCM (open circuit failure mode)
Behaviour in case of Temporary OverVoltage (TOV)		UT	440 V / 120 min, withstand (W)
Short Circuit Current rating without backup protection (internal disconnector)		Isccr	5 kA rms
Short Circuit Current rating with max. backup protection fuse		Isccr	50 kA rms
Max. back-up protection with up-stream CB with a max. let-through energy of			160 A (max. 4,50 x 10 <sup>5</sup> A <sup>2</sup> s)
(max. prospective short circuit current depends on the CB breaking capability)			
Max. back-up protection with FUSE at prospective short circuit currents of			125 A gG (> 5 $\div$ 50 kA rms)
Follow current interrupt rating		lfi	NFC No Follow Current®
Status indicator (indication of disconnector operation)			3 colours with progressive performance indication
Operating temperature range / Humidity			-40 +80 °C (extended) / 5% 95%
Terminal - Conductor size			4-35 mm² flexible / 4-50 mm² semi rigid
Mounting			indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715
Case material / Flammability grade			BMC / V-0 in accordance with UL 94
Pollution degree / Degree of protection		PD / IP	3 / 20 (built-in)
Approximate weight			465 g
Dimensions: width			53 mm (3 modules)
Certifications / Quality Mark			CB, STC issued by OVE / KEMA-KEUR

Model L 3/30 with remote signal contact	230 t ff 3
CODE	210 130
Remote signal contact	potential-free changeover contact
Terminal - conductor size for remote signal contact	max. 1,5 mm² flexible
Switching capacity remote signal contact	ac: 250 V / 0.5 A – dc: 125 V / 0.2 A: 75 V / 0.5 A


























L 3/30 230 ff 4 is a ready to install assembly of four voltage limiting SPDs providing ten modes of protection, typically installed in Sub Distribution Boards (SDB) for three-phase plus neutral 230/400 V TN-systems, with the following features and benefits:

- T2 SPD (Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- L 3/30 230 ff 4 is a voltage limiting SPD, for the protection of low voltage installations and equipment against indirect lightning effects;
- Backup protection is not required with an upstream CB ≤ 160 A or up to an Isccr ≤ 5 kA rms;
- Short circuit current of 50 kA rms with max. back-up fuse;
- Three colour Status Indicator with progressive indication of remaining performance.

Model L 3/30			230 ff 4
CODE			200 140
Nominal ac system voltage		Un	230/400 V ac
Modes of protection			10
Max Continuous Operating Voltage		Uc	335 V ac
Test Class according to IEC 61643-11 Ed.1 (2011-03)			
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)			T2
Nominal discharge current (8/20 µs)		In	30 kA
Max. discharge current (8/20 μs)		Imax	40 kA
Voltage protection level at a discharge current of:	1 kA	Up	≤ 0,82 kV
	5 kA	Up	≤ 1,00 kV
	10 kA	Up	≤ 1,25 kV
	20 kA	Up	≤ 1,40 kV
	30 kA	Up	≤ 1,60 kV
Response time		ta	≤ 25 ns
End of Life			OCM (open circuit failure mode)
Behaviour in case of Temporary OverVoltage (TOV):		UT	440 V / 120 min, withstand (W)
Short Circuit Current rating without backup protection (internal disconnector)		Isccr	5 kA rms
Short Circuit Current rating with max. backup protection fuse		Isccr	50 kA rms
Max. back-up protection with up-stream CB with a max. let-through energy of			160 A (max. 4,50 x 10 <sup>5</sup> A <sup>2</sup> s)
(max. prospective short circuit current depends on the CB breaking capability)			
Max. back-up protection with FUSE at prospective short circuit currents of			125 A gG (> 5 $\div$ 50 kA rms)
Follow current interrupt rating		lfi	NFC No Follow Current®
Status indicator (indication of disconnector operation)			3 colours with progressive performance indication
Operating temperature range / Humidity			-40 +80 °C (extended) / 5% 95%
Terminal - Conductor size			4-35 mm <sup>2</sup> flexible / 4-50 mm <sup>2</sup> semi rigid
Mounting			indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715
Case material / Flammability grade			BMC / V-0 in accordance with UL 94
Pollution degree / Degree of protection		PD / IP	3 / 20 (built-in)
Approximate weight			620 g
Dimensions: width			70 mm (4 modules)
Certifications / Quality Mark			CB, STC issued by OVE / KEMA-KEUR

Model I	2/20	with	romoto	cianal	contact
wooerr	5/5U	. VVIIII	remote	Siuliai	COHIACI

Model L 3/30 with remote signal contact	230 t ff 4
CODE	210 140
Remote signal contact	potential-free changeover contact
Terminal - conductor size for remote signal contact	max. 1,5 mm² flexible
Switching capacity remote signal contact	ac: 250 V / 0,5 A - dc: 125 V / 0,2 A; 75 V / 0,5 A




























L 3/30 230 ff 1+1 is a ready to install assembly of a voltage limiting and a voltage switching SPD providing three modes of protection, typically installed in Sub Distribution Boards (SDBs) for single-phase 230 V TT-systems where connection type CT2 (1+1) is required according to HD 60364-5-53, with the following features and benefits:

- T2 SPD (Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- Backup protection is not required with an upstream  $CB \le 160 \text{ A}$  or up to an  $||\text{sccr}| \le 5 \text{ kA rms}$ ;
- Three colour Status Indicator with progressive indication of remaining performance.

Model L 3/30 ... 230 ff 1+1

CODE			200	121	
minal ac system voltage		Un	230 V	ac ac	
lodes of protection			3		
Max Continuous Operating Voltage (L-N)	Max Continuous Operating Voltage (L-N)		335 V ac		
Max Continuous Operating Voltage (N-PE)		Uc	255 V ac		
Test Class according to IEC 61643-11 Ed.1 (2011-03)					
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)			T2		
Nominal discharge current (8/20 µs) (L-N)		In	30 kA		
Nominal discharge current (8/20 µs) (N-PE)		In	40 kA		
Max. discharge current (8/20 μs) (L-N)		Imax	40 kA		
Max. discharge current (8/20 μs) (N-PE)		Imax	65 k	¢A	
Voltage protection level (L-N, L-PE) at a discharge current of:	1 kA	Up	≤ 0,82 kV	≤ 1,50 kV	
	5 kA	Up	≤ 1,00 kV	≤ 1,50 kV	
	10 kA	Up	≤ 1,25 kV	≤ 1,50 kV	
	20 kA	Up	≤ 1,40 kV	≤ 1,50 kV	
	30 kA	Up	≤ 1,60 kV	≤ 1,60 kV	
Voltage protection level (N-PE)		Up	≤ 1,50 kV		
Response time (L-N / N-PE)	•		≤ 25 ns / ≤ 100 ns		
End of Life (L-N)			OCM (open circui	it failure mode)	
Behaviour in case of Temporary OverVoltage (TOV):	L-N	UT	440 V / 120 min,	withstand (W)	
	N-PE	UT	1200 V / 200 ms	, withstand (W)	
Short Circuit Current rating without backup protection (internal disconnector)		Isccr	5 kA ı	rms	
Short Circuit Current rating with max. backup protection fuse		Isccr	50 kA rms		
Max. back-up protection with up-stream CB having a max. let-through energy of			160 A (max. 4,	50 x 10 <sup>5</sup> A <sup>2</sup> s)	
(max. prospective short circuit current depends on the CB breaking capability)					
Max. back-up protection with FUSE at prospective short circuit currents of			125 A gG (> 5	÷ 50 kA rms)	
Follow current interrupt rating (L-N)		lfi	NFC No Follo	w Current®	
Follow current interrupt rating (N-PE)		lfi	100 A	rms	
Status indicator (indication of disconnector operation) / N-PE (no disconnector)			3 colours with progressive performa	nce indication / 2 colours for N-PE	
Operating temperature range / Humidity			-40 +80 °C (extended) / 5% 95%		
Terminal - Conductor size			4-35 mm² flexible / 4-50 mm² semi rigid		
Mounting			indoor, 35 x 7,5 mm top ha		
Case material / Flammability grade			BMC / V-0 in accord		
Pollution degree / Degree of protection		PD / IP	3 / 20 (built-in)		
Approximate weight			280	0	
Dimensions: width			35 mm (2 i	*	
Certifications / Quality Mark			CB, STC issued by 0	OVE / KEMA-KEUR	

### Model L 3/30 ... with remote signal contact

Model L 3/30 with remote signal contact	230 tπ +1
CODE	210 121
Remote signal contact	potential-free changeover contact
Terminal - conductor size for remote signal contact	max. 1,5 mm² flexible
Switching capacity remote signal contact	ac: 250 V / 0.5 A - dc: 125 V / 0.2 A: 75 V / 0.5 A














30 230 ff 3+











L 3/30 230 ff 3+1 is a ready to install assembly of three voltage limiting and a voltage switching SPD providing four modes of protection, typically installed in Sub Distribution Boards (SDBs) for three-phase plus neutral 230/400 V TT-systems where connection type CT2 (3+1) is required according to HD 60364-5-53, with the following features and benefits:

- T2 SPD (Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- Backup protection is not required with an upstream  $CB \le 160$  A or up to an  $ISCCT \le 5$  kA rms;
- Three colour Status Indicator with progressive indication of remaining performance.

Model L3/30 ... 230 ff 3+1

1410d01 E0/00			200 11	011		
CODE			200 1	41		
Nominal ac system voltage		Un	230/400	V ac		
Modes of protection			10			
Max Continuous Operating Voltage (L-N)		Uc	335 V ac			
Max Continuous Operating Voltage (N-PE)		Uc	255 V ac			
Test Class according to IEC 61643-11 Ed.1 (2011-03)						
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)			T2			
Nominal discharge current (8/20 µs) (L-N)		In	30 k	30 kA		
Nominal discharge current (8/20 µs) (N-PE)		In	40 k	A		
Max. discharge current (8/20 μs) (L-N)		Imax	40 k	A		
Max. discarge current (8/20 µs) (N-PE)		Imax	65 k	A		
Voltage protection level (L-N, L-PE) at a discharge current of:	1 kA	Up	≤ 0,82 kV	≤ 1,50 kV		
	5 kA	Up	≤ 1,00 kV	≤ 1,50 kV		
	10 kA	Up	≤ 1,25 kV	≤ 1,50 kV		
	20 kA	Up	≤ 1,40 kV	≤ 1,50 kV		
	30 kA	Up	≤ 1,60 kV	≤ 1,60 kV		
Voltage protection level (N-PE)		Up	≤ 1,50	kV		
Response time (L-N / N-PE)		ta	≤ 25 ns / ≤ 100 ns			
End of Life (L-N)	End of Life (L-N)		OCM (open circuit	t failure mode)		
Behaviour in case of Temporary OverVoltage (TOV):	L-N	UT	440 V / 120 min,	withstand (W)		
	N-PE	UT	1200 V / 200 ms,	withstand (W)		
Short Circuit Current rating without backup protection (internal disconnector)		Isccr	5 kA r	ms		
Short Circuit Current rating with max. backup protection fuse		Isccr	50 kA rms			
Max. back-up protection with CB having a max. let-through energy of			160 A (max. 4,5	50 x 10 <sup>5</sup> A <sup>2</sup> s)		
(max. prospective short circuit current depends on the CB breaking capability	/)					
Max. back-up protection with FUSE at prospective short circuit currents of			125 A gG (> 5 ÷	÷ 50 kA rms)		
Follow current interrupt rating (L-N)		lfi	NFC No Follow	v Current®		
Follow current interrupt rating (N-PE)		lfi	100 A	rms		
Status indicator (indication of disconnector operation) / N-PE (no disconnector	or)		3 colours with progressive performan			
Operating temperature range / Humidity			-40 +80 °C (exter	,		
Terminal - Conductor size			4-35 mm <sup>2</sup> flexible / 4-	O .		
Mounting			indoor, 35 x 7,5 mm top ha			
Case material / Flammability grade		DD (ID	BMC / V-0 in accordance with UL 94			
Pollution degree / Degree of protection		PD / IP	3 / 20 (built-in)			
Approximate weight			590	0		
Dimensions: width			70 mm (4 m			
Certifications / Quality Mark			CB, STC issued by 0	VE / KEIVIA-KEUK		

Model L 3/30 with remote signal contact	230 t ff 3+1		
CODE	210 141		
Remote signal contact	potential-free changeover contact		
Terminal - conductor size for remote signal contact	max. 1,5 mm² flexible		
Switching capacity remote signal contact	ac: 250 V / 0,5 A - dc: 125 V / 0,2 A; 75 V / 0,5 A		


























230 + ff

L 2/10 230 ff is a voltage limiting SPD providing a single mode of protection, typically installed in Sub Distribution Boards (SDB), in TN-systems or in TT-systems in combination with N-PE SPD model I 52 or I 12 and where connection type CT2 (3+1 or 1+1) is required according to HD 60364-5-53. It provides the following features and benefits:

- T2 SPD (Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- L 2/10 230 ff is a voltage limiting SPD for the protection of low voltage installations and equipment against indirect lightning effects;
- Nominal discharge current of 10 kA 8/20 µs;
- Backup protection is not required with an upstream CB ≤ 160 A or up to an Isccr ≤ 5 kA rms;
- Short circuit current withstand of 50 kA rms with max. back-up fuse;
- NFC No Follow Current® technology, there are no follow currents drawn from the power supply system after operation;
- Three colour Status Indicator with progressive indication of remaining performance.

Model L 2/10			230 ff
CODE			202 100
Nominal ac system voltage		Un	230/400 V ac
Modes of protection			1
Max Continuous Operating Voltage		Uc	335 V ac
Test Class according to IEC 61643-11 Ed.1 (2011-03)			II
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)			T2
Nominal discharge current (8/20 µs)		<b>I</b> n	10 kA
Max. discharge current (8/20 μs)		max	20 kA
Voltage protection level at a discharge current of:	1 kA	Up	≤ 0,82 kV
	5 kA	Up	≤ 1,00 kV
	10 kA	Up	≤ 1,25 kV
Response time		<b>t</b> a	≤ 25 ns
End of Life			OCM (open circuit failure mode)
Behaviour in case of Temporary OverVoltage (TOV)		Uτ	440 V / 120 min, withstand (W)
Short Circuit Current rating without backup protection (internal disconnector)		sccr	5 kA rms
Short Circuit Current rating with max. backup protection fuse		sccr	50 kA rms
Max. back-up protection with up-stream CB with a max. let-through energy of			160 A (max. 4,50 x 10 <sup>5</sup> A <sup>2</sup> s)
(max. prospective short circuit current depends on the CB breaking capability).			
Max. back-up protection with FUSE at prospective short circuit currents of			125 A gG (> 5 $\div$ 50 kA rms)
Follow current interrupt rating		<b>I</b> fi	NFC No Follow Current®
Status indicator (indication of disconnector operation)			3 colours with progressive performance indication
Operating temperature range / Humidity			-40 +80 °C (extended) / 5% 95%
Terminal - Conductor size			4-35 mm² flexible / 4-50 mm² semi rigid
Busbar connections			fork-type busbar 16 mm <sup>2</sup>
Mounting			indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715
Case material / Flammability grade			BMC / V-0 in accordance with UL 94
Pollution degree / Degree of protection		PD / IP	3 / 20 (built-in)
Approximate weight			155 g
Dimensions: width			17,5 mm (1 module)
Certifications / Quality Mark			CB, STC issued by OVE / KEMA-KEUR

### Model I 2/10 with remote signal contact

Widder L 2/10 With remote Signal Contact	250 t II
CODE	212 100
Remote signal contact	potential-free changeover contact
Terminal - conductor size for remote signal contact	max. 1,5 mm² flexible
Switching capacity remote signal contact	ac: 250 V / 0,5 A - dc: 125 V / 0,2 A; 75 V / 0,5 A


























L 2/10 230 ff 2 is a ready to install assembly of two voltage limiting SPDs providing three modes of protection, typically installed in Sub Distribution Boards (SDB) for single-phase 230 V TN-systems, with the following features and benefits:

- T2 SPD (Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- L 2/10 230 ff 2 is a voltage limiting SPD for the protection of low voltage installations and equipment against indirect lightning effects;
- Backup protection is not required with an upstream CB ≤ 160 A or up to an Isccr ≤ 5 kA rms;
- Short circuit current withstand of 50 kA rms with max. back-up fuse;
- NFC No Follow Current® technology, there are no follow currents drawn from the power supply system after operation;
- Three colour Status Indicator with progressive indication of remaining performance.

Model L 2/10			230 ff 2
CODE			202 120
Nominal ac system voltage		Un	230 V ac
Modes of protection			3
Max Continuous Operating Voltage		Uc	335 V ac
Test Class according to IEC 61643-11 Ed.1 (2011-03)			ll l
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)			T2
Nominal discharge current (8/20 µs)		l <sub>n</sub>	10 kA
Max. discharge current (8/20 μs)		max	20 kA
Voltage protection level at a discharge current of:	1 kA	Up	≤ 0,83 kV
	5 kA	Up	≤ 1,00 kV
	10 kA	Up	≤ 1,25 kV
Response time		<b>t</b> a	≤ 25 ns
End of Life			OCM (open circuit failure mode)
Behaviour in case of Temporary OverVoltage (TOV)		U⊤	440 V / 120 min, withstand (W)
Short Circuit Current rating without backup protection (internal disconnector)		sccr	5 kA rms
Short Circuit Current rating with max. backup protection fuse		sccr	50 kA rms
Max. back-up protection with up-stream CB with a max. let-through energy of			160 A (max. 4,50 x 10 <sup>5</sup> A <sup>2</sup> s)
(max. prospective short circuit current depends on the CB breaking capability)			
Max. back-up protection with FUSE at prospective short circuit currents of			125 A gG (> $5 \div 50$ kA rms)
Follow current interrupt rating		<b>l</b> fi	NFC No Follow Current®
Status indicator (indication of disconnector operation)			3 colours with progressive performance indication
Operating temperature range / Humidity			-40 +80 °C (extended) / 5% 95%
Terminal - Conductor size			4-35 mm² flexible / 4-50 mm² semi rigid
Mounting			indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715
Case material / Flammability grade			BMC / V-0 in accordance with UL 94
Pollution degree / Degree of protection		PD / IP	3 / 20 (built-in)
Approximate weight			310 g
Dimensions: width			35 mm (2 modules)
Certifications / Quality Mark			CB, STC issued by OVE / KEMA-KEUR

Modell	2/10	with	ramota	lennio	contact
IVIOUGI I	_	. VVIIII	remote	Siuliai	COHIAGE

Model L 2/10 with remote signal contact	230 t ff 2		
CODE	212 120		
Remote signal contact	potential-free changeover contact		
Terminal - conductor size for remote signal contact	max. 1,5 mm² flexible		
Switching canacity remote signal contact	ac: 250 V / 0.5 A = dc: 125 V / 0.2 A: 75 V / 0.5 A		
























L 2/10 230 ff 4 is a ready to install assembly of four voltage limiting SPDs providing ten modes of protection, typically installed in Sub Distribution Boards (SDB) for three-phase plus neutral 230/400 V TN-systems, with the following features and benefits:

- T2 SPD (Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- L 2/10 230 ff 4 is a voltage limiting SPD for the protection of low voltage installations and equipment against indirect lightning effects;
- Backup protection is not required with an upstream  $CB \le 160$  A or up to an  $ISCCT \le 5$  kA rms;
- Short circuit current withstand of 50 kA rms with max. back-up fuse;
- NFC No Follow Current® technology, there are no follow currents drawn from the power supply system after operation;
- Three colour Status Indicator with progressive indication of remaining performance.

Model L 2/10			230 ff 4
CODE			202 140
Nominal ac system voltage		Un	230/400 V ac
Modes of protection			10
Max Continuous Operating Voltage		Uc	335 V ac
Test Class according to IEC 61643-11 Ed.1 (2011-03)			ll l
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)			T2
Nominal discharge current (8/20 µs)		In	10 kA
Max. discharge current (8/20 µs)		Imax	20 kA
Voltage protection level at a discharge current of:	1 kA	Up	≤ 0,83 kV
	5 kA	Up	≤ 1,00 kV
	10 kA	Up	≤ 1,25 kV
Response time		ta	≤ 25 ns
End of Life			OCM (open circuit failure mode)
Behaviour in case of Temporary OverVoltage (TOV)		Uт	440 V / 120 min, withstand (W)
Short Circuit Current rating without backup protection (internal disconnector)		Isccr	5 kA rms
Short Circuit Current rating with max. backup protection fuse		Isccr	50 kA rms
Max. back-up protection with up-stream CB with a max. let-through energy of			160 A (max. 4,50 x 10 <sup>5</sup> A <sup>2</sup> s)
(max. prospective short circuit current depends on the CB breaking capability).			
Max. back-up protection with FUSE at prospective short circuit currents of			125 A gG (> 5 ÷ 50 kA rms)
Follow current interrupt rating		<b>l</b> fi	NFC No Follow Current®
Status indicator (indication of disconnector operation)			3 colours with progressive performance indication
Operating temperature range / Humidity			-40 +80 °C (extended) / 5% 95%
Terminal - Conductor size			4-35 mm² flexible / 4-50 mm² semi rigid
Mounting			indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715
Case material / Flammability grade			BMC / V-0 in accordance with UL 94
Pollution degree / Degree of protection		PD / IP	3 / 20 (built-in)
Approximate weight			620 g
Dimensions: width			70 mm (4 modules)
Certifications / Quality Mark			CB, STC issued by OVE / KEMA-KEUR

Model L 2/10 with remote signal contact	230 t ff 4
CODE	212 140
Remote signal contact	potential-free changeover contact
Terminal - conductor size for remote signal contact	max. 1,5 mm² flexible
Switching capacity remote signal contact	ac: 250 V / 0.5 A – dc: 125 V / 0.2 A: 75 V / 0.5 A


























L 2/10 230 ff 1+1 is a ready to install assembly of a voltage limiting and a voltage switching SPD providing three modes of protection, typically installed in Sub Distribution Boards (SDBs) for single-phase 230 V TT-systems where connection type CT2 (1+1) is required according to HD 60364-5-53, with the following features and benefits:

- T2 SPD (Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- Backup protection is not required with an upstream  $CB \le 160$  A or up to an  $ISCCT \le 5$  kA rms;
- NFC No Follow Current® technology, there are no follow currents drawn from the power supply system after operation;
- Three colour Status Indicator with progressive indication of remaining performance.

Model L 2/10 ... 230 ff 1+1

CODE			202 12	21
Nominal ac system voltage		Un	230 V ac	
Modes of protection			3	
Max Continuous Operating Voltage (L-N)		Uc	335 V ac	
Max Continuous Operating Voltage (N-PE)		Uc	255 V ac	
Test Class according to IEC 61643-11 Ed.1 (2011-03)			I	
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)			T2	
Nominal discharge current (8/20 µs) (L-N)		In	10 kA	
Nominal discharge current (8/20 µs) (N-PE)		In	40 kA	
Max. discharge current (8/20 µs) (L-N)		Imax	20 kA	
Max. discharge current (8/20 µs) (N-PE)		Imax	65 kA	
Voltage protection level (L-N, L-PE) at a discharge current of:	1 kA	Up	≤ 0,83 kV	≤ 1,50 kV
	5 kA	Up	≤ 1,00 kV	≤ 1,50 kV
	10 kA	Up	≤ 1,25 kV	≤ 1,50 kV
Voltage protection level (N-PE)		Up	≤ 1,50 l	kV
Response time (L-N / N-PE)		ta	≤ 25 ns / ≤ 100 ns	
End of Life (L-N)			OCM (open circuit failure mode)	
Behaviour in case of Temporary OverVoltage (TOV):	L-N	UT	440 V / 120 min, v	vithstand (W)
	N-PE	Uτ	1200 V / 200 ms, v	vithstand (W)
Short Circuit Current rating without backup protection (internal disconnector)		Isccr	5 kA rm	ns .
Short Circuit Current rating with max. backup protection fuse		Isccr	50 kA rr	ns
Max. back-up protection with up-stream CB with a max. let-through energy of			160 A (max. 4,50	$0 \times 10^5  \text{A}^2 \text{s}$
(max. prospective short circuit current depends on the CB breaking capability).				
Max. back-up protection with FUSE at prospective short circuit currents of			125 A gG (> 5 ÷ 50 kA rms)	
Follow current interrupt rating (L-N)		lfi	NFC No Follow Current®	
Follow current interrupt rating (N-PE)		lfi	100 A rms	
Status indicator (indication of disconnector operation) / N-PE (no disconnector)			3 colours with progressive performance	ce indication / 2 colours for N-PE
Operating temperature range / Humidity			-40 +80 °C (extend	/
Terminal - Conductor size			4-35 mm² flexible / 4-50 mm² semi rigid	
Mounting			indoor, 35 x 7,5 mm top hat	
Case material / Flammability grade			BMC / V-0 in accorda	
Pollution degree / Degree of protection		PD / IP	3 / 20 (bui	•
Approximate weight			280 g	
Dimensions: width			35 mm (2 m	/
Certifications / Quality Mark			CB, STC issued by OV	'E / KEMA-KEUR

### 441 0/40

Model L 2/10 with remote signal contact	230 t ff 1+1
CODE	212 121
Remote signal contact	potential-free changeover contact
Terminal - conductor size for remote signal contact	max. 1,5 mm² flexible
Switching canacity ramote signal contact	$20.250 \text{ V} / 0.5 \text{ A} = 40.125 \text{ V} / 0.2 \text{ A} \cdot 75 \text{ V} / 0.5 \text{ A}$














/10 230 ff 3+1











L 2/10 230 ff 3+1 is a ready to install assembly of three voltage limiting and a voltage switching SPD providing ten modes of protection, typically installed in Sub Distribution Boards (SDBs) for three-phase plus neutral 230/400 V TT-systems where connection type CT2 (3+1) is required according to HD 60364-5-53, with the following features and benefits:

- T2 SPD (Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- Backup protection is not required with an upstream  $CB \le 160$  A or up to an  $ISCCT \le 5$  kA rms;
- NFC No Follow Current® technology, there are no follow currents drawn from the power supply system after operation;
- Three colour Status Indicator with progressive indication of remaining performance.

Model L 2/10 ... 230 ff 3+1

CODE			202 1	41
Nominal ac system voltage		Un	230/400 V ac	
Modes of protection			10	
Max Continuous Operating Voltage (L-N)		Uc	335 V ac	
Max Continuous Operating Voltage (N-PE)		Uc	255 V ac	
Test Class according to IEC 61643-11 Ed.1 (2011-03)				
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)			T2	
Nominal discharge current (8/20 µs) (L-N)		In	10 kA	
Nominal discharge current (8/20 µs) (N-PE)		In	40 kA	
Max. discharge current (8/20 µs) (L-N)		Imax	20 k/	Į.
Max. discharge current (8/20 μs) (N-PE)		Imax	65 k/	P
Voltage protection level (L-N, L-PE) at a discharge current of:	1 kA	Up	≤ 0,83 kV	≤ 1,50 kV
	5 kA	Up	≤ 1,00 kV	≤ 1,50 kV
	10 kA	Up	≤ 1,25 kV	≤ 1,50 kV
Voltage protection level (N-PE)		Up	≤ 1,50	kV
Response time (L-N / N-PE)		ta	≤ 25 ns / ≤	100 ns
End of Life (L-N)			OCM (open circuit failure mode)	
Behaviour in case of Temporary OverVoltage (TOV):	L-N	UT	440 V / 120 min,	withstand (W)
	N-PE	UT	1200 V / 200 ms,	withstand (W)
Short Circuit Current rating without backup protection (internal disconnector)		Isccr	5 kA rr	ns
Short Circuit Current rating with max. backup protection fuse		Isccr	50 kA r	ms
Max. back-up protection with up-stream CB having a max. let-through energy of			160 A (max. 4,5	0 x 10 <sup>5</sup> A <sup>2</sup> s)
(max. prospective short circuit current depends on the CB breaking capability)				
Max. back-up protection with FUSE at prospective short circuit currents of			125 A gG (> 5 ÷	· 50 kA rms)
Follow current interrupt rating (L-N)		lfi	NFC No Follow Current®	
Follow current interrupt rating (N-PE)		lfi	100 A rms	
Status indicator (indication of disconnector operation) / N-PE (no disconnector)			3 colours with progressive performan	ce indication / 2 colours for N-PE
Operating temperature range / Humidity			-40 +80 °C (exten	1
Terminal - Conductor size			4-35 mm² flexible / 4-50 mm² semi rigid	
Mounting			indoor, 35 x 7,5 mm top ha	t DIN rail IEC/EN 60715
Case material / Flammability grade			BMC / V-0 in accord	
Pollution degree / Degree of protection		PD / IP	3 / 20 (built-in)	
Approximate weight			590 (	
Dimensions: width			70 mm (4 m	,
Certifications / Quality Mark			CB, STC issued by O'	VE / KEMA-KEUR

Model L 2/10 with remote signal contact	230 t ff 3+1
CODE	212 141
Remote signal contact	potential-free changeover contact
Terminal - conductor size for remote signal contact	max. 1,5 mm² flexible
Switching capacity remote signal contact	ac: 250 V / 0,5 A - dc: 125 V / 0,2 A; 75 V / 0,5 A















2/10 230 ff 2 T




Model L2/10 ...









230 ff 2 TT

L 2/10 230 ff 2 TT is a ready to install assembly of two voltage limiting SPDs providing three modes of protection, typically installed in Sub Distribution Boards (SDBs) for single-phase 230 V TT-systems downstream a RCD where connection type CT1 is applied according to HD 60364-5-53. This SPD is also suitable for single-phase 230 V TN-systems, when high resistability against TOVs is required. It provides the following features and benefits:

- T2 SPD (Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- Backup protection is not required with an upstream  $CB \le 160$  A or up to an  $|SCC| \le 5$  kA rms;
- Three colour Status Indicator with progressive indication of remaining performance.

CODE 202 220

Nominal ac system voltage		Un	230 V ac
Modes of protection			3
Max Continuous Operating Voltage		Uc	335 V ac
Test Class according to IEC 61643-11 Ed.1 (2011-03)			ll l
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)			T2
Nominal discharge current (8/20 µs)		In	10 kA
(the upstream RCD may trip when discharge currents exceed 3 kA 8/20 µs)		III	10 KA
Max. discharge current (8/20 μs)		Imax	20 kA
(the upstream RCD may trip when discharge currents exceed 3 kA 8/20 μs)		IIIIax	20 NA
Voltage protection level at a discharge current of:	1 kA	Up	≤ 0,83 kV
	5 kA	Up	≤ 1,00 kV
	10 kA	Up	≤ 1,25 kV
Response time		ta	≤ 25 ns
End of Life			OCM (Open Circuit Failure Mode)
Behaviour in case of Temporary OverVoltage (TOV):	L-PE	UT	440 V / 120 min, withstand (W); 1.455 V / 200 ms, safe (S)
	N-PE	UT	1.200 V / 200 ms, withstand (W)
Short Circuit Current rating without backup protection (internal disconnector)		Isccr	5 kA rms
Short Circuit Current rating with max. backup protection fuse		Isccr	50 kA rms
Max. back-up protection with up-stream CB with a max. let-through energy of			160 A (max. 4,50 x 10 <sup>5</sup> A <sup>2</sup> s)
(max. prospective short circuit current depends on the CB breaking capability).			
Max. back-up protection with FUSE at prospective short circuit currents of			125 A gG (> $5 \div 50$ kA rms)
Follow current interrupt rating		lfi	NFC No Follow Current®
Status indicator (indication of disconnector operation)			3 colours with progressive performance indication
Operating temperature range / Humidity			-40 +80 °C (extended) / 5% 95%
Terminal - Conductor size			4-35 mm² flexible / 4-50 mm² semi rigid
Mounting			indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715
Case material / Flammability grade		/	BMC / V-0 in accordance with UL 94
Pollution degree / Degree of protection		PD / IP	3 / 20 (built-in)
Approximate weight			310 g
Dimensions: width			35 mm (2 modules)
Certifications / Quality Mark			CB, STC issued by OVE / KEMA-KEUR

Model L 2/10 with remote signal contact	230 t ff 2 1 l
CODE	212 220
Remote signal contact	potential-free changeover contact
Terminal - conductor size for remote signal contact	max. 1,5 mm² flexible
Switching canacity remote signal contact	ac: $250 \text{ V} / 0.5 \Delta = \text{dc} \cdot 125 \text{ V} / 0.2 \Delta \cdot 75 \text{ V} / 0.5 \Delta$


















Model L 2/10 ...









230 ff 4 TT

CB, STC issued by OVE / KEMA-KEUR

L 2/10 230 ff 4 TT is a ready to install assembly of four voltage limiting SPDs providing four modes of protection, typically installed in Sub Distribution Boards (SDBs) for three-phase plus neutral 230/400 V TT-systems downstream a RCD where connection type CT1 is applied according to HD 60364-5-53. This SPD is also suitable for three-phase plus neutral 230/400 V TN-systems, when high resistability against TOVs is required.

It provides the following features and benefits:

- T2 SPD (Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- Backup protection is not required with an upstream CB ≤ 160 A or up to an Isccr ≤ 5 kA rms;
- Three colour Status Indicator with progressive indication of remaining performance.

CODE 202 240 Nominal ac system voltage Un 230/400 V ac Modes of protection (number of poles) 4 Max Continuous Operating Voltage Uc 335 V ac Test Class according to IEC 61643-11 Ed.1 (2011-03) Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025) T2 Nominal discharge current (8/20 µs) 10 kA (the upstream RCD may trip when discharge currents exceed 3 kA 8/20 µs) Max. discharge current (8/20 µs) 20 kA Imax (the upstream RCD may trip when discharge currents exceed 3 kA 8/20 us) Voltage protection level at a discharge current of: 1 kA Up ≤ 0,83 kV 5 kA ≤ 1,00 kV Up 10 kA Up ≤ 1,25 kV Response time ≤ 25 ns ta OCM (open circuit failure mode) End of Life Behaviour in case of Temporary OverVoltage (TOV) L-PE 440 V / 120 min, (W); 1.455 V / 200 ms, (S) IJT withstand (W) / safe (S): N-PE Uт 1200 V / 200 ms, (W) Short Circuit Current rating without backup protection (internal disconnector) 5 kA rms Iscor Short Circuit Current rating with max, backup protection fuse 50 kA rms Max. back-up protection with up-stream CB with a max. let-through energy of 160 A (max. 4,50 x 105 A2s) (max. prospective short circuit current depends on the CB breaking capability). Max. back-up protection with FUSE at prospective short circuit currents of 125 A gG (>  $5 \div 50$  kA rms) Follow current interrupt rating NFC No Follow Current® Status indicator (indication of disconnector operation) 3 colours with progressive performance indication Operating temperature range / Humidity -40 ... +80 °C (extended) / 5% ... 95% Terminal - Conductor size 4-35 mm<sup>2</sup> flexible / 4-50 mm<sup>2</sup> semi rigid Mounting indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715 Case material / Flammability grade BMC / V-0 in accordance with UL 94 Pollution degree / Degree of protection PD / IP 3 / 20 (built-in) Approximate weight 620 q Dimensions: width 70 mm (4 modules)

Model L 2/10 ... with remote signal contact

Certifications / Quality Mark

Model L 2/10 with remote signal contact	230 t ff 4 1 l
CODE	212 240
Remote signal contact	potential-free changeover contact
Terminal - conductor size for remote signal contact	max. 1,5 mm² flexible
Switching canacity remote signal contact	ac: $250 \text{ V} / 0.5 \Delta = \text{dc} \cdot 125 \text{ V} / 0.2 \Delta \cdot 75 \text{ V} / 0.5 \Delta$













## Surge Protective Devices: **ZOTUPGAP**
















I 12 N-PE is a voltage switching SPD providing a single mode of protection, typically installed in TT-systems between neutral conductor N and protective earth PE, where connection type CT2 (3+1 or 1+1) is required according to HD 60364-5-53, with the following features and benefits:

- T1 SPD and T2 SPD (Type 1 and Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- I 12 N-PE is a Gas Discharge Tube (GDT) based SPD for protection of low voltage installations and equipment against direct and indirect lightning effects;
- Impulse discharge current of 12,5 kA 10/350 μs;
- Nominal discharge current of 40 kA 8/20 μs;
- The special housing is designed for "Pollution Degree 3";
- To be combined with L 3/30 230 ff or L 2/10 230 ff.

### Model I 12 N-PE

CODE		207 300
Nominal ac system voltage	Un	230 V ac
Modes of protection (number of poles)		1 (N-PE)
Max Continuous Operating Voltage	Uc	255 V ac
Test Class according to IEC 61643-11 Ed.1 (2011-03)		I and II
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)		T1 and T2
Impulse discharge current (10/350 μs)	limp	12,5 kA
Charge	Q	6,25 As
Nominal discharge current (8/20 µs)	In	40 kA
Max. discharge current (8/20 μs)	Imax	65 kA
Follow current interrupt rating	lfi	100 A rms
Voltage protection level	Up	≤ 1,50 kV
Response time	ta	≤ 100 ns
Behaviour in case of Temporary OverVoltage (TOV)	UT	1200 V / 200 ms, withstand (W)
Operating temperature range / Humidity		-40 +80 °C (extended) / 5% 95%
Terminal-Conductor size		4-35 mm² flexible / 4-50 mm² semi rigid
Busbar connections		fork-type busbar 16 mm <sup>2</sup>
Mounting		indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715
Case material / Flammability grade		BMC / V-0 in accordance with UL 94
Pollution degree / Degree of protection	PD / IP	3 / 20 (built-in)
Approximate weight		120 g
Dimensions: width		17,5 mm (1 module)
In bundle with		L 3/30 230 ff and L 2/10 230 ff
Certifications / Quality Mark		CB, STC issued by OVE / KEMA-KEUR

### Model I 12 N-PE t with remote signal contact

Model 172 14 12 t With Territorio digital contact		
CODE	217 300	
Remote signal contact	potential-free changeover contact	
Terminal - conductor size for remote signal contact	max. 1,5 mm² flexible	
Switching capacity remote signal contact	ac: 250 V / 0.5 A – dc: 125 V / 0.2 A: 75 V / 0.5 A	





















IL 4/20 400 ff 2 IT is a ready to install assembly of two voltage limiting and a voltage switching SPD-module, providing three modes of protection, typically installed in IT systems according to HD 60364-5-53 (e.g. in the service entrance board SEB), with the following features and benefits:

- Backup protection is not required with an upstream CB ≤ 160 A or up to an Isccr ≤ 2 kA rms;
- No leakage current to PE;
- Three colour Status Indicator with progressive indication of remaining performance / two colours for GDT.

Model IL 4/20 ... 400 ff 2 IT CODE 207 220 Nominal ac system voltage Un 230 / 400 V ac Modes of protection Max Continuous Operating Voltage (L/N-PE) Uc 440 V ac Test Class according to IEC 61643-11 Ed.1 (2011-03) I and II Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025) T1 and T2 Impulse discharge current (10/350 μs) 2 kA Charge Q 2,5 As Nominal discharge current (8/20 µs) 20 kA Max. discharge current (8/20 µs) Imax 40 kA Voltage protection level (L/N-PE) at a discharge current of: 1 kA  $\leq$  2,10 kV Up 5 kA  $\leq$  2,40 kV Un 10 kA Up  $\le 2,70 \text{ kV}$ 15 kA Up  $\leq 3,00 \text{ kV}$ 20 kA Un ≤ 3,30 kV Voltage protection level (L-PE) at 6 kV (1,2/50 μs)  $\le 4,00 \text{ kV}$ Up Response time L-PE ≤ 100 ns **t**a End of Life (L-PE) OCM (Open Circuit Failure Mode) L-PE Behaviour of failure mode in case of Temporary OverVoltage (TOV): IJτ 1640 V / 200 ms, safe (S) Short Circuit Current rating without backup protection (internal disconnector) 2 kA rms Iscor Short Circuit Current rating with max. backup protection fuse 100 kA rms Max. back-up protection with up-stream CB with a max. let-through energy of 160 A (max. 4,50 x 10<sup>5</sup> A<sup>2</sup>s) (max. prospective short circuit current depends on the CB breaking capability) Max. back-up protection with FUSE at prospective short circuit currents of 125 A gG\* (>  $5 \div 100$  kA rms) Follow current interrupt rating (L-PE) NFC No Follow Current® 3 colours with progressive performance indication + 2 colours for GDT Status indicator (indication of disconnector operation) Operating temperature range / Humidity -40 ... +80 °C (extended) / 5% ... 95% Terminal - Conductor size 4-35 mm<sup>2</sup> flexible / 4-50 mm<sup>2</sup> semi rigid indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715 Mounting Case material / Flammability grade BMC / V-0 in accordance with UL 94 Pollution degree / Degree of protection PD / IP 2 / 20 (built-in) Approximate weight 280 g Dimensions: width 53 mm (3 modules)

Model IL 2/20 with remote signal contact	400 t ff 2 IT
CODE	217 220
Remote signal contact	potential-free changeover contact
Terminal - conductor size for remote signal contact	max. 1,5 mm² flexible
Switching capacity remote signal contact	ac: 250 V / 0,5 A - dc: 125 V / 0,2 A; 75 V / 0,5 A












### Surge Protective Devices: **ZOTUPCOMB**











IL 4/20 400 ff 3 IT is a ready to install assembly of three voltage limiting and a voltage switching SPD-module, providing six modes of protection, typically installed in IT systems according to HD 60364-5-53 (e.g. in the service entrance board SEB), with the following features and benefits:

- Backup protection is not required with an upstream CB ≤ 160 A or up to an Isccr ≤ 2 kA rms;
- No leakage current to PE;
- Three colour Status Indicator with progressive indication of remaining performance / two colours for GDT.

Model IL 4/20			400 ff 3 IT
CODE			207 230
Nominal ac system voltage		Un	230 / 400 V ac
Mode of protection			6
Max Continuous Operating Voltage (L-PE)		Uc	440 V ac
Test Class according to IEC 61643-11 Ed.1 (2011-03)			I and II
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)			T1 and T2
Impulse discharge current (10/350 µs)		limp	10 kA
Charge		Q	5 As
Nominal discharge current (8/20 µs)		In	20 kA
Max. discharge current (8/20 μs)		Imax	40 kA
Voltage protection level (L-PE) at a discharge current of:	1 kA	Up	≤ 2,00 kV
	5 kA	Up	≤ 2,30 kV
	10 kA	Up	≤ 2,50 kV
	15 kA	Up	≤ 2,70 kV
	20 kA	Up	≤ 2,90 kV
Voltage protection level (L-PE) at 6 kV (1,2/50 μs)		Up	≤ 4,00 kV
Response time L-PE		ta	≤ 100 ns
End of Life (L-PE)			OCM (Open Circuit Failure Mode)
Behaviour of failure mode in case of Temporary OverVoltage (TOV):	L-PE	UT	1960 V / 200 ms, withstand (W)
Short Circuit Current rating without backup protection (internal disconnector)		Isccr	2 kA rms
Short Circuit Current rating with max. backup protection fuse			100 kA rms
Max. back-up protection with up-stream CB with a max. let-through energy of			160 A (max. 4,50 x 10 <sup>5</sup> A <sup>2</sup> s)
(max. prospective short circuit current depends on the CB breaking capability)			
Max. back-up protection with FUSE at prospective short circuit currents of			125 A gG (> 2 ÷ 100 kA rms)
Follow current interrupt rating (L-PE)		lfi	NFC No Follow Current®
Status indicator (indication of disconnector operation)			3 colours with progressive performance indication + 2 colours for GDT
Operating temperature range / Humidity			-40 +80 °C (extended) / 5% 95%
Terminal - Conductor size			4-35 mm <sup>2</sup> flexible / 4-50 mm <sup>2</sup> semi rigid
Mounting			indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715
Case material / Flammability grade			BMC / V-0 in accordance with UL 94
Pollution degree / Degree of protection		PD / IP	2 / 20 (built-in)
Approximate weight			1.260 g
Dimensions: width			140 mm (8 modules)

### Model II 2/20 with remote signal contact

Model IL 2/20 with remote signal contact	400 t ff 3 IT
CODE	217 230
Remote signal contact	potential-free changeover contact
Terminal - conductor size for remote signal contact	max. 1,5 mm <sup>2</sup> flexible
Switching capacity remote signal contact	ac: 250 V / 0,5 A - dc: 125 V / 0,2 A; 75 V / 0,5 A



















IL 4/20 690 ff 2 IT is a ready to install assembly of two voltage limiting and a voltage switching SPD-module, providing three modes of protection, typically installed in IT systems according to HD 60364-5-53 (e.g. in the service entrance board SEB), with the following features and benefits:

- Backup protection is not required with an upstream CB ≤ 160 A or up to an Isccr ≤ 2 kA rms;
- No leakage current to PE;

Model IL 4/20 ...

Modes of protection

Nominal ac system voltage

CODE

Three colour Status Indicator with progressive indication of remaining performance / 2 colours for GDT.

Max Continuous Operating Voltage (L-PE) Uc 760 V ac Test Class according to IEC 61643-11 Ed.1 (2011-03) I and II Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025) T1 and T2 Impulse discharge current (10/350 μs) 2 kA Charge Q 1 As Nominal discharge current (8/20 µs) 20 kA Max. discharge current (8/20 µs) Imax 40 kA Voltage protection level (L-PE) at a discharge current of: ≤ 2,90 kV 1 kA Up 5 kA  $\leq$  3,10 kV Un 10 kA Up  $\leq$  3,50 kV 15 kA Up ≤ 3,80 kV 20 kA Un ≤ 4,00 kV Voltage protection level (L-PE) at 6 kV (1,2/50 μs)  $\leq 4,00 \text{ kV}$ Up ≤ 100 ns Response time L-PE ta End of Life (L-PE) OCM (Open Circuit Failure Mode) Behaviour of failure mode in case of Temporary OverVoltage (TOV): L-PE UT 1960 V / 200 ms, safe (S) Short Circuit Current rating without backup protection (internal disconnector) 2 kA rms Iscor Short Circuit Current rating with max. backup protection fuse 100 kA rms Max. back-up protection with up-stream CB with a max. let-through energy of 160 A (max. 4,50 x 10<sup>5</sup> A<sup>2</sup>s) (max. prospective short circuit current depends on the CB breaking capability) Max. back-up protection with FUSE at prospective short circuit currents of 80 A gG (> 2 ÷ 100 kA rms)

Un

### Model IL 2/20 with remote signal contact

Status indicator (indication of disconnector operation) / N-PE (no disconnector)

Follow current interrupt rating (L-PE)

Case material / Flammability grade

Pollution degree / Degree of protection

Terminal - Conductor size

Approximate weight

Dimensions: width

Mounting

Operating temperature range / Humidity

690 t ff 2 IT	690	t	ff	2	ΙT
---------------	-----	---	----	---	----

NFC No Follow Current®

3 colours with progressive performance indication / 2 colours for GDT

-40 ... +80 °C (extended) / 5% ... 95%

4-35 mm<sup>2</sup> flexible / 4-50 mm<sup>2</sup> semi rigid indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715

BMC / V-0 in accordance with UL 94

2 / 20 (built-in)

550 g

53 mm (3 modules)

690 ff 2 IT

207 224

400 / 690 V ac

3

Wodor in 2/20 With romoto digital contact	000 th 2 h
CODE	217 224
Remote signal contact	potential-free changeover contact
Terminal - conductor size for remote signal contact	max. 1,5 mm² flexible
Switching capacity remote signal contact	ac: 250 V / 0.5 A - dc: 125 V / 0.2 A: 75 V / 0.5 A

PD / IP










### Surge Protective Devices: **ZOTUPCOMB**











4/20 690 ff 3 IT

IL 4/20 690 ff 3 IT s a ready to install assembly of three voltage limiting and a voltage switching SPD-module, providing six modes of protection, typically installed in IT systems according to HD 60364-5-53 (e.g. in the service entrance board SEB), with the following features and benefits:

- Backup protection is not required with an upstream  $CB \le 160$  A or up to an  $ISCCT \le 2$  kA rms;
- No leakage current to PE;
- Three colour Status Indicator with progressive indication of remaining performance / two colours for GDT.

Model IL 4/20 ... 690 ff 3 IT CODE

OODL			207 234
Nominal ac system voltage		Un	400 / 690 V ac
Mode of protection			6
Max Continuous Operating Voltage (L-PE)		Uc	760 V ac
Test Class according to IEC 61643-11 Ed.1 (2011-03)			I and II
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)			T1 and T2
Impulse discharge current (10/350 µs)		limp	4 kA
Charge		Q	2 As
Nominal discharge current (8/20 µs)		In	20 kA
Max. discharge current (8/20 μs)		Imax	40 kA
Voltage protection level (L-PE) at a discharge current of:	1 kA	Up	≤ 2,80 kV
	5 kA	Up	≤ 3,00 kV
	10 kA	Up	≤ 3,40 kV
	15 kA	Up	≤ 3,70 kV
	20 kA	Up	≤ 3,90 kV
Voltage protection level (L-PE) at 6 kV (1,2/50 μs)		Up	≤ 4,00 kV
Response time L-PE		ta	≤ 100 ns
End of Life (L-PE)			OCM (Open Circuit Failure Mode)
Behaviour of failure mode in case of Temporary OverVoltage (TOV):	L-PE	UT	1960 V / 200 ms, withstand (W)
Short Circuit Current rating without backup protection (internal disconnector)		Isccr	2 kA rms
Short Circuit Current rating with max. backup protection fuse			100 kA rms
Max. back-up protection with up-stream CB with a max. let-through energy of			160 A (max. 4,50 x 10 <sup>5</sup> A <sup>2</sup> s)
(max. prospective short circuit current depends on the CB breaking capability)			
Max. back-up protection with FUSE at prospective short circuit currents of			100 A gG (> 2 ÷ 100 kA rms)
Follow current interrupt rating (L-PE)		lfi	NFC No Follow Current®
Status indicator (indication of disconnector operation)			3 colours with progressive performance indication + 2 colours for GDT
Operating temperature range / Humidity			-40 +80 °C (extended) / 5% 95%
Terminal - Conductor size			4-35 mm² flexible / 4-50 mm² semi rigid
Mounting			indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715
Case material / Flammability grade			BMC / V-0 in accordance with UL 94
Pollution degree / Degree of protection		PD / IP	2 / 20 (built-in)
Approximate weight			1.260 g
Dimensions: width			140 mm (8 modules)

### Model IL 2/20 with remote signal contact

690	t	ff	3	ΙT
	-		_	

Wodor in E. Z. Zo ::: With Fornoto digital contact	000 111 011
CODE	217 234
Remote signal contact	potential-free changeover contact
Terminal - conductor size for remote signal contact	max. 1,5 mm <sup>2</sup> flexible
Switching capacity remote signal contact	ac: 250 V / 0.5 A - dc: 125 V / 0.2 A: 75 V / 0.5 A






















. 4/20 830 ff 2 IT

IL 4/20 830 ff 2 IT is a ready to install assembly of two voltage limiting and a voltage switching SPD-module, providing three modes of protection, typically installed in IT systems according to HD 60364-5-53 (e.g. in the service entrance board SEB), with the following features and benefits:

- Backup protection is not required up to an Isccr ≤ 2 kA rms;
- No leackage current to PE;
- Three colour Status Indicator with progressive indication of remaining performance / two colours for GDT.

Model IL 4/20		830 ff 2 IT
CODE		207 226
Nominal ac system voltage	Un	480 / 830 V ac

Nominal ac system voltage	Un	480 / 830 V ac
Modes of protection		3
Max Continuous Operating Voltage (L/N-PE)	Uc	915 V ac
Test Class according to IEC 61643-11 Ed.1 (2011-03)		I and II
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)		T1 and T2
Impulse discharge current (10/350 µs)	limp	4 kA
Charge	Q	2 As
Nominal discharge current (8/20 µs)	In	20 kA
Max. discharge current (8/20 µs)	Imax	40 kA
Voltage protection level (L/N-PE) at a discharge current of: 1 k	A Up	≤ 2,90 kV
5 k	A Up	≤ 3,10 kV
10 k	A Up	≤ 3,50 kV
15 k	A Up	≤ 3,80 kV
20 k	A Up	≤ 4,00 kV
Voltage protection level (L/N-PE) at 6 kv (1,2/50 μs)	Up	≤ 4,00 kV
Response time L/N-PE	ta	≤ 100 ns
End of Life (L-N)		OCM (Open Circuit Failure Mode)
Behaviour of failure mode in case of Temporary OverVoltage (TOV):	UT	2115 V / 200 ms, safe (S)
Short Circuit Current rating without backup protection (internal disconnector)	Isccr	2 kA rms
Short Circuit Current rating with max. backup protection fuse		100 kA rms
Max. back-up protection with FUSE at prospective short circuit currents of		80 A gG (> 5 ÷ 100 kA rms)
Follow current interrupt rating (L-N)	<b>l</b> fi	NFC No Follow Current®
Status indicator (indication of disconnector operation) / N-PE (no disconnector)		3 colours with progressive performance indication / 2 colours for GDT
Operating temperature range / Humidity		-40 +80 °C (extended) / 5% 95%
Terminal - Conductor size		4-35 mm² flexible / 4-50 mm² semi rigid
Mounting		indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715
Case material / Flammability grade		BMC / V-0 in accordance with UL 94
Pollution degree / Degree of protection	PD / IP	2 / 20 (built-in)
Approximate weight		280 g
Dimensions: width		53 mm (3 modules)

Model II 2/20

woder il 2/20 with remote signal contact	830 [ 11 2 11
CODE	217 226
Remote signal contact	potential-free changeover contact
Terminal - conductor size for remote signal contact	max. 1,5 mm <sup>2</sup> flexible
Switching canacity remote signal contact	ac: $250 \text{ V} / 0.5 \Delta = \text{dc} \cdot 125 \text{ V} / 0.2 \Delta \cdot 75 \text{ V} / 0.5 \Delta$

000 + ft 0 IT














140 mm (8 modules)











IL 4/20 830 ff 3 IT s a ready to install assembly of three voltage limiting and a voltage switching SPD-module, providing six modes of protection, typically installed in IT systems according to HD 60364-5-53 (e.g. in the service entrance board SEB), with the following features and benefits:

- Backup protection is not required up to an Isccr ≤ 2 kA rms;
- No leackage current to PE;
- Three colour Status Indicator with progressive indication of remaining performance / two colours for GDT.

Model IL 4/20 ... 830 ff 3 IT CODE 207 236

OODE		207 230
Nominal ac system voltage	Un	480 / 830 V ac
Modes of protection		6
Max Continuous Operating Voltage (L-PE)	Uc	915 V ac
Test Class according to IEC 61643-11 Ed.1 (2011-03)		I and II
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)		T1 and T2
Impulse discharge current (10/350 μs)	limp	4 kA
Charge	Q	2 As
Nominal discharge current (8/20 µs)	In	20 kA
Max. discharge current (8/20 μs)	Imax	40 kA
Voltage protection level (L-PE) at a discharge current of:	1 kA Up	≤ 2,90 kV
	5 kA Up	≤ 3,10 kV
1	0 kA Up	≤ 3,50 kV
1	5 kA Up	≤ 3,80 kV
	20 kA Up	≤ 4,00 kV
Voltage protection level (L-PE) at 6 kV (1,2/50 µs)	Up	≤ 4,00 kV
Response time L-PE	ta	≤ 100 ns
End of Life (L-PE)		OCM (Open Circuit Failure Mode)
Behaviour of failure mode in case of Temporary OverVoltage (TOV):	PE UT	2115 V / 200 ms, withstand (W)
Short Circuit Current rating without backup protection (internal disconnector)	Isccr	2 kA rms
Short Circuit Current rating with max. backup protection fuse		100 kA rms
Max. back-up protection with FUSE at prospective short circuit currents of		80 A gG (> 2 ÷ 100 kA rms)
Follow current interrupt rating (L-PE)	lfi	NFC No Follow Current®
Status indicator (indication of disconnector operation)		3 colours with progressive performance indication / 2 colours for GDT
Operating temperature range / Humidity		-40 +80 °C (extended) / 5% 95%
Terminal - Conductor size		4-35 mm² flexible / 4-50 mm² semi rigid
Mounting		indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715
Case material / Flammability grade		BMC / V-0 in accordance with UL 94
Pollution degree / Degree of protection	PD / IP	2 / 20 (built-in)
Approximate weight		1.260 g

### Model II 2/20 with remote signal contact

Dimensions: width

Model IL 2/20 with remote signal contact	830 t ff 3 IT
CODE	217 236
Remote signal contact	potential-free changeover contact
Terminal - conductor size for remote signal contact	max. 1,5 mm² flexible
Switching capacity remote signal contact	ac: 250 V / 0,5 A – dc: 125 V / 0,2 A; 75 V / 0,5 A





# Surge Protective Devices: ZOTUPCOMB




















IL 1/3 2P and IL 1/10 2P M are combined voltage limiting and voltage switching SPDs providing three modes of protection, typically installed in single-phase 230 V socket outlets or within equipment with the following features and benefits:

- IL 1/3 2P: T3 SPD (Type 3) according to IEC 61643-11 Ed. 2 (2025) and EN IEC 61643-11 (2025);
- IL 1/10 2P M: T2 SPD (Type 2) according to IEC 61643-11 Ed. 2 (2025) and EN IEC 61643-11 (2025);
- Equipped with a thermal disconnector, which interrupts the phase or neutral to ground path in case of an SPD failure, and with a green LED operating state indicator;
- Provided with pigtail connections to enable the IL 1/3 2P to be installed at equipment terminals or e.g. socket outlets, LED power supplies, CCTVs, intruder alarms;
- Suitable for installation at LPZ boundaries 2 3 or higher according to the lightning protection zones concept and in coordination with other SPDs.

Model IL			1/3 2P	1/10 2P M	
CODE			241 001	241 002	
Nominal ac system Voltage			23	80 V ac	
Modes of protection				3	
Maximum Continuous Operating Voltage		Uc	275 V ac	335 V ac	
Test Class according to IEC 61643-11 Ed.1 (2011-03)			III	II	
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)			T3	T2	
Max. backup protection with fuse, if not already installed			10	6 A gG	
Combination wave impulse (1,2/50 µs, 8/20 µs)			6 kV / 3 kA	-	
Nominal discharge current (8/20 µs) (L / N- PE)		ln	-	10 kA	
Maximum discharge current (8/20 μs) (L / N-PE)		Imax	-	20 kA	
Total discharge current (8/20 μs) (L + N-PE)		ITotal	-	20 kA	
Voltage protection level (L-N; L / N-PE)		Up	≤ 1,5 kV		
Response time		ta	≤ 25 ns (L-N); ≤ 100 ns (L / N-PE)		
End of Life			OCM (open ci	rcuit failure mode)	
Short circuit current rating with max. backup protection with fuse		Isccr	6 kA rms		
Follow current interrupt rating			NFC No Follow Current®		
Behaviour in case of Temporary OverVoltage (TOV):	L-N	UT	335 V / 5 s, withstand (W);	440 V / 120 min, withstand (W)	
	L-PE	UT	1455 V / 2	00 ms, safe (S)	
	N-PE	UT	1200 V / 200	ms, withstand (W)	
Operating temperature range			- 40 .	+ 70 °C	
Operating state indicator			gre	en LED	
Connecting wires			1,5 mm	<sup>2</sup> ; l=100 mm	
Enclosure material			therr	noplastic	
Dimensions			I 43 x h 32 x d 22 mm	l 48 x h 43 x d 24 mm	
Pollution Degree / Degree of protection		PD / IP	2	2 / 20	
Approximate weight			30 g	50 g	



























N/PE

L 2/20 230 e is a pluggable execution of a voltage limiting SPD, providing a single mode of protection, typically installed in Sub Distribution Boards (SDB) in TN-systems. It provides the following features and benefits:

- T2 SPD (Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- L 2/20 230 e is a voltage limiting varistor based SPD, for the protection of low voltage installations and equipment against
  indirect lightning effects;
- · Short circuit current withstand of 50 kA rms with max. back-up fuse;
- NFC No Follow Current® technology, there are no follow currents drawn from the power supply system after operation.


Model L 2/20			230 е
CODE			220 001
Nominal ac system voltage		Un	230/400 V ac
Modes of protection (number of poles)			1
Max Continuous Operating Voltage		Uc	335 V ac
Test Class according to IEC 61643-11 Ed.1 (2011-03)			ll l
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)			T2
Nominal discharge current (8/20 µs)		In	20 kA
Max. discharge current (8/20 μs)		Imax	40 kA
/oltage protection level at a discharge current of:	1 kA	Up	≤ 0,90 kV
	5 kA	Up	≤ 1,05 kV
	10 kA	Up	≤ 1,25 kV
	20 kA	Up	≤ 1,40 kV
Response time		ta	≤ 25 ns
End of Life			OCM (open circuit failure mode)
Behaviour of failure mode in case of Temporary OverVoltage (TOV) L-(PE)	N o L-N	UT	335 V / 5 s, withstand (W); 440 V / 120 min, safe (S)
Max. back-up protection with FUSE			125 A gG
Short Circuit Current rating with max. backup protection with fuse		Isccr	50 kA rms
Follow current interrupt rating		lfi	NFC No Follow Current®
Status indicator (indication of disconnector operation)			2 colours: transparent - OK / red - replace
Operating temperature range / Humidity			-40 +70 °C / 5% 95%
Ferminal - Conductor size			4-25 mm² flexible / 4-25 mm² semi rigid
Busbar connections			fork-type busbar 16 mm <sup>2</sup>
Mounting			indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715
Case material / Flammability grade			Polyamide PA6 / V-0 in accordance with UL 94
Pollution degree / Degree of protection		PD / IP	2 / 20 (built-in)
Approximate weight			100 g
Dimensions: width			17,5 mm (1 module)
Certifications			CB, STC issued by OVE

















2/20 230 1+1

L 2/20 230 1+1 is a ready to install assembly of a voltage limiting and a voltage switching SPD providing three modes of protection, typically installed in Sub Distribution Boards (SDBs) for single-phase 230 V TT-systems where connection type CT2 (1+1) is required according to HD 60364-5-53, with the following features and benefits:

- T2 SPD (Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- Short circuit current withstand of 50 kA rms with max. back-up fuse;
- NFC No Follow Current® technology, there are no follow currents drawn from the power supply system after operation.

Model L 2/20			230 1	I+1		
CODE			200 (	023		
Nominal ac system voltage			230 V ac			
Modes of protection			3			
Max Continuous Operating Voltage (L-N)		Uc	335 V	ac ac		
Max Continuous Operating Voltage (N-PE)		Uc	255 V	ac ac		
Test Class according to IEC 61643-11 Ed.1 (2011-03)			II.			
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)			T2			
Nominal discharge current (8/20 µs) (L-N)		In	20 k	¢A		
Nominal discharge current (8/20 µs) (N-PE)		In	40 H	cA .		
Max. discharge current (8/20 μs) (L-N)		Imax	40 H	¢A		
Max. discharge current (8/20 μs) (N-PE)		Imax	60 H	¢A		
Voltage protection level (L-N, L-PE) at a discharge current of:	1 kA	Up	≤ 1,00 kV	≤ 1,60 kV		
	5 kA	Up	≤ 1,10 kV	≤ 1,60 kV		
	10 kA	Up	≤ 1,30 kV	≤ 1,60 kV		
	20 kA	Up	≤ 1,45 kV	≤ 1,60 kV		
Voltage protection level (N-PE)		Up	≤ 1,60	) kV		
Response time (L-N / N-PE)		ta	≤ 25 ns / ≤	≤ 100 ns		
End of Life (L-N)			OCM (open circui	it failure mode)		
Behaviour in case of Temporary OverVoltage (TOV):	L-N	UT	335 V / 5 s, withstand (W);	440 V / 120 min, safe (S)		
	N-PE	UT	1200 V / 200 ms	, withstand (W)		
Short Circuit Current rating with max. backup protection with fuse		Isccr	50 kA	rms		
Max. back-up protection with FUSE			125 A gG			
Follow current interrupt rating (L-N)		lfi	NFC No Follo	w Current®		
Follow current interrupt rating (N-PE)		lfi	100 A	rms		
Status indicator (indication of disconnector operation)			2 colours: transparent	- OK / red - replace		
Operating temperature range / Humidity			-40 +70 °C	/ 5% 95%		
Terminal - Conductor size			4-25 mm² flexible / 4	-40 mm² semi rigid		
Mounting			indoor, 35 x 7,5 mm top ha	at DIN rail IEC/EN 60715		
Case material / Flammability grade			Polyamide PA6 / V-0 in a	ccordance with UL 94		
Pollution degree / Degree of protection		PD / IP	2 / 20 (built-in)			
Approximate weight			170	0		
Dimensions: width			35 mm (2 i			
Certifications			CB, STC issu	ed by OVE		

Model L 2/20 with remote signal contact	230 t 1+1
CODE	210 023
Remote signal contact	potential-free changeover contact
Terminal - conductor size for remote signal contact	max. 1,5 mm² flexible
Switching capacity remote signal contact	ac: 250 V / 0,5 A - dc: 125 V / 0,2 A; 75 V / 0,5 A














/20 230 3+1











L 2/20 230 3+1 is a ready to install assembly of three voltage limiting and a voltage switching SPD providing ten modes of protection. Typically installed in Sub Distribution Boards (SDBs) for three-phase plus neutral 230/400 V TT-systems where connection type CT2 (3+1) is required according to HD 60364-5-53, with the following features and benefits:

- T2 SPD (Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- Short circuit current withstand of 50 kA rms with max. back-up fuse;
- NFC No Follow Current® technology, there are no follow currents drawn from the power supply system after operation.

Model L 2/20 ... 230 3+1 CODE

WIOGOT L 2/20			200 0	/ I I		
CODE			200 0	)25		
Nominal ac system voltage		Un	230/400 V ac			
Modes of protection			10			
Max Continuous Operating Voltage (L-N)			335 V ac			
Max Continuous Operating Voltage (N-PE)		Uc	255 V	ac		
Test Class according to IEC 61643-11 Ed.1 (2011-03)			li li			
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (20	025)		T2			
Nominal discharge current (8/20 µs) (L-N)		In	20 k	A		
Nominal discharge current (8/20 µs) (N-PE)		In	40 k	A		
Max. discharge current (8/20 μs) (L-N)		Imax	40 k	A		
Max. discharge current (8/20 μs) (N-PE)		Imax	60 k	A		
Voltage protection level (L-N, L-PE) at a discharge current of:	1 kA	Up	≤ 1,00 kV	≤ 1,60 kV		
	5 kA	Up	≤ 1,10 kV	≤ 1,60 kV		
	10 kA	Up	≤ 1,30 kV	≤ 1,60 kV		
	20 kA	Up	≤ 1,45 kV	≤ 1,60 kV		
Voltage protection level (N-PE)		Up	≤ 1,60	≤ 1,60 kV		
Response time (L-N / N-PE)		ta	≤ 25 ns / ≤	100 ns		
End of Life (L-N)			OCM (open circuit	OCM (open circuit failure mode)		
Behaviour in case of Temporary OverVoltage (TOV):	L-N	UT	335 V / 5 s, withstand (W); 4	440 V / 120 min, safe (S)		
	N-PE	UT	1200 V / 200 ms,	withstand (W)		
Short Circuit Current rating with max. backup protection with fuse		Isccr	50 kA	rms		
Max. back-up protection with FUSE			125 A	gG		
Follow current interrupt rating (L-N)		lfi	NFC No Follow	v Current®		
Follow current interrupt rating (N-PE)		lfi	100 A	rms		
Status indicator (indication of disconnector operation)			2 colours: transparent	- OK / red - replace		
Operating temperature range / Humidity			-40 +70 °C	/ 5% 95%		
Terminal - Conductor size			4-25 mm² flexible / / 4	l-40 mm² semi rigid		
Mounting			indoor, 35 x 7,5 mm top ha	t DIN rail IEC/EN 60715		
Case material / Flammability grade			Polyamide PA6 / V-0 in accordance with UL 94			
Pollution degree / Degree of protection		PD / IP	2 / 20 (built-in)			
Approximate weight			360	g		
Dimensions: width			70 mm (4 n	,		
Certifications			CB, STC issue	ed by OVE		

Model L 2/20 with remote signal contact	230 t 3+1
CODE	210 025
Remote signal contact	potential-free changeover contact
Terminal - conductor size for remote signal contact	max. 1,5 mm² flexible
Switching capacity remote signal contact	ac: 250 V / 0,5 A - dc: 125 V / 0,2 A; 75 V / 0,5 A



### Surge Protective Devices: **ZOTUPACCESSORIES**




F

CP 1 is an insulated extension clamp with 3 wire terminations and enables a V-connection even if the SPD is not equipped with double clamps. CP1 can be assembled on the SPD's PE terminal as well as on phase or neutral terminals.

### Model CP 1

CODE	249 591
Wire terminations per unit	1 ~ 3
Nominal current	125 A
Material	copper
max. conductor size	3 x 16 mm <sup>2</sup>

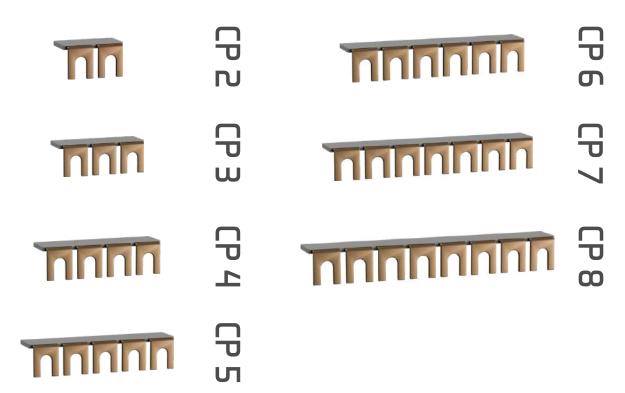

CP2 to CP8 are fork-type busbars with 2 up to 8 connection points. Typical application: to provide a common PE connection for several SPDs. In TT system applications these busbars can also be used to provide a common neutral point connection to N-PE SPDs type I 12, I 52 and I 100.

Model CP	2	3	4	5	6	7	8	
CODE	249 592	249 593	249 594	249 595	249 596	249 597	249 598	
Number of connection points	2	3	4	5	6	7	8	
Nominal current		125 A						
Material	copper							
Cross section	16 mm₂							



SPDs FOR ALTERNATING CURRENT (AC)
WITH ADDITIONAL FILTER



# SURGE PROTECTION FROM DIRECT AND INDIRECT LIGHTNING EFFECTS WITH ADDITIONAL FILTER FOR REDUCTION OF HIGH FREQUENCY ELECTROMAGNETIC INTERFERENCES. IDEAL FOR DATA CENTER, CED AND DCS PROTECTION.

The impact of data center outages or even damages demands to adopt comprehensive protection measures. Atmospheric overvoltages and high frequence electromagnetic interference can cause "catastrophic" incidences, thus good and effective protection is essential. The tremendous costs caused by data center blackouts have made it necessary to carry out specific studies towards this issue. Statistical reporting of the costs, which are generally expressed in Amount Lost for Record (Setting), has been ongoing for several years in the USA and in UK.

In 2019 the Ponemon Institute of Michigan estimated a loss of  $\in$  240- Amount Lost for Record. On the occurrence of the worst event, the total loss was estimated at  $\in$  8.200.000,- in USA and at  $\in$  4.490.000,- in UK. The same Institute, based on an item by item analysis of 51 cases of blackouts in medium to large size data centers that are operating in 15 different industrial and service sectors, has found that the average downtime is about 130 minutes and costs businesses up to  $\in$  540.000- each, equal to a loss of  $\in$  4.150 per minute. For businesses operating in the area of telecommunications and E-commerce, losses can be even higher. These numbers speak for themselves and clearly explain why protection must be achieved at the maximum level possible and needs to be considered right from the planning phase.



Data Center Protection realised with 4 parallel connected ILF 4P 400 SPDs.



Data Center Protection realised with an ILF 4P 250, installed in the course of refurbishment.

Direct Lightning phenomena are the main cause of disastrous events, while indirect lightning effects and electrical high frequency interferences are also a source of damage whose origin is often not easy to identify, but their destructive effects are terrible for facilities where availability and reliability is crucial.

All these phenomena need to be identified in order to properly protect facilities connected to the power system and to ensure integrity and continuty of operation. This aspect is particularly relevant in the protection of servers located in Data Centers, CED, TLC or DCS plants and for the control of industrial processes.

Due to all these aspects, it is necessary to use protective devices in such facilities and plants, which are not only designed to protect against direct or indirect lightning effects (high performance SPDs), but which also provide additional filtering that is able to significantly reduce electromagnetic interference. Based on conservative consideration such filters are required to cover a frequecy range from 150 kHz up to 30 MHz.



# SPDs FOR ALTERNATING CURRENT (AC) WITH ADDITIONAL FILTER


SPD	Model	Application Icon	Туре	Modes of protection	Impulse discharge current l <sub>imp</sub>	Nominal discharge current l <sub>n</sub>	Page
	ILF 4P 250	<b>♥ ♥</b>	T1, T2 and T3	10	12,5 kA	25 kA	92
	ILF 4P 400	<b>1 1 1 1 1 1 1 1 1 1</b>	T1, T2 and T3	10	12,5 kA	25 kA	92
	ILF 4P 40	<b>5</b> MM	ТЗ	10	-	3 kA	94
	ILF 4P 63	<b>5</b>	ТЗ	10	-	3 kA	94
	ILF 4P 80	<b>5</b> MM	ТЗ	10	-	3 kA	94
	ILF 4P 125	<b>5</b>	ТЗ	10	-	3 kA	94
	ILF 2P 40	<b>5</b> ••••	ТЗ	3	-	3 kA	96
	ILF 2P 63	<b>5</b> ••••	ТЗ	3	-	3 kA	96
	ILF 2P 80	<b>*</b>	ТЗ	3	-	3 kA	96
	ILF 2P 10 t DIN	<b>5</b> ••••	ТЗ	3	-	3 kA	98
A A	ILF 2P 16 t DIN	<b>5</b> ••••	ТЗ	3	-	3 kA	98
	ILF 2P 25 t DIN	<b>5</b> ••••	ТЗ	3	-	3 kA	98















ILF 4P 250/400 is a multimode SPD against direct and indirect lightning effects with integrated interference filter for high frequency disturbances, typically installed in in three phase plus neutral TN systems for the protection of Control Rooms, Data Centers or EDPs, with the following features and benefits:

- T1, T2 and T3 SPD (Type 1, Type 2 and Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11(2025);
- Although a special inductor ensures an effective attenuation of high frequency interferences, it has an insignificant energy
  insertion loss as compared to the no-load losses and the efficiency of an insulation transformer.


Vivil   Vi	Model ILF 4P			250	400		
Maximum Continuous operating voltage   Uc   335/570 V - 50 Hz	CODE			219 374	219 344		
Modes of protection   1	Nominal ac system Voltage		Un	230/400 \	/ - 50 Hz		
Rated load current   Rate   Rated	Maximum Continuous operating voltage		Uc	335/570 V - 50 Hz			
First Class according to IEC 61643-11 Ed.1 (2011-03)   It and III	Modes of protection			10	0		
Type according to IEC 61643-11 Ed. 2(2025) and EN IEC 61643-11 (2025)   The total discharge current (107350 μs) (L1-L2+L3+N-PE)   The total growth of the total discharge current (107350 μs) (L1-N)   Illimp   12,5 kA	Rated load current		lL	250 A	400 A		
Total discharge current (10/350 µs) (L+124-L3+N-PE)   Inequilibrium (10/350 µs) (L-1) (10/350 µs) (L-1) (10/350 µs) (N-PE)   Inequilibrium (10/350 µs) (N	Test Class according to IEC 61643-11 Ed.1 (2011-03)			I, II ai	nd III		
Impulse discharge current (10/350 μs) (L+N)   Impulse discharge current (10/350 μs) (N-PE)   Impulse discharge current (8/20 μs) (N-PE)   Impulse (N-PE)	Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-	11 (2025)		T1,T2 a	and T3		
Image   So kA	Total discharge current (10/350 µs) (L1+L2+L3+N-PE)		Total 10/350	50	kA		
Trotal discharge current (8/20 μs) (1.1+1.2+1.3+N-PE)   Trotal 8/20	Impulse discharge current (10/350 µs) (L-N)		limp	12,5	i kA		
In   25 kA	Impulse discharge current (10/350 μs) (N-PE)		limp	50	kA		
Combination wave impulse (L/N-PE)	Total discharge current (8/20 µs) (L1+L2+L3+N-PE)		Total 8/20	100	kA		
Combination wave impulse (L-N)	Nominal discharge current (8/20 µs)		In	25	kA		
Voltage protection level at a discharge current of (8/20 μs)	Combination wave impulse (L/N-PE)		Ucc	6 kV /	3 kA		
S kA   Up	Combination wave impulse (L-N)		Ucc	6 kV /	3 kA		
12,5 kA Up ≤ 875 V ≤ 900 V	Voltage protection level at a discharge current of (8/20 µs)	1kA	Up	≤ 800 V	≤ 825 V		
20 kA   Up   ≤ 925V   ≤ 950 V     25 kA   Up   ≤ 975V   ≤ 1000 V     26 kB   Up   ≤ 850 V   ≤ 900 V     27 kB   V   V   V   V   V   V   V   V   V		5 kA	Up	≤ 825 V	≤ 850 V		
25 kA   U <sub>D</sub>   ≤ 975V   ≤ 1000 V		12,5 kA	Up	≤ 875 V	≤ 900 V		
25 kA   Up   ≤ 975V   ≤ 1000 V		20 kA	Up	≤ 925V	≤ 950 V		
Voltage protection level at combination wave impulse   (L-N)   Up   ≤ 850 V   ≤ 900 V		25 kA		≤ 975V	≤ 1000 V		
N-PE   Up   ≤ 1250V   ≤ 1500V	Voltage protection level at combination wave impulse	_	- 1				
Response time (L-N)         ta         ≤ 25 ns           Response time (N-PE)         ta         ≤ 100 ns           End of Life (L-N)         OCM (open circuit failure mode)           Behaviour in case of Temporary OverVoltage (TOV)	Totago protocolor lovor at comamaton mayo impaico	. ,					
$ \begin{array}{c} \text{Cend of Life (L-N)} \\ \text{Sehaviour in case of Temporary OverVoltage (TOV)} \\ \text{L/N-PE} \\ \text{Short Circuit Current rating with max. backup protection} \\ \text{Sincer} \\ \text{Solution Current interrupt rating} \\ \text{Asymmetric attenuation } 50 \ \Omega / 50 \ \Omega \\ \text{Symmetric attenuation } 50 \ \Omega \\ \text{Symmetric attenuation } 50 \ \Omega / 50 \ \Omega \\ \text{Symmetric attenuation } 50 \ \Omega \\ Sym$	Response time (L-N)	(11 1 =)	-1				
Behaviour in case of Temporary OverVoltage (TOV) L/N-PE Short Circuit Current rating with max. backup protection $  s_{cor}   S_{cor}  $	Response time (N-PE)		ta	≤ 10	0 ns		
Behaviour in case of Temporary OverVoltage (TOV) L/N-PE Short Circuit Current rating with max. backup protection $  s_{cor}   S_{cor}  $	End of Life (L-N)			OCM (open circu	it failure mode)		
Short Circuit Current rating with max. backup protection $ Sccr                                   $	Behaviour in case of Temporary OverVoltage (TOV)						
Follow current interrupt rating $Asymmetric attenuation 50 \Omega / 50 \Omega$ f at 2 MHz: $\geq$ 78 dB at 0,2 MHz: $\geq$ 73 dB at 0,2 MHz: $\geq$ 73 dB at 0,2 MHz: $\geq$ 71 dB at 0,2 MHz: $\geq$ 73 dB at 0,2 MHz: $\geq$ 71 dB at 0,2 MHz: $\geq$ 73 dB at 0,2 MHz: $\geq$ 71 dB dE at 0,2 MHz: $\geq$ 71 dB at 0,2 MHz: $\geq$			UT	335 V / 5 s, withstand (W);	440 V / 120 min, safe (S)		
Asymmetric attenuation $50 \Omega / 50 \Omega$ f at $2 \text{ MHz}: \ge 78 \text{ dB}$ at $0,2 \text{ MHz}: \ge 73 \text{ dB}$ at $0,2 \text{ MHz}: \ge 73 \text{ dB}$ at $0,2 \text{ MHz}: \ge 71 \text{ dB}$ Filter components $ \begin{array}{c} Cx_1, Cx_2 \\ CY \\ Rx, Ry \\ LSYM \\ LASYM \\ LASYM \\ LASYM \\ LASYM \\ A,3 \muH \\ LASYM \\ LASYM \\ A,3 \muH \\ 2,4 \muH \\ 1,1 \text{ mH} \end{array} $ Power dissipation at $20^{\circ}\text{C}$ (ventilated)  Poperating temperature range  Ferminal - Conductor size $ \begin{array}{c} 35-240 \text{ mm}^2 / 35 \text{ Mm}^2 \\ 26 \text{ Nm}; 150-240 \text{ mm} / 55 \text{ Nm} \end{array} $ Wounting  Finctosure material  Pollution Degree / Degree of protection  PD / IP  Remote signal contact  Approximate weight  f at $2 \text{ MHz}: \ge 73 \text{ dB}$ at $0,2  MHz$	Short Circuit Current rating with max. backup protection		Isccr	50 kA	rms		
Filter components $ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	Follow current interrupt rating			NFC N	o Follow Current®		
Filter components $ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	Asymmetric attenuation 50 $\Omega$ / 50 $\Omega$		f	at 2 MHz: ≥ 78 dB	at 2 MHz: ≥ 73 dB		
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	Symmetric attenuation 50 $\Omega$ / 50 $\Omega$		f	at 0,2 MHz: ≥ 73 dB	at 0,2 MHz: ≥ 71 dB		
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	Filter components		Cx1, Cx2	2,2 μF	2,2 μF		
LSYM LASYM 4,3 µH 2,4 µH 1,1 mH  Power dissipation at 20°C (ventilated)  Max. back-up protection with fuse, if not already provided in the upstream installation Deparating temperature range  Terminal - Conductor size  Mounting  Mounting  Enclosure material  Pollution Degree / Degree of protection  Approximate weight  A,3 µH 2,4 µH 1,1 mH 2,4 µH 2,3 µH 2,3 µH 2,3 mH 1,1 mH 2,4 µH 2,4 µH 1,1 mH 2,4 µH 1,1 mH 2,6 NW ≤ 380 W  Approximate weight  Approximate weight  Approximate weight			Cy	2 x 50 nF	2 x 50 nF		
LSYM LASYM 4,3 $\mu$ H 2,4 $\mu$ H 1,1 $\mu$ H 2,4 $\mu$ H 2,4 $\mu$ H 2,4 $\mu$ H 2,3 $\mu$ H 2,3 $\mu$ H 1,1 $\mu$ H 2,4 $\mu$ H 2,3 $\mu$ H 2,3 $\mu$ H 1,1 $\mu$ H 2,4 $\mu$ H 2,4 $\mu$ H 2,3 $\mu$ H 2,3 $\mu$ H 1,1 $\mu$ H 2,4 $\mu$ H 2,4 $\mu$ H 2,4 $\mu$ H 1,1 $\mu$ H 2,4 $\mu$ H 2,3 $\mu$ H 2,3 $\mu$ H 1,1 $\mu$ H 2,4 $\mu$ H 1,1 $\mu$ H 2,4 $\mu$ H 2,3 $\mu$ H 2,3 $\mu$ H 3,5 $\mu$ H 3,6 $\mu$ H 3,7 $\mu$ H			Rx , Ry	1 ΜΩ	1 ΜΩ		
LASYM  2,3 mH  1,1 mH  Power dissipation at 20°C (ventilated)  ≤ 160 W  ≤ 380 W  Max. back-up protection with fuse, if not already provided in the upstream installation  Departing temperature range  - 40 + 55 °C  Terminal - Conductor size  35-240 mm² (35-120 mm² / 26 Nm; 150-240 mm / 55 Nm)  Wounting  Enclosure material  Pollution Degree / Degree of protection  PD / IP  2 / 10  Remote signal contact  Approximate weight  Approximate weight  1,1 mH  1,1 mH  2,1 mH  1,1 mH  2,1 mH  2,1 mH  380 W  400 A gG  40				4.3 uH	2.4 uH		
Power dissipation at 20°C (ventilated)  ✓ 160 W ✓ 380 W  Max. back-up protection with fuse, if not already provided in the upstream installation  Operating temperature range  — 40 + 55 °C  Terminal - Conductor size  — 35-240 mm² (35-120 mm² / 5-240 mm² (35-120 mm² / 26 Nm; 150-240 mm / 55 Nm)  Mounting  Enclosure material  Pollution Degree / Degree of protection  PD / IP  Approximate weight  — 40 + 55 °C  — 35-240 mm² (35-120 mm² / 5-240 mm² (35-120 mm² / 26 Nm; 150-240 mm / 55 Nm)  Vertical on a panel / wall (natural convection required)  — metal  2 / 10  NC (max. 1,5 mm² flexible; ac: 250 V/0,5 A; dc: 125 V/0,2 A; 75 V/0,5 A)  — Approximate weight			LASYM	' !	′ ¹		
Max. back-up protection with fuse, if not already provided in the upstream installation  Departing temperature range  - 40 + 55 °C  Terminal - Conductor size  Terminal - Conductor size  Approximate weight  250 A gG  400 A gG  400 A gG  400 A gG  400 A gG  5-240 mm² (35-120 mm² / 55 °C  35-240 mm² (35-120 mm² / 52-120 mm² / 52-240 mm² (35-120 mm² / 55 Nm)  45-240 mm / 55 Nm)  46-240 mm / 55 Nm)  46-240 mm / 55 Nm)  46-240 mm / 55 Nm)  47-240 mm / 55 Nm)  48-240 mm² (35-120 mm² / 52-240 mm² / 55 Nm)  48-240 mm² (35-120 mm	Power dissipation at 20°C (ventilated)			,-	,		
Comparison of the presenting temperature range	, , ,	m installation					
Service   35-240 mm² (35-120 mm² / 5-240 mm² (35-120 mm² / 26 Nm; 150-240 mm / 55 Nm)   26 Nm; 150-240 mm / 55 Nm)   26 Nm; 150-240 mm / 55 Nm)   Vertical on a panel / wall (natural convection required)   metal   Pollution Degree / Degree of protection   PD / IP   2 / 10   PD / IP   2 / 10   PD / IP   P							
26 Nm; 150-240 mm / 55 Nm) Vertical on a panel / wall (natural convection required) Enclosure material Pollution Degree / Degree of protection Remote signal contact Approximate weight  26 Nm; 150-240 mm / 55 Nm) Vertical on a panel / wall (natural convection required)  metal 2 / 10 NC (max. 1,5 mm² flexible; ac: 250 V/0,5 A; dc: 125 V/0,2 A; 75 V/0,5 A) Approximate weight	Terminal - Conductor size						
Mounting vertical on a panel / wall (natural convection required)  Enclosure material metal  Pollution Degree / Degree of protection PD / IP 2 / 10  Remote signal contact NC (max. 1,5 mm² flexible; ac: 250 V/0,5 A; dc: 125 V/0,2 A; 75 V/0,5 A)  Approximate weight 9,6 kg 11 kg				, the state of the	'		
Enclosure material metal  Pollution Degree / Degree of protection PD / IP 2 / 10  Remote signal contact NC (max. 1,5 mm² flexible; ac: 250 V/0,5 A; dc: 125 V/0,2 A; 75 V/0,5 A)  Approximate weight 9,6 kg 11 kg	Mounting			, , , , , , , , , , , , , , , , , , , ,	, ,		
Pollution Degree / Degree of protection PD / IP 2 / 10 Remote signal contact NC (max. 1,5 mm² flexible; ac: 250 V/0,5 A; dc: 125 V/0,2 A; 75 V/0,5 A) Approximate weight 9,6 kg 11 kg	Enclosure material				• /		
Remote signal contact NC (max. 1,5 mm² flexible; ac: 250 V/0,5 A; dc: 125 V/0,2 A; 75 V/0,5 A)  Approximate weight 9,6 kg 11 kg	Pollution Degree / Degree of protection		PD / IP				
Approximate weight 9,6 kg 11 kg	Remote signal contact						
Dimensions 1 530 x h 202 x d 160 mm	Approximate weight						
	Dimensions			I 530 x h 202	x d 160 mm		



### Asymmetric and symmetric attenuation characteristics





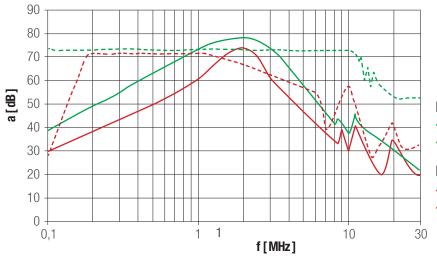



ILF 4P 250 Code 219 374
—— asymmetric
—— symmetric


ILF 4P 400 Code 219 344


asymmetric

symmetric

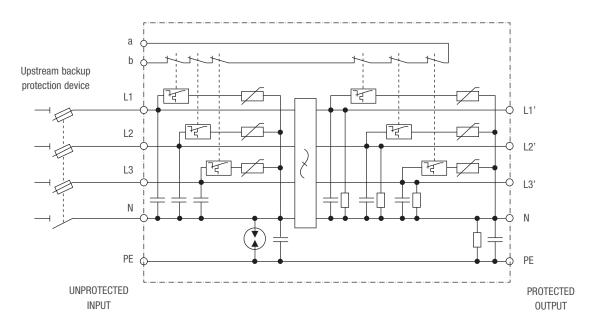



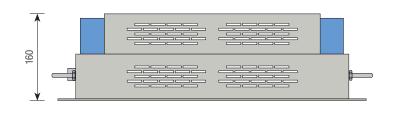

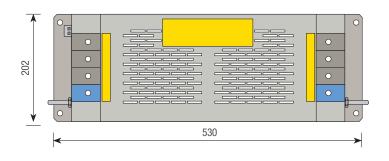








L1 L2 L3 N









- T3 SPD (Type 3) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11(2025);
- Protects electronic equipment (PLC or computers, etc.) from overvoltages due to indirect lightning effects and from other interferences;
- In case of an SPD reaching its end of life the protection is disconnected without interrupting the downstream supply. This is indicated locally by an optical indicator and via a remote signal contact;
- It is suitable for installation at LPZ boundaries 2 -3 and higher, in accordance with the lightning protection zones concept and in coordination with other SPDs.


Model ILF 4P			40	63	80	125	
CODE			219 334	219 354	219 384	219 314	
Nominal ac system Voltage		Un		230/400 V - 50 Hz			
Maximum Continuous Operating Voltage				275/480 \	/ - 50 Hz		
Modes of protection				10	)		
Rated load current		lL	40 A	63 A	80 A	125 A	
Test Class according to IEC 61643-11 Ed.1 (2011-03)				II			
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 616	643-11 (2025)			T	3		
Combination wave impulse (L/N-PE)		Uoc		6 kV /	3 kA		
Voltage protection level (L/N-PE)		Up		≤ 1,	5 kV		
Response time (L-N)		ta		≤ 25	ins		
Response time (N-PE)		ta		≤ 10	0 ns		
End of Life (L-N)				OCM (open circu	it failure mode)		
Behaviour in case of Temporary OverVoltage (TOV):			335 V / 5 s, withstand (W); 440 V / 120 min, safe (S)				
Asymmetric attenuation			range 0,4 - 10 MHz: ≥ 40 dB / at 3 MHz: ≥ 80 dB				
Filter components		Cx1	150 nF	150 nF	150 nF	150 nF	
·		Cx2	680 nF	680 nF	680 nF	680 nF	
		CY	2 x 47 nF	2 x 47 nF	2 x 47 nF	2 x 47 nF	
		L	8 μΗ	6 μH	1,4 mH	1,0 mH	
Power dissipation			≤ 8 W	≤ 12 W	≤ 15 W	≤ 20 W	
Max. back-up protection with fuse, if not already provided in the up	stream installation		40 A gG	63 A gG	80 A gG	125 A gG	
Status indicator (indication of disconnector operation)			_	LED off - OK; Re	d LED - replace		
Operating temperature range			- 40 + 55 °C				
Terminal - Conductor size			10 mm <sup>2</sup>	10 mm <sup>2</sup>	25 mm <sup>2</sup>	35 mm <sup>2</sup>	
Mounting				vertical on a	panel / wall		
Enclosure material				meta			
Pollution Degree / Degree of protection		PD/IP	2/10				
Remote signal contact			NC				
Terminal - Conductor size for remote signal contact			max. 1,5 mm² flexible				
Switching capacity remote signal contact				250 V / 0,5 A - dc: 12	, ,		
Approximate weight			1590 g	1700 g	1950 g	2820 g	
Dimensions			l 250 x h 15	0 x d 65 mm	I 290 x h 18	0 x d 75 mm	






### Asymmetric attenuation characteristics




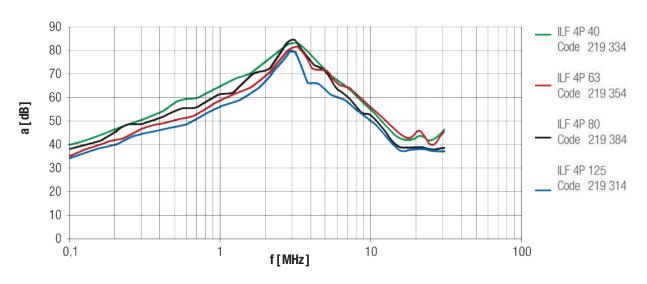


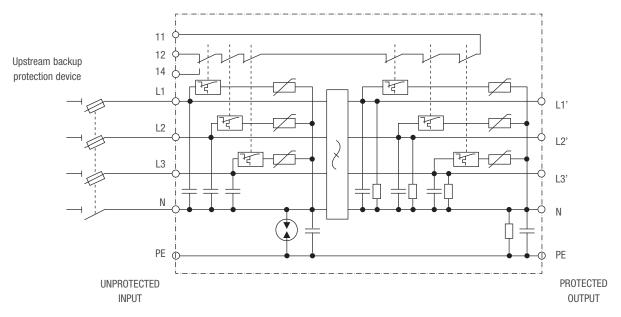





ILF 4P 63 Code 219 354









ILF 4P 80 Code 219 384


ILF 4P 125 Code 219 314













LF 2P...

ILF 2P is a multimode SPD against indirect lightning effects with integrated interference filter for high frequency disturbancies, typically installed in single phase TN-systems close to equipment or machinery, particularly in industrial automation environment, with the following features and benefits:

- T3 SPD (Type 3) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11(2025);
- Protects electronic equipment (PLC or computers, etc.) from overvoltages due to indirect lightning effects and from other interferences;
- In case of an SPD reaching its end of life the protection is disconnected without interrupting the downstream supply. This is indicated locally by an optical indicator and via a remote signal contact;
- It is suitable for installation at LPZ boundaries 2 -3 and higher, in accordance with the lightning protection zones concept and in coordination with other SPDs.


Model ILF 2P		40	63	80		
CODE		219 330	219 350	219 380		
Nominal ac system Voltage	Un	230 V - 50 Hz				
Maximum Continuous Operating Voltage	Uc		275 V - 50 Hz			
Modes of protection			3			
Rated load current	lL	40 A	63 A	80 A		
Test Class according to IEC 61643-11 Ed.1 (2011-03)			III			
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)			T3			
Combination wave impulse (L/N-PE)	Uoc		6 kV / 3 kA			
Voltage protection level (L/N-PE)	Up		≤ 1,5 kV			
Response time (L-N)	ta		≤ 25 ns			
Response time (N-PE)	ta		≤ 100 ns			
End of Life (L-N)			1 (open circuit failure m			
Behaviour in case of Temporary OverVoltage (TOV):	UT	,	thstand (W); 440 V / 12	, (-)		
Asymmetric attenuation		0 /	$10 \text{ MHz:} \geq 50 \text{ dB} / \text{at } 3 \text{ N}$			
Filter components	Сх	150 nF	220 nF	220 nF		
	CY	22 nF	22 nF	22 nF		
	L	2,2 mH	2,2 mH	1,4 mH		
Power dissipation		≤ 4 W	≤ 9 W	≤ 12 W		
Max. back-up protection with fuse, if not already provided in the upstream installation		40 A gG	63 A gG	80 A gG		
Operating temperature range			- 40 + 55 °C			
Terminal - Conductor size		10 mm <sup>2</sup>	10 mm <sup>2</sup>	25 mm <sup>2</sup>		
Mounting			vertical on a panel / wall			
Enclosure material			metallic			
Pollution Degree / Degree of protection	PD / IP		2/10			
Remote signal contact			NC			
Terminal - Conductor size for remote signal contact			max. 1,5 mm <sup>2</sup> flexible			
Switching capacity remote signal contact			ac: 250 V / 0,5 A - dc: 125 V / 0,2 A; 75 V / 0,5 A			
Approximate weight		720 g	1450 g	1520 g		
Dimensions			l 250 x h 150 x d 65 mm	1		








### Asymmetric attenuation characteristics



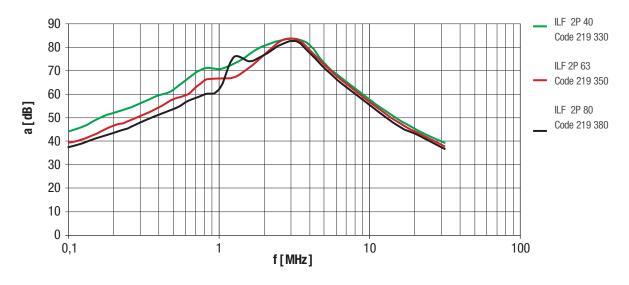

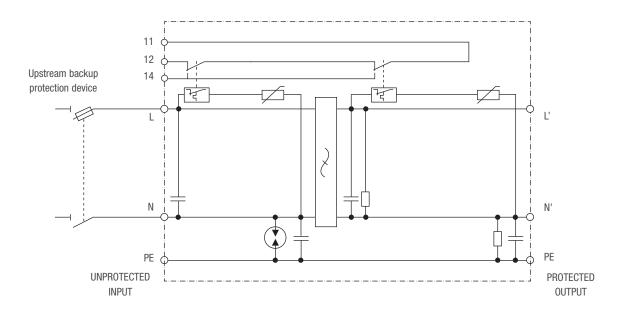















/PE

ILF 2P ... DIN is a multimode SPD against indirect lightning effects with integrated interference filter for high frequency disturbancies, typically installed in single phase TN and TT systems close to equipment or machinery, particularly in industrial automation environment, with the following features and benefits:

- T3 SPD (Type 3) according to IEC 61643-11 Ed. 2 (2025) and EN IEC 61643-11 (2025);
- Protects electronic equipment (PLC or computers, etc.) from overvoltages due to indirect lightning effects and from other interferences;
- In case of an SPD reaching its end of life the protection is disconnected without interrupting the downstream supply. This
  is indicated locally by two colours status indicator and via a remote signal contact;
- It is suitable for installation at LPZ boundaries 2 -3 and higher, in accordance with the lightning protection zones concept
  and in coordination with other SPDs;
- . Upon request, ILF 2P ... DIN SPDs type can be supplied with other voltages and currents rating.


Model ILF 2P			10 DIN	16 DIN	25 DIN
CODE			209 310	209 320	209 325
Nominal ac system Voltage		Un		230 V - 50 Hz	
Maximum Continuous Operating Voltage		Uc		275 V - 50 Hz	
Modes of protection				3	
Rated load current		lL	10 A	16 A	25 A
Test Class according to IEC 61643-11 Ed.1 (2011-03)				III	
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)				T3	
Combination wave impulse (L/N-PE)		Uoc		6 kV / 3 kA	
Voltage protection level		Up	≤ 8	00 V (L-N); ≤ 1,5 kV (L/N-P	E)
Response time (L-N)		ta		≤ 25 ns	
Response time (L/N-PE)		ta		≤ 100 ns	
End of life			OCM	I (open circuit failure mod	le)
Behaviour in case of Temporary OverVoltage (TOV):	L-N	UT	335 V / 5 s, wi	thstand (W); 440 V / 120	min, safe (S)
	N-PE	UT	120	0 V / 200 ms, withstand (\	N)
Asymmetric attenuation			range 0,4 - 2	20 MHz: ≥ 50 dB / at 4 MH	z: ≥ 80 dB
Filter components		Cx	150 nF	220 nF	220 nF
		CY	22 nF	22 nF	22 nF
		L	36 µH	19 μH	7 μΗ
Power dissipation			≤ 2,5 W	≤ 3,5 W	≤ 4 W
Max. back-up protection with fuse, if not already provided in the upstream i	installation		10 A gG	16 A gG	25 A gG
Status indicator			2 colours: transparent - OK / red - to replace		
Operating temperature range			- 40 + 55 °C		
Terminal - Conductor size			2,5 - 4 mm <sup>2</sup>	2,5 - 4 mm <sup>2</sup>	6-16 mm <sup>2</sup>
Mounting			indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715		
Enclosure material			PA6 / V-0 Polyamide according to UL 94		
Pollution Degree / Degree of Protection		PD / IP		2 / 20 (built-in)	
Approximate weight			170 g	190 g	220 g
Dimensions: Width			52.5 mm (3 modules)	52.5 mm (3 modules)	70 mm (4 modules)


Model ILF 2P with remote signal contact	10 t DIN	16 t DIN	25 t DIN		
CODE	219 310	219 320	219 325		
Remote signal contact	pote	potential-free changeover contact			
Terminal - conductor size for remote signal contact		max. 1,5 mm² flexible			
Switching capacity remote signal contact	ac: 250 V / 0,5 A - dc: 125 V / 0,2 A; 75 V / 0,5 A				




### Asymmetric attenuation characteristics



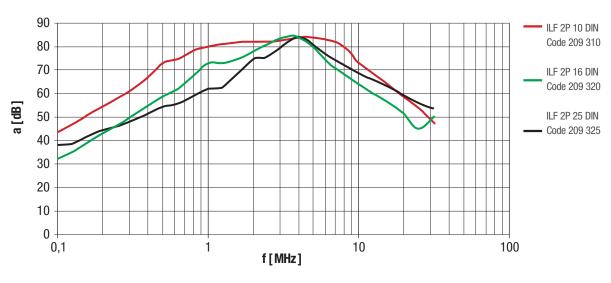

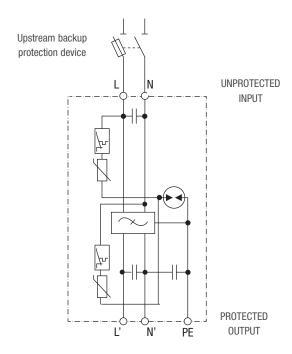

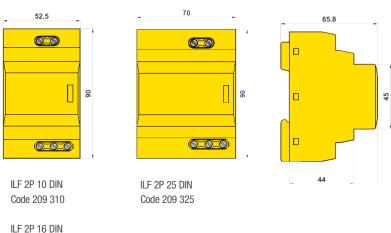



# SPDs FOR DIRECT CURRENT (DC) APPLICATIONS

SPD	Model	Application Icon	Туре	Modes of protection	Impulse discharge current l <sub>imp</sub>	Nominal discharge current l <sub>n</sub>	Page
12 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	L 7/30 DC 60 t ff		T2	1	-	20 kA	102
	L 7/30 DC 110 t ff	<b>4</b>	T2	1	-	20 kA	102
	L 7/30 DC 230 t ff	<b>\$</b>	T1 and T2	1	8 kA	30 kA	102
	L 7/30 DC 600 t ff	<b>\$</b>	T1 and T2	1	7 kA	30 kA	102
	L 7/30 DC 1000 t ff		T1 and T2	1	5 kA	20 kA	102
	L 7/30 DC 60 t ff 2	5	T2	3	-	20 kA	103
1 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	L 7/30 DC 110 t ff 2	<b>5</b>	T2	3	-	20 kA	103
1 1 1	L 7/30 DC 230 t ff 2		IT1 and T2	3	8 kA	30 kA	103
	L 7/30 DC 600 t ff 2		IT1 and T2	3	7 kA	30 kA	103
	L 7/30 DC 1000 ff 2		T1 and T2	3	5 kA	20 kA	103

# SPDs FOR PHOTOVLTAIC APPLICATIONS

SPD	Model	Application Icon	Туре	Modes of protection	Impulse discharge current l <sub>imp</sub>	Nominal discharge current l <sub>n</sub>	Page
	L 13/60 PV Y 600 t ff		T1 and T2	3	7 kA	20 kA	104
	L 13/60 PV Y 1000 t ff		T1 and T2	3	5 kA	20 kA	104
0 1 1 1 10 2 2 2	L 3/40 PV Y 600 t ff	7	T2	3	-	20 kA	105
1 111	L 3/40 PV Y 1000 t ff	<b>7</b>	T2	3	-	20 kA	105






























L 7/30 DC ... ff is a voltage limiting SPD providing a single mode of protection, typically installed in DC Distribution Boards (DB) with the following features and benefits:

- T1 and T2 SPD (Type 1 and Type 2) for 230, 600 and 1000 V DC according to IEC 61643-41Ed.1 and EN IEC 61643-41 (2025);
- T2 SPD (Type 2) for 60 and 110 V DC according to IEC 61643-41Ed. 1 and EN IEC 61643-41 (2025);
- Backup protection is not required up to a prospective DC short circuit current of 1000 A (for U<sub>N</sub> up to 230 V);
- · Three colour Status Indicator with progressive indication of remaining performance;
- Pollution Degree 3 up to Un 230 V DC.

Model L 7/30 DC			60 ff	110 ff	230 ff	600 ff	1000 ff
CODE			200 602	200 603	200 600	200 606	200 610
Nominal dc system voltage		Un	60 V DC	110 V DC	230 V DC	600 V DC	1000 V DC
Modes of protection					1		
Max Continuous Operating Voltage		Uc	100 V DC	200 V DC	420 V DC	895 V DC	1000 V DC
Type according to IEC 61643-41 Ed.1 (2025) and EN IEC 61643-41	(2025)		T2	T2	T1 and T2	T1 and T2	T1 and T2
Impulse discharge current (10/350 µs)		limp	-	-	8 kA	7 kA	5 kA
Charge		Q	-	-	4 As	3,6 As	2,9 As
Nominal discharge current (8/20 µs)		ln	20 kA	20 kA	30 kA	30 kA	20 kA
Max. discharge current (8/20 µs)		Imax	30 kA	30 kA	40 kA	40 kA	40 kA
Voltage protection level at a discharge current of:	1 kA	Up	≤ 0,22 kV	≤ 0,42 kV	≤ 0,81 kV	≤ 1,20 kV	≤ 1,85 kV
	5 kA	Up	≤ 0,28 kV	≤ 0,50 kV	≤ 1,00 kV	≤ 1,46 kV	≤ 2,25 kV
	10 kA	Up	≤ 0,36 kV	≤ 0,60 kV	≤ 1,20 kV	≤ 1,58 kV	≤ 2,60 kV
	20 kA	Up	≤ 0,50 kV	≤ 0,80 kV	≤ 1,35 kV	≤ 1,95 kV	≤ 2,85 kV
	30 kA	Up	-	-	≤ 1,50 kV	≤ 2,15 kV	-
Response time		ta	≤ 25 ns				
End of Life			OCM (Open Circuit Failure Mode)				
Short Circuit Current rating without backup protection (internal discon-	nector)	Isccr	1000 A	1000 A	1000 A	500 A	200 A
Short Circuit Current rating with max. backup protection fuse		Isccr	30 kA	30 kA	30 kA	30 kA	30 kA
Max. back-up protection with fuse (DC)			200 A gPV	200 A gPV	200 A gPV	200 A gPV	200 A gPV
Follow current interrupt rating		lfi	NFC No Follow Current®				
Status indicator (indication of disconnector operation)			3 colours with progressive performance indication				
Operating temperature range / Humidity			-40 +80 °C (extended) / 5% 95%				
Terminal - Conductor size				4-35 mm <sup>2</sup> 1	flexible / 4-50 mm	n² semi rigid	
Busbar connections				fork	k-type busbar 16 r	mm²	
Mounting				indoor, 35 x 7,5	mm top hat DIN ra	ail IEC/EN 60715	
Case material / Flammability grade				BMC / V-	0 in accordance w	vith UL 94	
Pollution degree / Degree of protection		PD	3	3	3	2	2
Degree of protection		IP			20 (built-in)		
Approximate weight			120 g	150 g	170 g	175 g	190 g
Dimensions: width				1	7,5 mm (1 module	e)	
3rd party testing					CTI test report		
Model L 7/30 DC with remote signal contact			60 t ff	110 t ff	230 t ff	600 t ff	1000 t ff

210 602

210 600

potential-free changeover contact

max. 1,5 mm<sup>2</sup> flexible

ac: 250 V / 0,5 A - dc: 125 V / 0,2 A; 75 V / 0,5 A

210 603

210 606

210 610

CODE

Remote signal contact

Terminal - conductor size for remote signal contact

Switching capacity remote signal contact




























L 7/30 DC ... ff is a voltage limiting SPD providing three modes of protection, typically installed in DC Distribution Boards (DB) with the following features and benefits:

- T1 and T2 SPD (Type 1 and Type 2) for 230, 600 and 1000 V DC according to IEC 61643-41Ed.1 and EN IEC 61643-41 (2025);
- T2 SPD (Type 2) for 60 and 110 V DC according to IEC 61643-41Ed.1 and EN IEC 61643-41 (2025);
- Backup protection is not required up to a prospective DC short circuit current of 1000 A (for U<sub>N</sub> up to 230 V);
- Three colour Status Indicator with progressive indication of remaining performance;
- Pollution Degree 3 up to Un 230 V DC.

Model L 7/30 DC ... with remote signal contact

Terminal - conductor size for remote signal contact

Switching capacity remote signal contact

CODE

Remote signal contact

Model L 7/30 DC			60 ff 2	110 ff 2	230 ff 2	600 ff 2	1000 ff 2	
CODE			200 622	200 623	200 620	200 626	200 612	
Nominal dc system voltage		Un	60 V dc	110 V dc	230 V dc	600 V dc	1000 V dc	
Modes of protection					3			
Max Continuous Operating Voltage		Uc	100 V dc	200 V dc	420 V dc	895 V dc	1000 V dc	
Type according to IEC 61643-41 Ed.1 (2025) and EN IEC 616	643-41 (2025)		T2	T2	T1 and T2	T1 and T2	T1 and T2	
Impulse discharge current (10/350 μs)		limp	-	-	8 kA	7 kA	5 kA	
Charge		Q	-	-	3,5 As	3,5 As	2,5 As	
Nominal discharge current (8/20 µs)		In	20 kA	20 kA	30 kA	30 kA	20 kA	
Max. discharge current (8/20 μs)		Imax	30 kA	30 kA	40 kA	40 kA	40 kA	
Voltage protection level at a discharge current of:	1 kA	Up	≤ 0,22 kV	≤ 0,42 kV	≤ 0,81 kV	≤ 1,20 kV	≤ 1,85 kV	
	5 kA	Up	≤ 0,28 kV	≤ 0,50 kV	≤ 1,00 kV	≤ 1,46 kV	≤ 2,25 kV	
	10 kA	Up	≤ 0,36 kV	≤ 0,60 kV	≤ 1,20 kV	≤ 1,58 kV	≤ 2,60 kV	
	20 kA	Up	≤ 0,50 kV	≤ 0,80 kV	≤ 1,35 kV	≤ 1,95 kV	≤ 2,85 kV	
	30 kA	Up	-	-	≤ 1,50 kV	≤ 2,15 kV	-	
Response time		ta			≤ 25 ns			
End of Life			OCM (Open Circuit Failure Mode)					
Short Circuit Current rating without backup protection (internal	disconnector)	Isccr	1000 A	1000 A	1000 A	500 A	200 A	
Short Circuit Current rating with max. backup protection fus	е	Isccr	30 kA	30 kA	30 kA	30 kA	30 kA	
Max. back-up protection with fuse (DC)			100 A gPV	100 A gPV	100 A gPV	100 A gPV	100 A gPV	
Follow current interrupt rating		lfi	NFC No Follow Current®					
Status indicator (indication of disconnector operation)			3 colours with progressive performance indication					
Operating temperature range / Humidity				-40 +8	0 °C (extended) /	5% 95%		
Terminal - Conductor size				4-35 mm² flexible / 4-50 mm² semi rigid				
Busbar connections			fork-type busbar 16 mm <sup>2</sup>					
Mounting				indoor, 35 x 7,5	mm top hat DIN ra	ail IEC/EN 60715		
Case material / Flammability grade				BMC / V-	0 in accordance w	vith UL 94		
Pollution degree / Degree of protection		PD	3	3	3	2	2	
Degree of protection		IP			20 (built-in)			
Approximate weight			270 g	310 g	330 g	390 g	410 g	
Dimensions: width				;	35 mm (2 modules	s)		
3rd party testing					CTI test report			

60 tff 2

210 622

110 t ff 2

230 t ff 2

210 623 210 620 210 626

potential-free changeover contact

max. 1,5 mm<sup>2</sup> flexible

ac: 250 V / 0,5 A - dc: 125 V / 0,2 A; 75 V / 0,5 A

600 t ff 2

1000 tff 2

210 612



























L 13/60 PV Y ... ff is a voltage limiting SPD for photovoltaic systems providing three modes of protection, typically installed close to the PV inverter, close to the PV generator and/or in the junction box, with the following features and benefits:

- Impulse test classification: Test Class I and II according to IEC 61643-31 Ed.1 (2018) and Type 2 according to EN 61643-31 (2019);
- High short circuit current rating without backup protection Iscpv = 1000 A according to IEC 61643-31;
- High short circuit current rating without backup protection, additionally tested based on IEC/EN 61643-11;
- Three colour Status Indicator with progressive indication of remaining performance;
- Upon request the L 13/60 PV Y ... ff type SPD can be supplied with other ratings for discharge current and Max. Continous Operating Voltage.

Model L 13/60 PV Y			600 ff	1000 ff	
CODE			216 106	216 110	
Maximum Continous Operating DC Voltage for PV applications		UCPV	600 V DC	1000 V DC	
Modes of protection			3		
Type (acc. to IEC 61643-31 Ed.1 (2018) and EN 61643-31 (2019))			T1+	T2	
Impulse discharge current (10/350 µs) (all modes)		limp	7 kA	5 kA	
Nominal discharge current (8/20 µs) (all modes)		In	20,0	kA	
Total discharge current (10/350 µs) DC+ and DC- to PE		Total 10/350	13 kA	10 kA	
Total discharge current (8/20 µs) DC+ and DC- to PE		Total 8/20	35,0 kA	40,0 kA	
Max. discharge current (8/20 µs)		Imax	70,0	kA	
Voltage protection level at a discharge current of (all modes)	1 kA	Up	≤ 1,60 kV	≤ 2,60 kV	
	5 kA	Up	≤ 1,90 kV	≤ 3,10 kV	
	10 kA	Up	≤ 2,10 kV	≤ 3,30 kV	
	15 kA	Up	≤ 2,40 kV	≤ 4,00 kV	
	20 kA	Up	≤ 2,50 kV	≤ 4,20 kV	
Response time		ta	≤ 25	ns	
End of life			OCM (open circuit failure mode)		
Short-circuit current rating (acc. to IEC 61643-31)		ISCPV	1000	) A	
Short-circuit current rating (based on IEC/EN 61643-11)		ISCCR	500 A	200 A	
Follow current interrupt rating			NFC No Follo	w Current®	
Status indicator			3 colours with progressive	performance indication	
Operating temperature range / Humidity			-40 +80 °C (extended) / 5% 95%		
Terminal-Conductor size			4-35 mm² flexible / 4	· ·	
Mounting			indoor, 35 x 7,5 mm top ha		
Case material / Flammability grade			BMC / V-0 accor	ŭ .	
Pollution degree / Degree of protection		PD / IP	2 / 20 (b		
Approximate weight			590 g	690 g	
Dimensions: width			53 mm (3 modules)	70 mm (4 modules)	

Model L 13/60 PV	Υ	<ul> <li>with remote</li> </ul>	signal	contact

Model L 13/60 PV Y with remote signal contact	600 t ff	1000 t ff		
CODE	216 116	216 126		
Remote signal contact	potential-free changeover contact			
Terminal - conductor size for remote signal contact	max. 1,5 n	nm² flexible		
Switching capacity remote signal contact	ac: 250 V / 0.5 A – dc: 1	ac: 250 V / 0.5 A – dc: 125 V / 0.2 A: 75 V / 0.5 A		






















L 3/40 PV Y ... ff is a voltage limiting SPD for photovoltaic systems providing three modes of protection, typically installed close to the PV inverter, close to the PV generator and/or in the junction box, with the following features and benefits:

- Impulse test classification: Test Class II according to IEC 61643-31 Ed.1 (2018) and Type 2 according to EN 61643-31 (2019);
- High short circuit current rating without backup protection Iscpv = 1000 A according to IEC 61643-31;
- High short circuit current rating without backup protection, additionally tested based on IEC/EN 61643-11;
- Three colour Status Indicator with progressive indication of remaining performance;
- Upon request the L 13/60 PV Y ... ff type SPD can be supplied with other ratings for discharge current and Max. Continous Operating Voltage.

Model L 3/40 PV Y			600 ff	1000 ff	
CODE			210 106	210 110	
Maximum Continous Operating DC Voltage for PV applications		UCPV	600 V DC	1000 V DC	
Modes of protection			3		
Type (acc. to IEC 61643-31 Ed.1 (2018) and EN 61643-31 (2019))			T2		
Nominal discharge current (8/20 µs) (all modes)		In	20,0	kA	
Total discharge current (8/20 µs) DC+ and DC- to PE		Total 8/20	30,0	kA	
Max. discharge current (8/20 µs)		Imax	40,0	kA	
Voltage protection level at a discharge current of (all modes)	1 kA	Up	≤ 1,70 kV	≤ 2,70 kV	
	5 kA	Up	≤ 2,10 kV	≤ 3,20 kV	
	10 kA	Up	≤ 2,50 kV	≤ 3,40 kV	
	15 kA	Up	≤ 2,70 kV	≤ 4,10 kV	
	20 kA	Up	≤ 2,80 kV	≤ 4,30 kV	
Response time		ta	≤ 25 ns		
End of life			OCM (open circu	it failure mode)	
Short-circuit current rating (acc. to IEC 61643-31)		ISCPV	1000 A		
Short-circuit current rating (based on IEC/EN 61643-11)		ISCCR	500 A	200 A	
Follow current interrupt rating			NFC No Follow Current®		
Status indicator			3 colours with progressive performance indication		
Operating temperature range / Humidity			-40 +80 °C (exte	nded) / 5% 95%	
Terminal-Conductor size			4-35 mm² flexible / 4-50 mm² semi rigid		
Mounting			indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715		
Case material / Flammability grade			BMC / V-0 according to UL 94		
Pollution degree / Degree of protection PD / IP			2 / 20 (built-in)		
Approximate weight			470 g	520 g	
Dimensions: width			53 mm (3	modules)	

Model I	3/40 PV Y	. with remo	te sinnal	contact
IVIUUUTII	3)/4U/FV/F	. VVIIII I I I IIII	חבי פונוויםו	CUIIIAG

Model L 3/40 PV Y with remote signal contact	600 t ff	1000 t ff		
CODE	210 116	210 126		
Remote signal contact	potential-f	ree changeover contact		
Terminal - conductor size for remote signal contact	max	. 1,5 mm² flexible		
Switching capacity remote signal contact	ac: 250 V / 0,5 A -	ac: 250 V / 0,5 A - dc: 125 V / 0,2 A; 75 V / 0,5 A		




### SPDs FOR LED LIGHTING



## ZOTUP SPDs FOR LED LIGHTING IN LOW VOLTAGE SYSTEMS

SPD	Model	Application icon	Туре	Modes of protection	Impulse discharge current l <sub>imp</sub>	Nominal discharge current l <sub>n</sub>	Page
	LLP 7/30 230 ff 1+1		T1 and T2	3	8 kA	30 kA	108
Î	LLP 2/10 230 ff 1+1	<b>5</b>	T2	3	-	10 kA	109

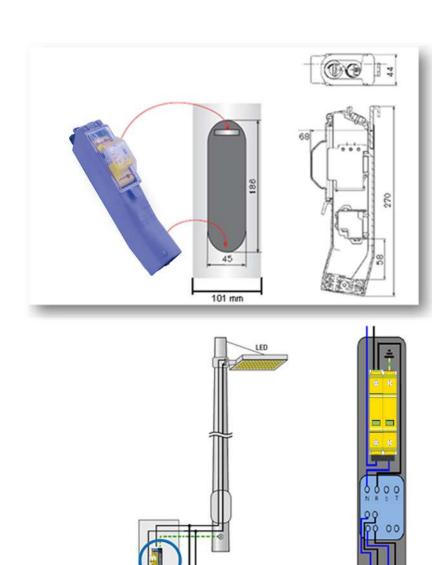

SPD inside the connection box of the lightning pole

TECHNICAL DATA


























LLP (LED Lighting Protection) systems is a ready to install assembly of a voltage limiting and a voltage switching SPD providing three modes of protection in a protective housing for mounting inside the opening at the pole base, with the following features and benefits:

- Combination SPD for the protection of street lighting luminaires against direct and indirect lightning effects;
- Backup protection is not required with an upstream CB ≤ 160 A or up to an lsccr ≤ 5 kA rms;
- Easy wiring inside of the openings at the pole base with a size of 186 x 45 mm (minimum diameter of the pole 101 mm);
- The special SPD case material allows to match with "Pollution Degree 3" requirements.

ODE  Ominal AC system voltage Ordes of protection ax Continuous Operating Voltage set Class according to IEC 61643-11 Ed.1 (2011-03) Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025) Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025) Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025) Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025) Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025) Type according to IEC 61643-11 Ed.1 (2011-03) Type according to IEC 61643-11 (2011-03) Type according to IEC 61643	242 191 230/400 V AC 3 335 V AC I and II T1 and T2 8 kA 52 kA 3,6 As 26 As 30 kA 52 kA 40 kA 70 kA		
odes of protection ax Continuous Operating Voltage ust Class according to IEC 61643-11 Ed.1 (2011-03) pe according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025) pulse discharge current (10/350 µs) (L-N) pulse discharge current (10/350 µs) (N-PE) parage (L-N) pulse discharge current (10/350 µs) (N-PE) parage (L-N) parage (N-PE) pulse discharge current (8/20 µs) (N-PE) parage (N-PE) pulse discharge current (8/20 µs) (N-PE) parage (N-PE) pulse discharge current (8/20 µs) (L-N) pulse discharge current (8/20 µs) (N-PE) parage (N-PE) pulse discharge current (8/20 µs) (N-PE) pulse discharge current (8/	3 335 V AC I and II T1 and T2 8 kA 52 kA 3,6 As 26 As 30 kA 52 kA 40 kA 70 kA ≤ 0,83 kV		
ax Continuous Operating Voltage set Class according to IEC 61643-11 Ed.1 (2011-03) spe according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025) spulse discharge current (10/350 μs) (L-N) spulse discharge current (10/350 μs) (N-PE) sharge (L-N) sharge (N-PE) spulse discharge current (8/20 μs) (N-PE) sharge (N-PE) spulse discharge current (10/350 μs) (N-PE) sharge (N-PE) spulse discharge current (10/350 μs) (N-PE) sharge (N-PE) spulse discharge current (8/20 μs) (N-PE) spulse disc	335 V AC I and II T1 and T2 8 kA 52 kA 3,6 As 26 As 30 kA 52 kA 40 kA 70 kA ≤ 0,83 kV		
set Class according to IEC 61643-11 Ed.1 (2011-03)  spe according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)  spulse discharge current (10/350 µs) (L-N)  spulse discharge current (10/350 µs) (N-PE)  spulse discharge current (8/20 µs) (L-N)  spulse discharge current (8/20 µs) (L-N)  spulse discharge current (8/20 µs) (N-PE)  spulse discharge current	I and II T1 and T2 8 kA 52 kA 3,6 As 26 As 30 kA 52 kA 40 kA 70 kA ≤ 0,83 kV		
pe according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)  upulse discharge current (10/350 μs) (L-N)  upulse discharge current (10/350 μs) (N-PE)  limp  upulse discharge current (10/350 μs) (N-PE)  unarge (N-PE)  unarge (N-PE)  unarge (N-PE)  unarge (N-PE)  unarge (N-PE)  unarge (N-PE)  ln  unarge (N-PE)  unarge (N-PE)  ln  unax  unarge (N-PE)  unarge (N-PE)  unarge (N-PE)  ln  unarge (N-PE)  unarge (N-PE)  unarge (N-PE)  ln  unarge (N-PE)	T1 and T2 8 kA 52 kA 3,6 As 26 As 30 kA 52 kA 40 kA 70 kA		
Imp pupulse discharge current (10/350 μs) (L-N)	8 kA 52 kA 3,6 As 26 As 30 kA 52 kA 40 kA 70 kA ≤ 0,83 kV		
Imp	52 kA 3,6 As 26 As 30 kA 52 kA 40 kA 70 kA ≤ 0,83 kV		
Imp	3,6 As 26 As 30 kA 52 kA 40 kA 70 kA ≤ 0,83 kV		
narge (N-PE)  Q  prininal discharge current (8/20 μs) (L-N)  prininal discharge current (8/20 μs) (N-PE)  ax. discharge current (8/20 μs) (L-N)  ax. discharge current (8/20 μs) (N-PE)  Imax  limax  loltage protection level (L-N, L-PE) at a discharge current of  1 kA  Up  5 kA  Up  20 kA  Up  25 kA  Up  30 kA  Up	26 As 30 kA 52 kA 40 kA 70 kA ≤ 0,83 kV		
ominal discharge current (8/20 µs) (L-N) In ominal discharge current (8/20 µs) (N-PE) In ax. discharge current (8/20 µs) (L-N) Imax ax. discharge current (8/20 µs) (N-PE) Imax  oltage protection level (L-N, L-PE) at a discharge current of I kA Up 5 kA Up 20 kA Up 25 kA Up 30 kA Up	30 kA 52 kA 40 kA 70 kA ≤ 0,83 kV		
ominal discharge current (8/20 µs) (L-N) In ominal discharge current (8/20 µs) (N-PE) In ax. discharge current (8/20 µs) (L-N) Imax ax. discharge current (8/20 µs) (N-PE) Imax  oltage protection level (L-N, L-PE) at a discharge current of I kA Up 5 kA Up 20 kA Up 25 kA Up 30 kA Up	52 kA 40 kA 70 kA ≤ 0,83 kV		
In   Imax   I	40 kA 70 kA ≤ 0,83 kV		
ax. discharge current (8/20 μs) (L-N)       Imax         ax. discharge current (8/20 μs) (N-PE)       Imax         oltage protection level (L-N, L-PE) at a discharge current of       1 kA       Up         5 kA       Up         20 kA       Up         25 kA       Up         30 kA       Up	40 kA 70 kA ≤ 0,83 kV		
Imax	≤ 0,83 kV		
Oltage protection level (L-N, L-PE) at a discharge current of 1 kA Up 5 kA Up 20 kA Up 25 kA Up 30 kA Up	≤ 0,83 kV		
5 kA Up 20 kA Up 25 kA Up 30 kA Up	<i>'</i>	≤ 1,50 kV	
20 kA U <sub>P</sub> 25 kA U <sub>P</sub> 30 kA U <sub>P</sub>	≤ 1,00 kV	≤ 1,50 kV	
25 kA Up 30 kA Up	≤ 1,35 kV	≤ 1,50 kV	
30 kA Up	≤ 1,45 kV	≤ 1,50 kV ≤ 1,50 kV	
	≤ 1,40 KV ≤ 1.60 kV	≤ 1,60 kV	
oltage protection level (N-PE) Up Up	≤ 1,00 kV	≥ 1,00 KV	
esponse time (L-N / N-PE)	≤ 1,30 kV ≤ 25 ns / ≤ 100 ns		
nd of life	OCM (open circuit failure mode)		
id of file shaviour in case of Temporary OverVoltage (TOV): L-N Uт	440 V / 120 min, withstand (W)		
N-PE UT	1200 V / 200 ms, with	` '	
nort Circuit Current rating without backup protection (internal disconnector)	5 kA rms	istariu (vv)	
nort Circuit Current rating with max. backup protection fuse (L)	100 kA rms		
ax. back-up protection with up-stream CB with a max. let-through energy of	160 A (max. 4,50 x		
nax, prospective short circuit current depends on the CB breaking capability).	100 A (IIIax. 4,50 X	10 11 3)	
ax. back-up protection with FUSE at prospective short circuit currents of	125 A gG (5 ÷ 100 l	k/\rme\	
ax. back-up protection with 103E at prospective short circuit currents of	NFC No Follow Cu		
atus indicator (indication of disconnector operation)	3 colours with progressive perf		
perating temperature range / Humidity	-40 +80 °C (extended)		
rminal-Conductor size	4-35 mm <sup>2</sup> flexible / 4-50 n	,	
ounting	35 x 7,5 mm top hat DIN rai	•	
ase material / Flammability grade	BMC / V-0 in accordance		
ollution degree / Degree of protection PD / IP	3 / 54 (built-in		
proximate weight	300 q	")	
mensions	I 68 x h 270 x d 4	4 mm	
ertifications / Quality Mark	CB, STC issued by OVE /		

























LLP (LED Lighting Protection) systems is a ready to install assembly of a voltage limiting and a voltage switching SPD providing three modes of protection in a protective housing, with the following features and benefits:

- T2 SPD (Type 2) according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025);
- Combination SPD for the protection of street lighting luminaires against indirect lightning effects;
- Backup protection is not required with an upstream CB ≤ 160 A or up to an Isccr ≤ 5 kA rms;
- Easy wiring inside of the openings at the pole base with a size of 186 x 45 mm (minimum diameter of the pole 101 mm);
- The special SPD case material allows to match with "Pollution Degree 3" requirements.

Model LLP 2/10			230 ff <sup>-</sup>	1+1
CODE			242 1	90
Nominal AC system voltage			230/400 V AC	
Modes of protection			3	
Max Continuous Operating Voltage (L-N)		Uc	335 V A	AC
Max Continuous Operating Voltage (N-PE)		Uc	255 V /	OA OA
Test Class according to IEC 61643-11 Ed.1 (2011-03)		00	1	10
Type according to IEC 61643-11 Ed.2 (2025) and EN IEC 61643-11 (2025)			T2	
Nominal discharge current (8/20 µs) (L-N)		In	10 k/	4
Nominal discharge current (8/20 µs) (N-PE)		In	40 kA	
Max. discharge current (8/20 μs) (L-N)		Imax	20 k/	
Max. discharge current (8/20 µs) (N-PE)		Imax	65 kA	
max. alcordings outroits (o/20 po) (it i 2)		IIIICA	00 10	,
Voltage protection level (L-N, L-PE) at a discharge current of	1 kA	Up	≤ 0,87 kV	≤ 1,50 kV
g- p (=, = <i>)</i> a ag	5 kA	Up	≤ 1,00 kV	≤ 1,50 kV
	10 kA	Up	≤ 1,25 kV	≤ 1,50 kV
Voltage protection level (N-PE)	10101	Up	≤ 1.50	· · · · · · · · · · · · · · · · · · ·
Response time (L-N / N-PE)		ta	< 25 ns / <	
End of life			OCM (open circuit failure mode)	
Behaviour in case of Temporary OverVoltage (TOV):	L-N	UT	440 V / 120 min, v	
g- ()	N-PE	Uτ	1200 V / 200 ms,	` '
Short Circuit Current rating without backup protection (internal disconnector)		Isccr	5 kA rr	1 /
Short Circuit Current rating with max. backup protection fuse (L)		Isccr	100 kA i	•
Max. back-up protection with up-stream CB with a max. let-through energy of		10001	160 A (max. 4,5	
(max. prospective short circuit current depends on the CB breaking capability).				
Max. back-up protection with FUSE at prospective short circuit currents of			125 A qG (> 5 ÷	100 kΔ rms)
Follow current interrupt rating (L-N)		lfi	NFC No Follow	,
Follow current interrupt rating (N-PE)		lfi	100 A r	
Status indicator (indication of disconnector operation)		111	3 coloured levels with progress	
Operating temperature range / Humidity			-40 +80 °C (extend	
Terminal-Conductor size			4-35 mm <sup>2</sup> flexible / 4-	,
Mounting			35 x 7,5 mm top hat DIN	0
Case material / Flammability grade			BMC / V-0 in accorda	
Pollution degree / Degree of protection		PD / IP	3 / 54 (bu	
Approximate weight			260 (	
Dimensions			I 68 x h 270 x	,
Certifications / Quality Mark			CB, STC issued by OV	/E / KEMA-KEUR







# ZOTUP SPDs FOR SIGNALLING AND TELECOMMUNICATION

### SPDs FOR SIGNALLING AND TELECOMMUNICATION APPLICATIONS

Typical installation: in series with the signalling/telecommunication circuits for equipments with "low resistability" according Recommendation ITU-T K.45 / "low surge immunity" according IEC/EN 61000-4-5.

#### Features:

- SPDs with impulse ratings for categories C1, C2, C3 and D1 (according to IEC/EN 61643-21).
- SPDs with common mode and differential mode protection against symmetrical and/or asymmetrical disturbances.
- SPDs with disconnecting means in case of accidential contact between the signal/telecommunication circuit and a power line (e.g. 230/400V a.c.) due to insulation faults.
- SPDs with integrated earth/protective ground connection via the 35 x 7,5 mm top hat DIN rail according IEC/EN 60715 and by screwless spring type termination of the cable screen.
- SPDs with RJ and LSA connectors.



#### SPDs FOR SIGNALLING

SPD	Model	Application lcon	Impulse rating / Category	Category D1 Impulse discharge current (10/350 µs) per wire	Category C2 Nominal discharge current (8/20 µs) per wire	Page
	S-AS 2 24/1		C2, C3	-	1 kA	115
	S-AS 2 48/1		C2,C3	-	1 kA	115
	S-ASI 1 L 6		C1, C2, C3, D1	2,5 kA	15 kA	116
	S-ASI 1 L 12		C1, C2, C3, D1	2,5 kA	15 kA	116
	S-ASI 1 L 24		C1, C2, C3, D1	2,5 kA	15 kA	116
	S-ASI 1 L 48		C1, C2, C3, D1	2,5 kA	15 kA	116
	S-ASI 2 L 6		C1, C2, C3, D1	2,5 kA	15 kA	117
Marie Control	S-ASI 2 L 12		C1, C2, C3, D1	2,5 kA	15 kA	117
	S-ASI 2 L 24		C1, C2, C3, D1	2,5 kA	15 kA	117
Marie Control of the	S-ASI 2 L 48		C1, C2, C3, D1	2,5 kA	15 kA	117
	S-ASI 1 R 6		C1, C2, C3, D1	2,5 kA	15 kA	118
	S-ASI 1 R 12		C1, C2, C3, D1	2,5 kA	15 kA	118
	S-ASI 1 R 24		C1, C2, C3, D1	2,5 kA	15 kA	118
	S-ASI 1 R 48		C1, C2, C3, D1	2,5 kA	15 kA	118
	S-ASI 2 R 6		C1, C2, C3, D1	2,5 kA	15 kA	119
	S-ASI 2 R 12		C1, C2, C3, D1	2,5 kA	15 kA	119
	S-ASI 2 R 24		C1, C2, C3, D1	2,5 kA	15 kA	119
	S-ASI 2 R 48		C1, C2, C3, D1	2,5 kA	15 kA	119




SPD	Model	Application Icon	Impulse rating / Category	Transmission category	Category D1 Impulse di- scharge current (10/350 µs) per wire	Category C2 Nominal discharge current (8/20 µs) per wire	Page
E COL	S-ASI 1 G 48	<b>\$</b>	C1, C2, C3, D1	-	2,5 kA	15 kA	120
を を は は は に に に に に に に に に に に に に	S-ASI 1 G 110	<b>\$</b>	C1, C2, C3, D1	-	2,5 kA	15 kA	120
	S-ASI 2 G 48	<b>\$</b>	C1, C2, C3, D1	-	2,5 kA	15 kA	121
Party Control of the	S-ASI 2 G 110	<b>\$</b>	C1, C2, C3, D1	-	2,5 kA	15 kA	121




# Surge Protective Devices: ZOTUPSIGNAL







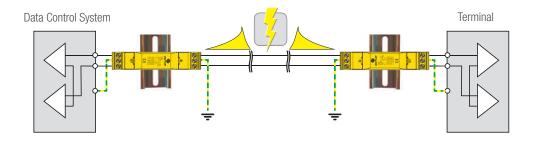

S-AS 2 is an SPD for installation in series with the telecommunication/signalling circuits to protect sensitive equipment with low resistability/immunity, providing the following features and benefits:

- Offers sensitive common and differential mode protection to connected devices;
- Very efficient protection providing a low voltage protection level Up;
- · Providing protection against indirect lightning effects;
- Suitable for installation at LPZ boundaries up to 0<sub>B</sub> -2 in accordance with the lightning protection zones concept;
- The end of the life behaviour of the SPD is Short Circuit Mode (SCM);
- Earth/ground connection is made via screw type terminals.


Note: Equipment protection at both ends of the telecommunication/signal line is essential for an efficient protection system (see above schematics).


Modello S-AS 2		24/1	48/1			
CODE		302 524	302 548			
SPD impulse rating/Category		C2, C3				
Number of protected Lines		1				
Nominal voltage	Un	24 V dc/18 V ac	48 V dc/34 V ac			
Maximum Continuous Operating Voltage	Uc	29 V dc	58 V dc			
Rated Current	lL	5 A	5 A			
Category C2 - Total Discharge Current (8/20 µs)	Total 8/20	2 kA	2 kA			
Category C2 - Nominal Discharge Current (8/20 µs) per wire	ln	1 kA	1 kA			
Category C2 - Voltage Protection level at In (all modes)	Up	≤ 90 V ≤ 170 V				
Category C3 - Voltage Protection level at 1 kV/µs wire (all modes)	Up	≤ 51 V	≤ 118 V			
Response time	ta	≤ 25	5 ns			
Parasitic Capacitance	С	10	nF			
Operating temperature range		- 40	+ 80 °C			
Terminal - conductor size		max. 2,5 m	m² flexible			
Mounting		indoor, 35 x 7,5 mm top h	at DIN rail IEC/EN 60715			
Housing		thermo	plastic			
Degree of protection	IP	20				
Approximate weight		45 g				
Dimension: width		17,5 mm (1 module)				












S-ASI ... L ...

DIN-rail socket + pluggable SPD-module

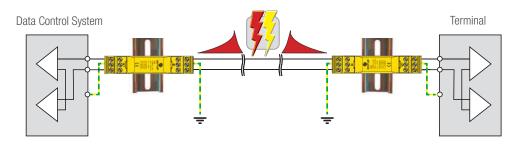

S-ASI ... L ... is an SPD for installations in series with the telecommunication/signalling circuits to protect sensitive equipment with low resistability/immunity, providing the following features and benefits:


- Classification for impulse test: categories C1, C2, C3, D1 (in accordance with IEC/EN 61643-21);
- S-ASI ... SPDs represent a pluggable execution and they provide continuity of the signal circuits. They do not interrupt when the plug in module is pulled out;
- Offers sensitive common and differential mode protection to connected devices;
- · Providing protection against direct and indirect lightning effects;
- The end of the life behaviour of the SPD is Short Circuit Mode (SCM);
- The connection is made by screw type terminals providing best connection reliability;
- With integrated earth/protective ground connection via the top hat DIN rail and by screw type terminations PE and G.

				4-20 mA	Konnex
Model S-ASI 1 L		6	12	24	48
CODE		341 006	341 012	341 024	341 048
Number of protected Lines			•	1	7
SPD impulse rating/Category			C1, C2,	C3, D1	
Nominal Voltage	Un	6 V dc/ 4,2 V ac	12 V dc/9 V ac	24 V dc/18 V ac	48 V dc/39 V ac
Maximum Continuous Operating Voltage	Uc	7,2 V dc	14,4 V dc	28,8 V dc	57,6 V dc
Rated Current	lL		1,	5 A	
Category C1 - Nominal discharge current (8/20 µs) per wire	In		1	kA	
Category C1 - Voltage protection level at In (all modes)	Up	30 V dc	50 V dc	65 V dc	80 V dc
Category C2 - Nominal discharge current (8/20 µs) per wire	In	15 kA			
Category C2 - Voltage protection level at In (all modes)	In	40 V dc	55 V dc	70 V dc	120 V dc
Category C3 - Voltage protection level at 1 kV/µs (all modes)	Up	≤ 15 V	≤ 28 V	≤ 64 V	≤ 85 V
Category D1 - impulse discharge current (10/350 µs) per wire	limp 10/350		2,5	i kA	
Category D1 - Total discharge current (10/350 µs)	Total 10/350		5	kA	
Response time	ta		≤ 1	Ins	
Longitudinal impedance/resistance			2,2	μΗ	
Parasitic capacitance	С		1,5	i nF	
Operating temperature range			-25	+70 °C	
Terminal - conductor size			max. 1,5 n	nm² flexible	
Mounting		ind	oor, 35 x 7,5 mm top I	hat DIN rail IEC/EN 60	715
Housing			thermo	plastic	
Degree of protection	IP		_	.0	
Approximate weight				) g	
Dimension: width			17,5 mm	(1 module)	



# Surge Protective Devices: ZOTUPSIGNAL

#### MODEL S-ASI 1 L ...




Typical protection scheme for applications using 6, 12, 24 or 48 V DC-, 4-20 mA or Konnex .

For applications where a high discharge capability and a significant rated load current are required.

# S-ASI ... L ...

#### MODEL S-ASI 2 L ...





				4-20 mA	Konnex	
Model S-ASI 2 L		6	12	24	48	
CODE		341 206	341 212	341 224	341 248	
Number of protected Lines				2		
SPD impulse rating/Category		C1, C2, C3, D1				
Nominal Voltage	Un	6 V dc/ 4,2 V ac	12 V dc/9 V ac	24 V dc/18 V ac	48 V dc/39 V ac	
Maximum Continuous Operating Voltage	Uc	7,2 V dc	14,4 V dc	28,8 V dc	57,6 V dc	
Rated Current	IL		1,	5 A		
Category C1 - Nominal discharge current (8/20 µs) per wire	In		1	kA		
Category C1 - Voltage protection level at In (all modes)	Up	30 V dc	50 V dc	65 V dc	80 V dc	
Category C2 - Nominal discharge current (8/20 µs) per wire	ln	15 kA				
Category C2 - Voltage protection level at In (all modes)	ln	40 V dc	55 V dc	70 V dc	120 V dc	
Category C3 - Voltage protection level at 1 kV/µs (all modes)	Up	≤ 15 V	≤ 28 V	≤ 64 V	≤ 85 V	
Category D1 - impulse discharge current (10/350 $\mu$ s) per wire	limp 10/350	2,5 kA				
Category D1 - Total discharge current (10/350 µs) per line	Total 10/350		5	kA		
Response time	ta		≤ ′	1ns		
Longitudinal impedance/resistance			2,2	2 μΗ		
Parasitic capacitance	С		1,5	5 nF		
Operating temperature range			-25	+70 °C		
Terminal - conductor size			max. 1,5 r	nm² flexible		
Mounting		indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715				
Housing				oplastic		
Degree of protection	IP		_	20		
Approximate weight				0 g		
Dimension: width			17,5 mm	(1 module)		












S-ASI ... R ...

DIN-rail socket + pluggable SPD-module

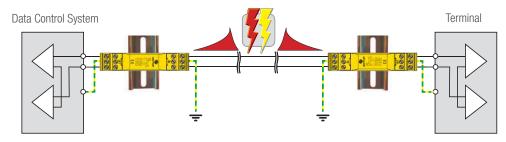

S-ASI ... R ... is an SPD for installation in series with the telecommunication/signalling circuits to protect sensitive equipment with low resistability/immunity, providing the following features and benefits:

- Classification for the impulse test: categories C1, C2, C3, D1 (in accordance with IEC/EN 61643-21);
- S-ASI ... SPDs represent a pluggable execution and they provide continuity of the signal circuits. They do not interrupt when the plug in module is pulled out;
- Offers sensitive common and differential mode protection to connected devices;
- · Providing protection against direct and indirect lightning effects;
- The end of the life behaviour of the SPD is Short Circuit Mode (SCM);
- . The connection is made by screw type terminals providing best connection reliability;
- With integrated earth/protective ground connection via the top hat DIN rail and by screw type terminations PE and G.


RS 485 / RS 422 CAN - Bus

Model S-ASI 1 R		6	12	24	48	
CODE		342 006	342 012	342 024	342 048	
Number of protected Lines			1			
SPD impulse rating/Category			C1, C2,	C3, D1		
Nominal Voltage	Un	6 V dc/ 4,2 V ac	12 V dc/9 V ac	24 V dc/18 V ac	48 V dc/39 V ac	
Maximum Continuous Operating Voltage	Uc	7,2 V dc	14,4 V dc	28,8 V dc	57,6 V dc	
Rated Current	lL		0,5			
Category C1 - Nominal discharge current (8/20 µs) per wire	In		11	kΑ		
Category C1 - Voltage protection level at In (all modes)	Up	30 V dc	50 V dc	65 V dc	80 V dc	
Category C2 - Nominal discharge current (8/20 µs) per wire	In		15	kA		
Category C2 - Voltage protection level at In (all modes)	In	40 V dc	55 V dc	70 V dc	120 V dc	
Category C3 - Voltage protection level at 1 kV/µs (all modes)	Up	≤ 15 V	≤ 28 V	≤ 64 V	≤ 85 V	
Category D1 - impulse discharge current (10/350 µs) per wire	limp 10/350	2,5 kA				
Category D1 - Total discharge current (10/350 µs)	Total 10/350		5 I	kA		
Response time	ta		≤ 1	ns		
Bandwidth			1 N	1Hz		
Data Rate	С		1 Mi	bit/s		
Longitudinal impedance/resistance			1,8	Ω		
Parasitic capacitance			1,5	nF		
Operating temperature range			-25	+70 °C		
Terminal - conductor size			max. 1,5 m	ım² flexible		
Mounting	IP	indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715				
Housing		thermoplastic				
Degree of protection	IP	20				
Approximate weight			50	0		
Dimension: width			17,5 mm (	1 module)		



# Surge Protective Devices: ZOTUPSIGNAL


#### MODEL S-ASI 1 R ...



Typical protection scheme for applications according to the following standards: RS 485, RS 422, CAN-Bus and for 6, 12, 24 and 48 V DC.

The protection allows a data transmission up to 1 Mbit/s. The voltage protection level provided by these devices is not affected by the steepness of the transient.

#### MODEL S-ASI 2 R ...




RS 485 / RS 422 CAN - Bus


Model S-ASI 2 R		6	12	24	48
CODE		342 206	342 212	342 224	342 248
Number of protected Lines		2			
SPD impulse rating/Category			C1, C2,	C3, D1	
Nominal Voltage	Un	6 V dc/ 4,2 V ac	12 V dc/9 V ac	24 V dc/18 V ac	48 V dc/39 V ac
Maximum Continuous Operating Voltage	Uc	7,2 V dc	14,4 V dc	28,8 V dc	57,6 V dc
Rated Current	lL		0,	5 A	
Category C1 - Nominal discharge current (8/20 µs) per wire	In		1	kA	
Category C1 - Voltage protection level at In (all modes)	Up	30 V dc	50 V dc	65 V dc	80 V dc
Category C2 - Nominal discharge current (8/20 µs) per wire	In		15	kA	
Category C2 -Voltage protection level at In (all modes)	In	40 V dc	55 V dc	70 V dc	120 V dc
Category C3 - Voltage protection level at 1 kV/µs (all modes)	Up	≤ 15 V	≤ 28 V	≤ 64 V	≤ 85 V
Category D1 - Impulse discharge current (10/350 µs) per wire	limp 10/350	2,5 kA			
Category D1 - Total discharge current (10/350 µs) per line	Total 10/350		5	kA	
Response time	ta		≤ *	Ins	
Bandwidth			1 N	ЛHz	
Data Rate	С		1 M	bit/s	
Longitudinal impedance/resistance			1,8	ΒΩ	
Parasitic capacitance			1,5	nF	
Operating temperature range			-25	+70 °C	
Terminal - conductor size			max. 1,5 n	nm² flexible	
Mounting	IP	indo	oor, 35 x 7,5 mm top l	hat DIN rail IEC/EN 60	715
Housing				plastic	
Degree of protection	IP			0	
Approximate weight				) g	
Dimension: width			17,5 mm	(1 module)	












S-ASI ... G ...

DIN-rail socket + pluggable SPD-module

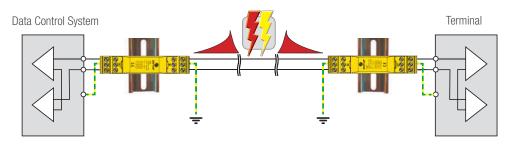

S-ASI ... G ... is an SPD for installation in series with the telecommunication/signalling circuits to protect sensitive equipment with low resistability/immunity, providing the following features and benefits:

- Classification for the impulse test: categories C1, C2, C3, D1 (in accordance with IEC/EN 61643-21);
- S-ASI ... SPDs represent a pluggable execution and they provide continuity of the signal circuits. They do not interrupt when the plug-in module is pulled out;
- Offers sensitive common and differential mode protection to connected devices;
- Providing protection against direct and indirect lightning effects;
- The connection is made by screw type terminals providing best connection reliability;
- With integrated earth/protective ground connection via the top hat DIN rail and by screw type terminations PE and G.


		CAMERAS	TELECOM analog		
Model S-ASI 1 G		48	110		
CODE		344 048	344 011		
Number of protected Lines		1			
SPD impulse rating/Category		C1, C2,	C3, D1		
Nominal Voltage	Un	48 V dc/39 V ac	110 V dc/78 V ac		
Maximum Continuous Operating Voltage	Uc	57,6 V dc	132 V dc		
Rated Current	l <sub>L</sub>	0,5	A		
Category C1 - Nominal discharge current (8/20 µs) per wire	l <sub>n</sub>	1 k	A		
Category C1 - Voltage protection level at In (all modes)	Up	≤ 500 V	≤ 550 V		
Category C2 - Nominal discharge current (8/20 µs) per wire	In	15 kA			
Category C2 - Voltage protection level at In (all modes)	Up	≤ 600 V	≤ 650 V		
Category C3 - Voltage protection level at 1 kV/µs (all modes)	Up	≤ 550 V	≤ 600 V		
Category D1 - Impulse discharge current (10/350 µs) per wire	limp 10/350	2,5	kA		
Category D1 - Total discharge current (10/350 µs) per line	Total 10/350	5 k	A		
Response time	ta	≤ 100	) ns		
Bandwidth		100 [	ИНZ		
Data Rate		100 M	bit/s		
Longitudinal impedance/resistance		0,8	Ω		
Parasitic capacitance	С	1,5	nF		
Operating temperature range		-25 +	-70 °C		
Terminals - conductor size		max. 1,5 m	m <sup>2</sup> flexible		
Mounting		indoor, 35 x 7,5 mm top h			
Housing		thermo			
Degree of protection	IP	20			
Approximate weight		50	· ·		
Dimension: width		17,5 mm ( <sup>-</sup>	module)		

TELECOM



# Surge Protective Devices: **ZOTUPSIGNAL**


#### MODEL S-ASI 1 G ...



Typical protection scheme with high discharge capability for high frequency data transmission interfaces and for applications in telecommunications.

The protection allows a data transmission up to 100 Mbit/s. The protection is equipped with decoupling resistances between the protection and the output circuit.

#### MODEL S-ASI 2 G ...



		CAMERAS	analog		
Model S-ASI 2 G		48	110		
CODE		344 248	344 211		
Number of protected Lines			2		
SPD impulse rating/Category		C1, C2, C3, D1			
Nominal Voltage	Un	48 V dc/39 V ac 110 V dc/78 V a			
Maximum Continuous Operating Voltage	Uc	57,6 V dc	132 V dc		
Rated Current	L	0,5			
Category C1 - Nominal discharge current (8/20 µs) per wire	<b>I</b> n	1	kA		
Category C1 - Voltage protection level at In (all modes)	Up	≤ 500 V	≤ 550 V		
Category C2 - Nominal discharge current (8/20 µs) per wire	<b>I</b> n	15	kA		
Category C2 - Voltage protection level at In (all modes)	Up	≤ 600 V	≤ 650 V		
Category C3 - Voltage protection level at 1 kV/µs (all modes)	Up	≤ 550 V	≤ 600 V		
Category D1 - Impulse discharge current (10/350 µs) per wire	imp 10/350	2,5	kA		
Category D1 - Total discharge current (10/350 µs) per line	Total 10/350	5 kA			
Response time	ta	≤ 10	0 ns		
Bandwidth		100	MHz		
Data Rate		100 N	Mbit/s		
Longitudinal impedance/resistance		0,8	3 Ω		
Parasitic capacitance	С	1,5	nF		
Operating temperature range		-25 ·	+70 °C		
Terminals - conductor size		max. 1,5 m	nm² flexible		
Mounting		indoor, 35 x 7,5 mm top I	nat DIN rail IEC/EN 60715		
Housing		thermo	pplastic		
Degree of protection	IP	2	· <del>*</del>		
Approximate weight		70	•		
Dimension: width		17,5 mm (	(1 module)		

CAMEDAC



## SPDs FOR SIGNALLING AND TELECOMMUNICATION

#### SPECIFIC SPDs WITH COAXIAL CONNECTORS

#### **Specific SPDs with coaxial connectors**

Typical installation: for the protection of TV switchboards, satellite antenna or wideband transmission equipment and remote systems. Particularly suitable for applications with long coaxial cables which are exposed to electromagnetic interference.

#### Features:


- SPDs with type F connectors for the protection of antenna circuits used in civil applications.
- SPDs with BCN type connectors for CCTV circuits.
- SPDs with 7/16 M/F type connection for coaxial cables of antenna circuits and telecommunication systems (4 and 3G).
- SPDs with special connectors/connection can be supplied upon request.


SPD	Model	Application icon	Impulse rating/ Category	Category D1 Impulse di- scharge current (10/350 µs) per wire	Category C2 Nominal di- scharge current (8/20 µs) per wire	Connection technique	Page
	C 5	<b>\$</b>	C2, C3, D1	2 kA	5 kA	F	123
	C 6	<b>4</b>	C2, C3	-	1 kA	BNC	124




# Surge Protective Devices: **ZOTUPCOAX**







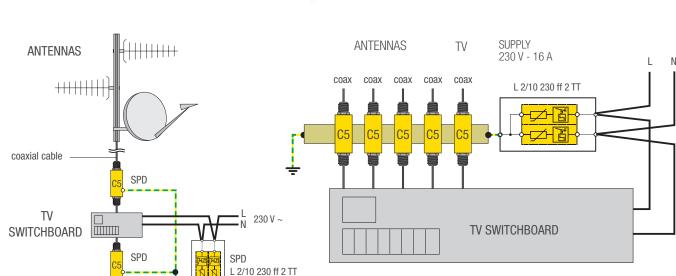

C 5 is an SPD for the protection of TV switchboards with ground or satellite antennas. It provides the following features and benefits:

- Particularly suitable for applications with coaxial cables longer than 40 m. (cable from the antenna to the switchboard or main cable from the television to the switchboard);
- Easy to install by fixing and connecting the SPD to ground via an integrated M4 bolt (e.g. directly to the equipotential bonding bar);
- Suitable for installation at LPZ boundaries up to 0<sub>B</sub> 2 in accordance with the lightning protection zones concept.
   Note: To complete the protection of the TV switchboard an adequate protection should also be provided on the power supply circuit, for example by installation of the L 2/10 230 ff 2 TT type SPD, code 202 220.

#### Model C 5

main coaxial cable


TV


Model 6 6		
CODE		351 075
SPD impulse rating/Category		C2, C3, D1
Impedance		75 Ω
Frequency range	f	up to 2,15 GHz
Maximum Continuous Operating Voltage	Uc	90 V dc
Category C2 - Nominal Discharge Current (8/20 µs)	In	5 kA
Category C2 - Voltage Protection level at In	Up	≤ 600 V
Category C3 - Voltage Protection level at 1 kV/µs	Up	≤ 600 V
Category D1 - Impulse discharge current (10/350 µs)	limp 10/350	2 kA
Typical attenuation	at	0,5 dB
Maximum power transmission		50 W
Connector type		F
Housing		metal
PG/PE-terminal		M4 bolt
Operating temperature range		- 25 + 55°C
Approximate weight		25 g
Dimensions		l 32 x h 22 x d 17 mm




#### Surge Protective Devices: **ZOTUPCOAX**







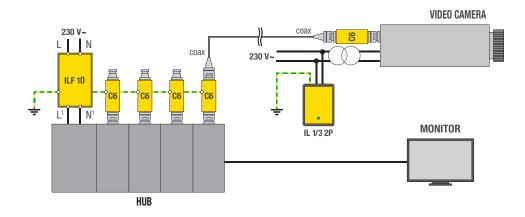

C 6 is an SPD for the protection of CCTV circuits, typilcally installed on each line close to the HUB and close to the video cameras, providing the following features and benefits:

- Particularly suitable for surveillance systems with connecting cables longer than 40 m.;
- Easy to install by fixing and connecting the SPD to ground via an integrated M5 bolt;
- Suitable for installation at LPZ boundaries up to  $0_8$  2 in accordance with the lightning protection zones concept.

Note: To complete the protection of the HUB an adequate protection should also be provided on the power supply circuit, for example by installation of an ILF 2P type SPD (Code 209 310). Protection of the video camera power supply can be provided e.g. by a type IL 1/3 2P SPD (code 241 001) close to the input terminals of the camera power supply (see schematic above).

#### Model C 6

model o o		
CODE		358 006
SPD impulse rating/Category		C2, C3
Video signal	Uo	1 V pp
Maximum Continuous Operating Voltage	Uc	6 V pp
Rated current	IL	300 mA
Impedance		75 Ω
Category C2 - Nominal Discharge Current (8/20 µs)	In	1 kA
Category C2 - Voltage Protection level at In	Up	≤ 22 V
Category C3 - Voltage Protection level at 1 kV/µs	Up	≤ 22 V
Cross sectional area		≥ 1 mm² flexible
Housing		thermoplastic
Operating temperature range		- 25 + 55 °C
Connector type		BNC female (input not protected)
		BNC male (output protected)
PG/PE-terminal		M5 bolt
Approximate weight		50 g
Dimensions		l 43 x h 48 x d 22 mm





# ZOTUP SPDs FOR SIGNALLING, TELECOMMUNICATION AND DATA TRANSMISSION

#### **SPDs FOR DATA TRANSMISSION**

SPDs for the protection of network equipment (HUBs/SWITCHES) in structured cabling systems in category 6.

- SPDs with impulse ratings for categories C1, C2, C3 and D1 (according to IEC/EN 61643-21).
- SPDs for rack and/or rail mounting to enable easy installation, even in existing systems.






#### SPDs FOR DATA TRANSMISSION


SPD	Model	Application icon	Impulse rating/ Category	Transmission category	Category D1 Impulse di- scharge current (10/350 µs) per wire	Category C2 Nominal di- scharge current (8/20 µs) per wire	Page
Marie Control	S-ASI 1 B 6	<b>\$</b>	C1, C2, C3, D1	-	2,5 kA	15 kA	128
	S-AS 1 B 12		C1, C2, C3, D1	-	2,5 kA	15 kA	128
	S-ASI 1 B 24		C1, C2, C3, D1	-	2,5 kA	15 kA	128
	S-ASI 1 B 48		C1, C2, C3, D1	-	2,5 kA	15 kA	128
TO NOTE OF THE PARTY OF THE PAR	S-ASI 2 B 6		C1, C2, C3, D1	-	2,5 kA	15 kA	129
THE RESERVE OF THE PERSON OF T	S-ASI 2 B 12		C1, C2, C3, D1	-	2,5 kA	15 kA	129
	S-ASI 2 B 24		C1, C2, C3, D1	-	2,5 kA	15 kA	129
	S-ASI 2 B 48		C1, C2, C3, D1	-	2,5 kA	15 kA	129
	S-F 1/6	7	C2, C3	6	-	1kA	130
	S-F 1/48 PoE +	4	C2, C3	6 A	-	1kA	130
	S-F 1/48 PoE + b		C2, C3	6 A	-	1kA	130












S-ASI ... B ...

DIN-rail socket + pluggable SPD-module

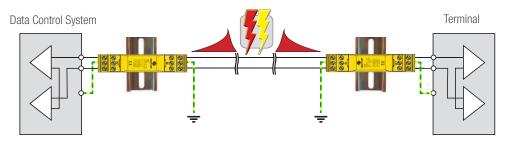

S-ASI ... B ... is an SPD for installation in series with the telecommunication/signalling circuits to protect sensitive equipment with low resistability/immunity, providing the following features and benefits:

- Classification for the impulse test: categories C1, C2, C3, D1 (in compliance with IEC/EN 61643-21);
- S-ASI ... SPDs represent a pluggable execution and they provide continuity of the signal circuits. They do not interrupt when the plug in module is pulled out;
- · Offers sensitive common and differential mode protection to connected devices;
- Providing protection against direct and indirect lightning effects;
- The end of the life behaviour of the SPD is Short Circuit Mode (SCM);
- The connection is made by screw type terminals providing best connection reliability;
- With integrated earth/protective ground connection via the top hat DIN rail and by screw type terminations PE and G.


#### PROFIBUS

Model S-ASI 1 B		6	12	24	48	
CODE		343 006	343 012	343 024	343 048	
Number of protected Lines			1			
SPD impulse rating/Category			C1, C2,	C3, D1		
Nominal Voltage	Un	6 V dc/ 4,2 V ac	12 V dc/9 V ac	24 V dc/18 V ac	48 V dc/39 V ac	
Maximum Continuous Operating Voltage	Uc	7,2 V dc	14,4 V dc	28,8 V dc	57,6 V dc	
Rated Current	lL		0,5	5 A		
Category C1 - Nominal discharge current (8/20 µs) per wire	In		11	kΑ		
Category C1 - Voltage protection level at In (all modes)	Up	70 V dc	80 V dc	150 V dc	220 V dc	
Category C2 - Nominal discharge current (8/20 µs) per wire	ln		15	kA		
Category C2 - Voltage protection level at In (all modes)	Up	110 V dc	130 V dc	180 V dc	260 V dc	
Category C3 - Voltage protection level at 1 kV/µs (all modes)	Up	$\leq 45 \text{ V}$	≤ 50 V	≤ 50 V	≤ 70 V	
Category D1 - Impulse discharge current (10/350 µs) per wire	limp 10/350		2,5	kA		
Category D1 - Total discharge current (10/350 µs)	Total 10/350		51	kΑ		
Response time	ta		≤ 1	ns		
Bandwidth			100	MHz		
Data Rate			100 N	/lbit/s		
Longitudinal impedance/resistance			1,8	βΩ		
Parasitic capacitance	С		1,5	nF		
Operating temperature range			-25	+70 °C		
Terminals - conductor size			max. 1,5 m	ım² flexible		
Mounting		indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715				
Housing		thermoplastic				
Degree of protection	IP	20				
Approximate weight			50	0		
Dimension: width			17,5 mm (	1 module)		



# Surge Protective Devices: ZOTUPSIGNAL

#### MODEL S-ASI 1 B ...




Typical protection scheme for high frequency data transmission interfaces. The protection allows data transmission up to 100 Mbit/s.

The voltage protection level provided by these devices is not affected by the steepness of the transient.

# S-ASI ... B ..

#### MODEL S-ASI 2 B ...



#### PROFIBUS

Model S-ASI 2 B		6	12	24	48	
CODE		343 206	343 212	343 224	343 248	
Number of protected Lines				2		
SPD impulse rating/Category			C1, C2	, C3, D1		
Nominal Voltage	Un	6 V dc/ 4,2 V ac	12 V dc/9 V ac	24 V dc/18 V ac	48 V dc/39 V ac	
Maximum Continuous Operating Voltage	Uc	7,2 V dc	14,4 V dc	28,8 V dc	57,6 V dc	
Rated Current	IL.		0,	5 A		
Category C1 - Nominal discharge current (8/20 µs) per wire	In		1	kA		
Category C1 - Voltage protection level at In (all modes)	Up	70 V dc	80 V dc	150 V dc	220 V dc	
Category C2 - Nominal discharge current (8/20 µs) per wire	In		15	kA		
Category C2 - Voltage protection level at In (all modes)	Up	110 V dc	130 V dc	180 V dc	260 V dc	
Category C3 - Voltage protection level at 1 kV/µs (all modes)	Up	≤ 45 V	≤ 50 V	≤ 50 V	$\leq 70 \text{ V}$	
Category D1 - Impulse discharge current (10/350 µs) per wire	limp 10/350	2,5 kA				
Category D1 - Total discharge current (10/350 µs) per line	Total 10/350		5	kA		
Response time	ta		≤ ′	1ns		
Bandwidth			100	MHz		
Data Rate			100	Mbit/s		
Longitudinal impedance/resistance			1,	ΒΩ		
Parasitic capacitance	С		1,5	5 nF		
Operating temperature range			-25	+70 °C		
Terminals - conductor size			max. 1,5 r	nm² flexible		
Mounting		indoor, 35 x 7,5 mm top hat DIN rail IEC/EN 60715				
Housing		thermoplastic				
Degree of protection	IP	20				
Approximate weight		) g				
Dimension: width		17,5 mm (1 module)				





### Surge Protective Devices: **ZOTUPSIGNAL**




S-F 1/48 PoE+








model S-F 1/6 Code 318 008 general layout for each of the four wire pairs in the line



model S-F 1/48 PoE+ Code 318 009 general layout for each of the four wire pairs in the line




model S-F 1/48 PoE+ b Code 318 010 general layout for each of the four wire pairs in the line

S-F 1/6 is an SPD for the protection of equipment connected to Category 6 A cable systems according to EN 50173-1. S-F 1/48 PoE+ and S-F 1/48 PoE+ b are SPDs for the protection of equipment connected to Category 6 A cable systems according IEEE 802.3 at and ISO/IEC 11801 for 10 GB applications.

They are equipped with RJ 45 female connectors. Typical applications are for the protection of cameras or CCTV systems connected via Ethernet cables, providing the following features and benefits:

- Suitable for installation at boundaries 1 2 and higher, in accordance with the lightning protection zones concept;
- Protection of all four wire pairs in each line;
- In patch panel boards the S-F 1/6 or S-F 1/48 PoE is installed between the incoming lines and the hub/switch.

Model S-F		1/6	1/48 PoE+	1/48 PoE+ b					
CODE		318 008	318 009	318 010					
SPD impulse rating / Category			C2, C3						
Number of protected lines	n	1 (four wire pairs)							
Nominal dc Voltage	Un	6 V	48 V	48 V					
Max. Continuous Operating Voltage (dc)	Uc	7,2 V	58 V	58 V					
Rated Line Current	IL	100 mA	1 A	1 A					
Category C2 - Nominal Discharge Current (8/20 µs) per wire	In	1 kA	1 kA	1 kA					
Category C2 - Voltage Protection level at In (all modes)	Up	≤ 15 V	≤ 120 V	≤ 600 V					
Category C3 - Voltage Protection level at 1 kV/µs (all modes)	Up	≤ 9 V	≤ 120 V	$\leq 600 \text{ V}$					
Data rate		100 Mbit/s	250 Mbit/s	250 Mbit/s					
Category (according IEEE 802.3 at)		6	6 A	6 A					
Bandwidth	f	500 MHz	500 MHz	500 MHz					
Typical attenuation at 500 MHz	ae	2,7 dB	2,7 dB	2,7 dB					
Maximum capacitance wire-wire	C	≤ 50 pF	≤ 50 pF	≤ 50 pF					
Operating temperature range		-40 +70 °C	-40 +70 °C	-40 +70 °C					
Connectors (input and output)		RJ 45 female	RJ 45 female	RJ 45 female					
Protected pairs		1/2, 3/6, 4/5, 7/8	1/2, 3/6, 4/5, 7/8	1/2, 3/6, 4/5, 7/8					
Mounting		indoor, 35 x 7,5 mm	indoor, 35 x 7,5 mm	indoor, 35 x 7,5 mm					
Mounting		top hat DIN rail IEC/EN 60715	top hat DIN rail IEC/EN 60715	top hat DIN rail IEC/EN 60715					
PE/PG connection		6,3 mm flat quick connect male	6,3 mm flat quick connect male	6,3 mm flat quick connect male					
FL/FG COINICCHOIT		tab + 1,5 mm <sup>2</sup> cable	tab + 1,5 mm <sup>2</sup> cable	tab + 1,5 mm <sup>2</sup> cable					
Approximate weight		105 g	105 g	105 g					
Dimentions		I 45 x h 31 x w 90 mm	I 45 x h 31 x w 90 mm	I 45 x h 31 x w 90 mm					

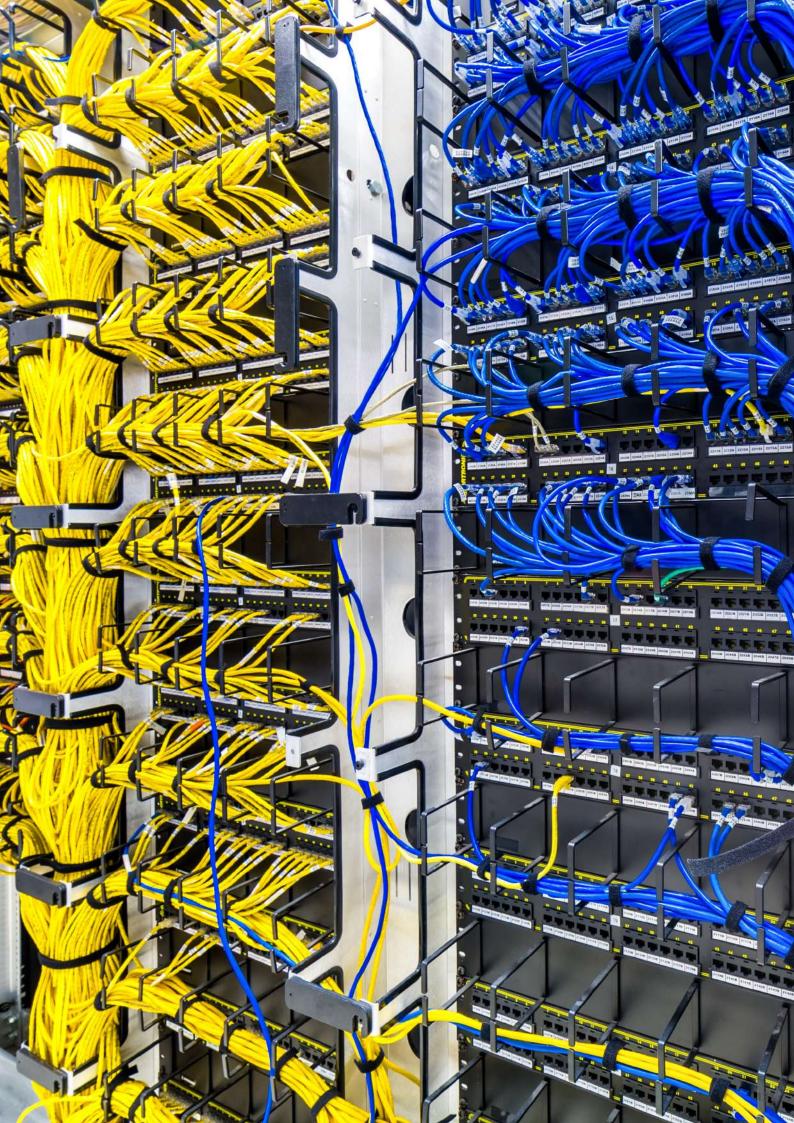






### SURGE ARRESTERS FOR HIGH VOLTAGE SYSTEMS (HV)

Surge Arresters are in accordance with IEC/EN 60099-4:2014 and their typical application is in the high voiltage distribution system for the protection of transformers, switchgear and transmission lines.

- Surge Arresters with a higher thermal energy rating than 4,5 kJ/kV are available upon request.
- Surge Arresters with silicone rubber housing providing big internal and external creepage distances suitable for all applications even with a high level of pollution.
- Surge Arresters available with external disconnector device, which is activated by an increase in internal pressure with a reliable operating mechanism and providing a stable characteristic even over long time.
- Additional impulse counters and impulse counters with analog meter for indication of the total leakage current (internal and external dispersion) are available.







#### ZOTUP SURGE ARRESTERS FOR HIGH VOLTAGE SYSTEMS (HV)

#### SURGE ARRESTERS FOR HIGH VOLTAGE SYSTEMS (HV)


#### **Alternating Current Systems (AC)**

SPD	Modello	Application icon	System voltage kV	Rated voltage kV	Thermal energy rating kJ/kV of Ur (IEC 60099-4 Ed. 3.0; 2014)	Nominal discharge current I <sub>n</sub> kA (8/20 µs)	Location	Page
	HV SL 12	<b>\$</b>	10	12	4,5	10	indoor + outdoor	137
	HV SL 18		15	18	4,5	10	indoor + outdoor	137
*	HV SL 24	<b>\$</b>	20	24	4,5	10	indoor + outdoor	137
•	HV SL 30		24	30	4,5	10	indoor + outdoor	137
*	HV SL 36	<b>\$</b>	30	36	4,5	10	indoor + outdoor	137

#### **Direct Current Systems (DC)**

SPD	Model	Application icon	System voltage V	Rated voltage kV	Line discharge class (IEC 60099-4 Ed. 2.2; 2009)	Thermal energy rating kJ/kV of Ur (IEC 60099-4 Ed. 3.0; 2014)	Nominal discharge current I <sub>n</sub> kA (8/20 µs)	Location	Page
*	HV DC 1/10	<b>5</b>	1000	1,0	DC-B	12	10	indoor + outdoor	141
-	HV DC 1,5/10		1500	1,5	DC-B	12	10	indoor + outdoor	141
*	HV DC 2/10	<b>5</b>	2000	2,0	DC-B	12	10	indoor + outdoor	141
*	HV DC 3/10	<b>5</b>	3000	3,0	DC-B	12	10	indoor + outdoor	141
*	HV DC 4/10	<b>5</b>	4000	4,0	DC-B	12	10	indoor + outdoor	141
*	HV DC 4,5/10	<b>5</b>	4500	4,5	DC-B	12	10	indoor + outdoor	141



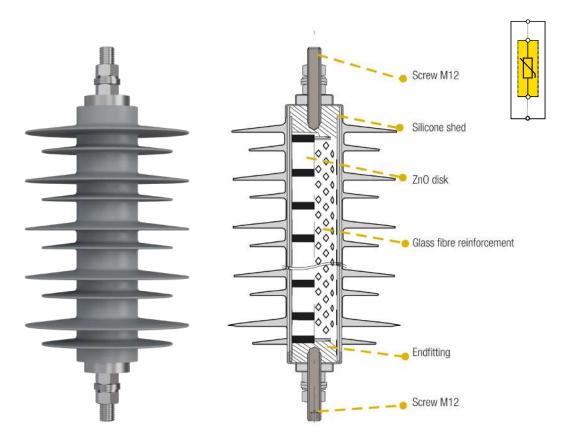

HV-SL is a medium/high voltage surge arrester for the protection of transformers, metalclad switchgear and transmission lines against atmospheric and switching overvoltages, ideal for indoor or outdoor applications and where a high level of pollution is expected, with the following features and benefits:

- Installation of these surge arresters on the HV -side simplifies the selection of the surge protective devices on the low voltage side (in TN or TT systems) which are intended to protect against transient phenomena coming from the line;
- Compliant with IEC/EN 60099-4;
- State of the art metal oxide surge arresters without a spark gap and with silicone rubber housing;
- Very high short-circuit current withstand;
- Size and volume of the surge arresters based on the practicable minimum for each nominal voltage;
- High tightening torque of the line terminals;
- The construction and manufacturing process prevent partial discharges;
- Sealed with aluminium fittings and terminated with stainless steel bolts, including nuts and washers.


#### Model HV-SL

Class (IEC 60099-4 Ed. 3.0; 2014)		Station Low SL
Thermal energy rating (IEC 60099-4 Ed. 3.0; 2014)	Wth	4,5 kJ/kV
Repetitive charge transfer rating	Qrs	1,2 C
Thermal charge transfer rating	Qth	1,1 C
Nominal discharge current	<b>I</b> n	10 kA
Rated voltage	Ur	from 3 kV to 60 kV
Rated frequency		from 48 Hz to 62 Hz
High current impulse		100 kA (4/10 μs)
Short-circuit current capability		63 kA
Ambient temperature range		- 60 + 60 °C
Altitude		up to 1000 m above sea level
Torsional strength		100 Nm
Specified short-time tensile strength		500 Nm
Specified long-term tensile strength		350 N
Insulator		silicone rubber HTV
Insulator colour		grey RAL 7040



Rated voltage	Continuos operating voltage		ary over- ge TOV	Ma	ax. residual	voltage / P	rotection le	vel	Switching impulse residual voltage			
Ur kV	Uc kV	1 sec. U1s kV	10 sec. U10s kV	10 kA (1/2 µs) STIPL kV	5 kA (8/20 µs) LIPL (U <sub>pl</sub> ) kV	10 kA (8/20 μs) LIPL (U <sub>pl</sub> ) kV	20 kA (8/20 μs) LIPL (U <sub>pl</sub> ) kV	40 kA (8/20 μs) LIPL (U <sub>pl</sub> ) kV	500 A (30/70 μs) SIPL (U <sub>ps</sub> ) kV	1.000 A (30/70 µs) SIPL (U <sub>ps</sub> ) kV	2.000 A (30/70 µs) SIPL (U <sub>ps</sub> ) kV	3.000 A (30/70 µs) SIPL (U <sub>ps</sub> ) kV
3	2,4	3,3	3,1	8,7	7,3	8,0	8,8	10,1	6,1	6,3	6,6	6,8
6	4,8	6,6	6,1	17,3	14,7	16,0	17,6	20,3	12,2	12,6	13,2	13,7
9	7,2	9,9	9,2	26,0	22,0	23,9	26,4	30,4	18,3	19,0	19,9	20,5
12	9,6	13,2	12,2	34,6	29,4	31,9	35,2	40,5	24,4	25,3	26,5	27,4
15	12,0	16,5	15,3	43,3	36,7	39,9	44,0	50,7	30,5	31,6	33,1	34,2
18	14,4	19,8	18,4	51,9	44,1	47,9	52,8	60,8	36,6	37,9	39,7	41,0
21	16,8	23,1	21,4	60,6	51,4	55,9	61,6	70,9	42,7	44,2	46,4	47,9
24	19,2	26,4	24,5	69,3	58,8	63,8	70,4	81,1	48,8	50,6	53,0	54,7
27	21,6	29,7	27,5	77,9	66,1	71,8	79,2	91,2	54,9	56,9	59,6	61,5
30	24,0	33,0	30,6	86,6	73,5	79,8	88,0	101,3	61,0	63,2	66,2	68,4
33	26,4	36,3	33,7	95,2	80,8	87,8	96,8	111,5	67,2	69,5	72,9	75,2
36	28,8	39,6	36,7	103,9	88,2	95,8	105,6	121,6	73,3	75,8	79,5	82,1
39	31,2	42,9	39,8	112,6	95,5	103,7	114,4	131,7	79,4	82,2	86,1	88,9
42	33,6	46,2	42,8	121,2	102,9	111,7	123,2	141,9	85,5	88,5	92,7	95,7
45	36,0	49,5	45,9	129,9	110,2	119,7	132,0	152,0	91,6	94,8	99,4	102,6
48	38,4	52,8	49,0	138,5	117,6	127,7	140,8	162,2	97,7	101,1	106,0	109,4
51	40,8	56,0	52,0	147,0	125,0	136,0	150,0	172,0	104,0	107,0	113,0	116,0
54	43,2	59,0	55,0	156,0	132,0	144,0	158,0	182,0	110,0	114,0	119,0	123,0
60	48,0	66,0	61,0	173,0	147,0	160,0	176,0	203,0	122,0	126,0	132,0	137,0

#### Power frequency voltage versus time characteristcs (TOV) (pre-heated to 60 °C)

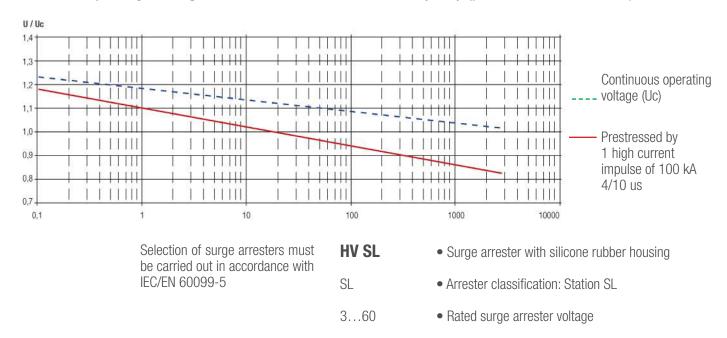

NOTE:

All surge arresters HV SL have an increased creepage distance.






Rated voltage	Height	Creepage distance total	Weight	Surge	Surge arrester insulation			ter distance	Model	CODE
Ur kV	h mm	mm	kg	Withstand voltage (dry) Unstw kV	Withstand voltage (wet) Unstw kV	Lightning impulse withstand Unsts kV	Phase/ Phase LL mm	Phase/ Ground LE mm	HV SL	
3	120	387	1	34	22	50	156	108	3	130 403
6	164	574	1	42	26	60	156	128	6	130 406
9	164	574	1	48	32	70	181	148	9	130 409
12	208	762	2	56	39	82	201	168	12	130 412
15	208	762	2	60	40	86	221	183	15	130 415
18	208	762	2	64	42	92	246	203	18	130 418
21	252	950	3	70	46	104	266	223	21	130 421
24	252	950	3	78	52	114	291	243	24	130 424
27	296	1.137	3	82	54	120	311	258	27	130 427
30	296	1.137	3	94	62	136	331	278	30	130 430
33	340	1.325	4	100	66	146	356	298	33	130 433
36	340	1.325	4	126	84	184	381	318	36	130 436
39	340	1.325	4	134	88	194	396	333	39	130 439
42	384	1.513	4	142	94	206	421	353	42	130 442
45	384	1.513	4	152	100	222	446	373	45	130 445
48	428	1.700	5	156	104	226	471	393	48	130 448
51	428	1.700	5	168	112	246	486	408	51	130 451
54	428	1.700	5	266	176	386	511	428	54	130 454
60	470	1.886	6	266	176	386	561	468	60	130 460

In order to simplify selection and ordering, the most common configurations and system voltages on the European grid (impedance earthed neutral and protection relyas for the elimination of the earth faults) are indicated below. This recommended dimensioning is also suitable for system configurations as indicated in Italian CEI 0-16.

For systems with operating voltage 10 kV	(HV SL 12)	N.3	COD. 130 412
	(HV 7)	N.3	COD. 107 000
	(HV 4)	N.3	COD. 104 000
For systems with operating voltage 15 kV	(HV SL 18)	N.3	COD. 130 418
	(HV 7)	N.3	COD. 107 000
	(HV 4)	N.3	COD. 104 000
For systems with operating voltage 20 kV	(HV SL 24)	N.3	COD. 130 424
	(HV 7)	N.3	COD. 107 000
	(HV 4)	N.3	COD. 104 000
For systems with operating voltage 24 kV	(HV SL 30)	N.3	COD. 130 430
	(HV 7)	N.3	COD. 107 000
	(HV 4)	N.3	COD. 104 000
For systems with operating voltage 30 kV	(HV SL 36)	N.3	COD. 130 436
	(HV 7)	N.3	COD. 107 000
	(HV 4)	N.3	COD. 104 000

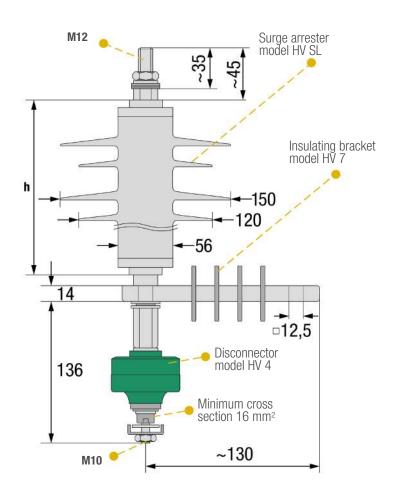







#### Insulating bracket model HV 7


This insulating support is necessary to support the lower arrester end, when the disconnector device model HV 4 is applied. This fixes the arrester and avoids leakage currents to ground.

#### Model HV 7

CODE	107 000
Max. applicable voltage	30 kV



#### **Disconnector characteristic**



#### Disconnector device model HV 4

Surge arresters for high voltage systems are often equipped with a disconnector that permits the disconnection of the surge arrester in case of an internal fault. This disconnection prevents a persistent fault in the network and provides a visual indication that the surge arrester is defective. The disconnector is activated by an increase in internal pressure due to the electric arc caused by the sublimation of the internal connecting wire as a result of the fault current. The operating mechanism is very reliable and the characteristic remains constant even over long period of time.


NOTE: It is important to ensure that sufficient insulating distance is kept for parts remaining energised after the detachment of the lower part of the disconnector.


#### Model HV 4

Wodel IIV 4	
CODE	104 000
Nominal discharge current (8/20 µs)	10 kA
Frequency	48 - 62 Hz
Altitude	Up to 3000 m above sea level
Housing	Polyethylene with a low pressure rating, stabilized against UV
Minimum cross section and lenght for connection	16 mm <sup>2</sup> flexible / 300 mm





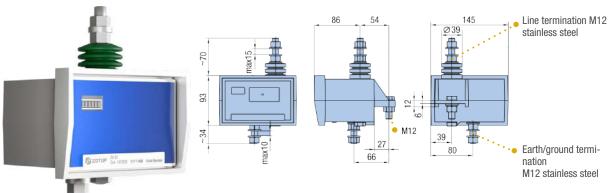

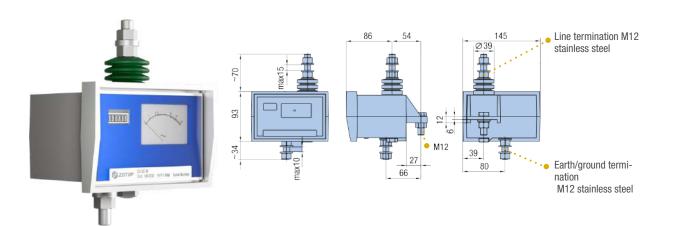

#### Lightning surge counter models HV SC and HV SC-M

In compliance with the standards IEC/EN 62561-6.

The installation of the lightning surge counter must be combined with a surge arrester mounted with an insulating support. Lightning surge counters do not require a power supply, they are installed at the earth/ground terminal of a single surge arrester or at the common earth/ground connection of a group of arresters.

The HV SC model is capable of counting surges to ground.

The HV SC-M model counts surges to ground and provides an indication of the total leakage current via an analogue meter. A significant change in the value of the indicated current after installation shows a deterioration of the surge arrester or an increased level of pollution on its outer insulator surface.

Both models can, upon request, be supplied with an auxiliary contact for remote monitoring of the counting.

Model		HV SC	HV SC-M
CODE		105 000	106 000
Classification according to IEC/EN 62561-6		Type II	Type II
Minimum discharge current counted (8/20 μs)	In min	100 A	100 A
Maximum discharge current counted (8/20 μs)	In max	100 kA	100 kA
Residual voltage at 100 kA 4/10 µs		6 kV peak	6 kV peak
Surge counter		6 digit	6 digit
Maximum counting frequency		5/second	5/second
Analogue leakage current meter		-	0-30 mA Peak/√2

Model with remote signal contact	HV SC t	HV SC-M t
CODE	105 001	106 001
Remote signal contact	Potential free norr	nally open contact
Terminal-conductor size for remote signal contact	max. 1,5 n	nm² flexible
Switching capacity	ac: 250 V / 0,5 A - dc: 1	25 V / 0,2 A; 75 V / 0,5 A











HV DC is a surge arrester for application in direct current systems and particularly for electric traction systems (railway, underground).

#### It provides the following features and benefits:

- varistor based surge arrester with limiting operation for protection of direct current systems against overvoltages, able to withstand lightning currents;
- This SPD is Installed in a vertical position, either hooked on overhead lines or mounted on electric motors;
- Its high mechanical resistance to bumps and vibrations complies with IEC/EN 60068 part 2-29;
- Its silicone rubber housing with long creepage distance allows indoor and outdoor mounting;
- Its nominal discharge capability In is 10 kA (8/20);
- It is available with continuous operating voltages from 1 to 4kV DC.;
- Size and volume of the surge arresters based on the practicable minimum for each rated voltage;
- The insulator of the surge arrester is characterized by the absence of junction lines;
- The construction and manufacturing process prevent partial discharges;
- Sealed with aluminium fittings and terminated with stainless steel clamps, screws and washers.

#### Model HV DC -/10


Rated voltage	Ur	from 1,2 kV to 4,8 kV
Nominal discharge current	ln	10 kA
High current impulse	lhc	100 kA 4/10 μs
Long duration impulse current		1000 A / 2 ms
Arrestor class in accordance with EN 50526-1; 2012		DC-B
Thermal energy rating kJ/kV (IEC 60099-4 Ed. 3.0; 2014)		10 (10 kJ/kV a Ur)
Line discharge class (based on IEC 60099-4 Ed. 2.2; 2009)		4
Rated short circuit current		40 kA / 0,2 s
Resistance to mechanical impact, according IEC/EN 60068 part 2-29		15 g
Resistance to vibration IEC/EN 60068 part 2-6		3 g (10 - 500 Hz)
Ambient temperature range		- 40 + 55 °C
Altitude		up to 1000 m above sea level*
Insulator		silicone rubber HTV
Insulator colour		grey RAL 7040

<sup>\*</sup> for application at altitudes above 1000 m apply apply altitude correction factors according IEC




Rated voltage	Continuous operating voltage		Max. residual voltage / Protection level					Height	Total creepage distance	Weight	0	arrester ation	Model	CODE	
Ur kV	Uc kV	10 kA 1/2 μs kV	5 kA 8/20 μs U <sub>pl</sub> kV	10 kA 8/20 μs U <sub>pl</sub> kV	20 kA 8/20 μs U <sub>pl</sub> kV	250 A 30/70 μs U <sub>ps</sub> kV	500 A 30/70 μs U <sub>ps</sub> kV	1000 A 30/70 μs U <sub>ps</sub> kV	h mm	mm	kg	Withstand voltage wet Unst kV	Lightning impulse withstand wet Unsch kV	HV DC	
1,0	1,0	2,7	2,5	2,6	2,8	2,0	2,1	2,1	115	320	3,1	≥ 35	≥ 123	1/10	111 001
1,5	1,5	3,7	3,5	3,7	3,9	2,8	2,9	3,0	115	320	3,2	≥ 35	≥ 123	1,5/10	111 005
2,0	2,0	5,1	4,8	5,0	5,4	3,9	4,0	4,1	115	320	3,3	≥ 35	≥ 123	2/10	111 002
3,0	3,0	7,5	6,9	7,3	7,9	5,7	5,8	6,0	115	320	3,4	≥ 35	≥ 123	3/10	111 003
4,0	4,0	10,2	9,5	10,0	10,8	7,8	8,0	8,2	115	320	3,1	≥ 35	≥ 123	4/10	111 004
4,5	4,5	11,5	10,7	11,3	12,2	8,8	9,0	9,2	115	320	3,4	≥ 35	≥ 123	4,5/10	111 006

#### Power frequency voltage versus time characteristic (TOV) (pre heated to 60 °C)

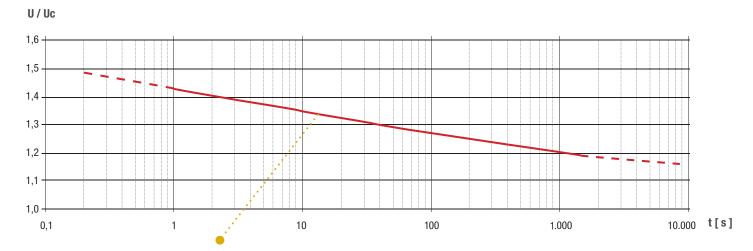

Pre stressed by 1 high current impulse of 100 kA 4/10  $\mu s$ 

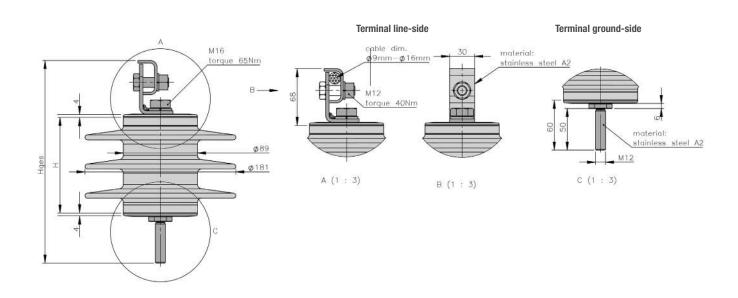



### INDEX Data Sheet

CODE	MODEL	PAGE	GITIN (EAN)	CODE	MODEL	PAGE	GITIN (EAN)
104 000	HV 4	138	8054890320009	200 130	L 3/30 230 ff 3	66	8054890320450
105 000	HV SC	139	8054890320016	200 140	L 3/30 230 ff 4	67	8054890320467
105 001	HV SC t	139	8054890320023	200 141	L 3/30 230 ff 3+1	69	8054890320474
106 000	HV SC-M	139	8054890320030	200 600	L 7/30 DC 230 ff	102	8054890320290
106 001	HV SC-M t	139	8054890320047	200 602	L 7/30 DC 60 ff	102	8054890320306
107 000	HV 7	138	8054890320054	200 603	L 7/30 DC 110 ff	102	8054890320313
111 001	HV DC 1/10	141	8054890322287	200 606	L 7/30 DC 600 ff	102	8054890320320
111 002	HV DC 2/10	141	8054890322294	200 610	L 7/30 DC 1000 ff	102	8054890320337
111 003	HV DC 3/10	141	8054890322300	200 612	L 7/30 DC 1000 ff 2	103	8054890322409
111 004	HV DC 4/10	141	8054890322355	200 620	L 7/30 DC 230 ff 2	103	8054890322416
111 005	HV DC 1,5/10	141	8054890322362	200 622	L 7/30 DC 60 ff 2	103	8054890322423
111 006	HV DC 4,5/10	141	8054890322379	200 623	L 7/30 DC 110 ff 2	103	8054890322430
130 403	HV SL 3	137	8054890322706	200 626	L 7/30 DC 600 ff 2	103	8054890322447
130 406	HV SL 6	137	8054890322713	202 100	L 2/10 230 ff	70	8054890320504
130 409	HV SL 9	137	8054890322720	<b>202 120</b>	L 2/10 230 ff 2	71	8054890320511
130 412	HV SL 12	137	8054890322737	202 121	L 2/10 230 ff 1+1	73	8054890320528
130 415	HV SL 15	137	8054890322744	202 140	L 2/10 230 ff 4	72	8054890320535
130 418	HV SL 18	137	8054890322751	202 141	L 2/10 230 ff 3+1	74	8054890320542
130 421	HV SL 21	137	8054890322768	202 220	L 2/10 230 ff 2 TT	75	8054890321723
130 424	HV SL 24	137	8054890322775	202 240	L 2/10 230 ff 4 TT	76	8054890321730
130 427	HV SL 27	137	8054890322782	203 100	IA 25 230	44	8054890320566
130 430	HV SL 30	137	8054890322799	203 120	IA 25 230 2	45	8054890320573
130 433	HV SL 33	137	8054890322805	203 121	IA 25 230 1+1	47	8054890320580
130 436	HV SL 36	137	8054890322812	203 140	IA 25 230 4	46	8054890320597
130 439	HV SL 39	137	8054890322829	203 141	IA 25 230 3+1	48	8054890320603
130 442	HV SL 42	137	8054890322836	204 100	L 13/40 230 ff	50	8054890320658
130 445	HV SL 45	137	8054890322843	204 120	L 13/40 230 ff 2	51	8054890320665
130 448	HV SL 48	137	8054890322850	204 121	L 13/40 230 ff 1+1	54	8054890320672
130 451	HV SL 51	137	8054890322867	204 130	L 13/40 230 ff 3	52	8054890320689
130 454	HV SL 54	137	8054890322874	204 140	L 13/40 230 ff 4	53	8054890320696
130 460	HV SL 60	137	8054890322881	204 141	L 13/40 230 ff 3+1	55	8054890320702
200 023	L 2/20 230 1+1	86	8054890322331	206 300	I 52 N-PE	56	8054890320726
200 025	L 2/20 230 3+1	87	8054890322348	207 100	L 7/30 230 ff	58	8054890320733
200 100	L 3/30 230 ff	64	8054890320399	207 104	L 7/30 400 ff	58	8054890320740
200 102	L 3/30 60 ff	64	8054890320405	207 106	L 7/30 600 ff	58	8054890320757
200 103	L 3/30 120 ff	64	8054890320412	207 107	L 7/30 750 ff	58	8054890320764
200 104	L 3/30 400 ff	64	8054890320429	207 110	L 7/30 1000 ff	58	8054890321778
200 120	L 3/30 230 ff 2	65	8054890320436	207 120	L 7/30 230 ff 2	59	8054890320771
200 121	L 3/30 230 ff 1+1	68	8054890320443	207 121	L 7/30 230 ff 1+1	62	8054890320788



### INDEX Data Sheet

CODE	MODEL	PAGE	GITIN (EAN)	CODE	MODEL	PAGE	GITIN (EAN)
207 130	L 7/30 230 ff 3	60	8054890320795	210 623	L 7/30 DC 110 t ff 2	103	8054890322485
207 134	L 7/30 400 ff 3	60	8054890322263	210 626	L 7/30 DC 600 t ff 2	103	8054890322492
207 137	L 7/30 750 ff 3	60	8054890320801	212 100	L 2/10 230 t ff	70	8054890321143
207 140	L 7/30 230 ff 4	61	8054890320818	212 120	L 2/10 230 t ff 2	71	8054890321150
207 141	L 7/30 230 ff 3+1	63	8054890320825	212 121	L 2/10 230 t ff 1+1	73	8054890321167
207 220	IL 4/20 400 ff 2 IT	78	8054890322669	212 140	L 2/10 230 t ff 4	72	8054890321174
207 224	IL 4/20 690 ff 2 IT	80	8054890322546	212 141	L 2/10 230 t ff 3+1	74	8054890321181
207 226	IL 4/20 830 ff 2 IT	82	8054890322621	<b>212 220</b>	L 2/10 230 t ff 2 TT	75	8054890321754
207 230	IL 4/20 400 ff 3 IT	79	8054890322553	<b>212 240</b>	L 2/10 230 t ff 4 TT	76	8054890321761
207 234	IL 4/20 690 ff 3 IT	81	8054890322645	<b>214 100</b>	L 13/40 230 t ff	50	8054890321235
207 236	IL 4/20 830 ff 3 IT	83	8054890322584	<b>214 120</b>	L 13/40 230 t ff 2	51	8054890321280
207 300	I 12 N-PE	77	8054890320849	214 121	L 13/40 230 t ff 1+1	54	8054890321297
208 300	I 100 N-PE	49	8054890320870	<b>214 130</b>	L 13/40 230 t ff 3	52	8054890321310
209 310	ILF 2P 10 DIN	98	8054890320344	<b>214 140</b>	L 13/40 230 t ff 4	53	8054890321334
209 320	ILF 2P 16 DIN	98	8054890320351	214 141	L 13/40 230 t ff 3+1	55	8054890321341
209 325	ILF 2P 25 DIN	98	8054890320368	<b>215 100</b>	L 25/100 230 t ff	38	8054890321365
210 023	L 2/20 230 t 1+1	86	8054890321266	<b>215 120</b>	L 25/100 230 t ff 2	39	8054890321372
210 025	L 2/20 230 t 3+1	87	8054890320856	215 121	L 25/100 230 t ff 1+1	42	8054890321389
210 100	L 3/30 230 t ff	64	8054890320986	<b>215 130</b>	L 25/100 230 t ff 3	40	8054890321396
210 102	L 3/30 60 t ff	64	8054890320993	<b>215 140</b>	L 25/100 230 t ff 4	41	8054890321402
210 103	L 3/30 120 t ff	64	8054890321006	215 141	L 25/100 230 t ff 3+1	43	8054890321419
210 104	L 3/30 400 t ff	64	8054890321013	<b>216 106</b>	L 13/60 PV Y 600 ff	104	8054890321242
210 106	L 3/40 PV Y 600 ff	105	8054890321020	216 110	L 13/60 PV Y 1000 ff	104	8054890321259
210 110	L 3/40 PV Y 1000 ff	105	8054890321037	216 116	L 13/60 PV Y 600 t ff	104	8054890321273
210 116	L 3/40 PV Y 600 t ff	105	8054890321051	<b>216 126</b>	L 13/60 PV Y 1000 t ff	104	8054890321303
210 120	L 3/30 230 t ff 2	65	8054890321068	216 300	I 52 N-PE t	56	8054890321488
210 121	L 3/30 230 t ff 1+1	68	8054890321075	217 100	L 7/30 230 t ff	58	8054890321495
210 126	L 3/40 PV Y 1000 t ff	105	8054890321082	217 104	L 7/30 400 t ff	58	8054890321501
210 130	L 3/30 230 t ff 3	66	8054890321099	217 106	L 7/30 600 t ff	58	8054890321518
210 140	L 3/30 230 t ff 4	67	8054890321112	217 107	L 7/30 750 t ff	58	8054890321525
210 141	L 3/30 230 t ff 3+1	69	8054890321129	217 110	L 7/30 1000 t ff	58	8054890321785
210 600	L 7/30 DC 230 t ff	102	8054890320559	217 120	L 7/30 230 t ff 2	59	8054890321532
210 602	L 7/30 DC 60 t ff	102	8054890320610	217 121	L 7/30 230 t ff 1+1	62	8054890321549
210 603	L 7/30 DC 110 t ff	102	8054890320627	217 130	L 7/30 230 t ff 3	60	8054890321556
210 606	L 7/30 DC 600 t ff	102	8054890320634	217 134	L 7/30 400 t ff 3	60	8054890322270
210 610	L 7/30 DC 1000 t ff	102	8054890320641	217 137	L 7/30 750 t ff 3	60	8054890321563
210 612	L 7/30 DC 1000 t ff 2	103	8054890322454	217 140	L 7/30 230 t ff 4	61	8054890321570
210 620	L 7/30 DC 230 t ff 2	103	8054890322461	217 141	L 7/30 230 t ff 3+1	63	8054890321587
210 622	L 7/30 DC 60 t ff 2	103	8054890322478	217 220	IL 4/20 400 t ff 2 IT	78	8054890322652



## INDEX Data Sheet

CODE	MODEL	PAGE	GITIN (EAN)
217 224	IL 4/20 690 t ff 2 IT	80	8054890322539
217 226	IL 4/20 830 t ff 2 IT	82	8054890322614
217 230	IL 4/20 400 t ff 3 IT	79	8054890322522
217 234	IL 4/20 690 t ff 3 IT	81	8054890322638
217 236	IL 4/20 830 t ff 3 IT	83	8054890322577
217 300	I 12 N-PE t	77	8054890321594
218 121	L 50/100 230 t ff 1+1	36	8054890322508
218 141	L 50/100 230 t ff 3+1	37	8054890322515
219 310	ILF 2P 10 t DIN	98	8054890322218
219 314	ILF 4P 125	94	8054890320887
219 320	ILF 2P 16 t DIN	98	8054890322225
219 325	ILF 2P 25 t DIN	98	8054890322232
219 330	ILF 2P 40	96	8054890320900
219 334	ILF 4P 40	94	8054890320917
219 344	ILF 4P 400	92	8054890320924
219 350	ILF 2P 63	96	8054890320931
219 354	ILF 4P 63	94	8054890320948
219 374	ILF 4P 250	92	8054890320955
219 380	ILF 2P 80	96	8054890320962
219 384	ILF 4P 80	94	8054890320979
220 001	L 2/20 230 e	85	8054890322324
241 001	IL 1/3 2P	84	8054890320375
<b>241 002</b>	IL 1/10 2P M	84	8054890320382
242 190	LLP 2/10 230 ff 1+1	109	8054890321815
242 191	LLP 7/30 230 ff 1+1	108	8054890321822
244 100	Protection Box TN 40 ff	57	8054890321846
245 100	Protection Box TT 40 ff	57	8054890321860
249 591	CP 1	88	8054890321105
249 592	CP 2	88	8054890321136
<b>249 593</b>	CP 3	88	8054890321198
249 594	CP 4	88	8054890321204
249 595	CP 5	88	8054890321211
<b>249 596</b>	CP 6	88	8054890321228
249 597	CP 7	88	8054890320719
249 598	CP 8	88	8054890320832
302 524	S-AS 2 24/1	115	8054890321327
302 548	S-AS 2 48/1	115	8054890321358
318 008	S-F 1/6	130	8054890321426
318 009	S-F 1/48 PoE+	130	8054890321433

CODE	MODEL	PAGE	GITIN (EAN)
318 010	S-F 1/48 PoE+ b	130	8054890321440
341 006	S-ASI 1 L 6	116	8054890321839
341 012	S-ASI 1 L 12	116	8054890321853
341 024	S-ASI 1 L 24	116	8054890321877
341 048	S-ASI 1 L 48	116	8054890321884
341 206	S-ASI 2 L 6	117	8054890321891
341 212	S-ASI 2 L 12	117	8054890321907
341 224	S-ASI 2 L 24	117	8054890321914
341 248	S-ASI 2 L 48	117	8054890321921
342 006	S-ASI 1 R 6	118	8054890321938
342 012	S-ASI 1 R 12	118	8054890321945
342 024	S-ASI 1 R 24	118	8054890321952
342 048	S-ASI 1 R 48	118	8054890321969
342 206	S-ASI 2 R 6	119	8054890321976
342 212	S-ASI 2 R 12	119	8054890321983
342 224	S-ASI 2 R 24	119	8054890321990
342 248	S-ASI 2 R 48	119	8054890322003
343 006	S-ASI 1 B 6	128	8054890322010
343 012	S-ASI 1 B 12	128	8054890322027
343 024	S-ASI 1 B 24	128	8054890322034
343 048	S-ASI 1 B 48	128	8054890322041
343 206	S-ASI 2 B 6	129	8054890322058
343 212	S-ASI 2 B 12	129	8054890322065
343 224	S-ASI 2 B 24	129	8054890322072
343 248	S-ASI 2 B 48	129	8054890322089
344 011	S-ASI 1 G 110	120	8054890322188
344 048	S-ASI 1 G 48	120	8054890322096
344 211	S-ASI 2 G 110	121	8054890322201
344 248	S-ASI 2 G 48	121	8054890322195
351 075	C 5	123	8054890321600
358 006	C 6	124	8054890321648


All information and illustrations contained in the Catalogue are to be considered purely indicative and they are only meant to illustrate the product, therefore, the same may at any time be subject to change in order to comply with development requirements or regulations.



#### SERVICE

#### ZOTUP® S.r.I.

provides high quality technical supportto designers, dealers, installers.



Our technical staff is able to:

- Support you with systems sizing;
- Suggest you the nearest dealers;
- Provide you with technical support on field.



**ZOTUP.COM** 



#### ZOTUP® S.r.I.

Via Agostino Depretis, 11 - 24124 BERGAMO - ITALY VAT N. IT01734950163 - Ph. +39 035 361035

info@zotup.it - www.zotup.com

